

09/06/00
j4912 U.S. PTO

09-0700

Attorney Docket No. 2271/63036

Total Pages 3

Express Mail Label No. EM169952281US

A
j4813 U.S. PTO
09/06/00
09/656414

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application

Washington, D. C. 20231

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) are the specification and claims of the nonprovisional patent application of:

Hiroshi TAMURA

for

Inventor

INTERNET FACSIMILE GATEWAY DEVICE

Title of Invention

APPLICATION ELEMENTS ENCLOSED:

1. X Specification (total pages 118) including:
 - a. 26 pages of claims (45 claims)
 - b. 1 page Abstract
2. X 39 sheets of informal X formal drawings (Figs. 1-28C)
3. X Oath or declaration of Applicant (2 total pages)
 - a. X Newly executed (original or copy)
 - b. Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Item 14 completed)
4. Deletion of Inventor(s)
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b)
5. Incorporation By Reference
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied in item 3b is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. Microfiche Computer Program (Appendix)

APPLICATION PARTS ENCLOSED:

7. X An assignment of the invention to Ricoh Company, Ltd. (cover sheet & document(s))
8. 37 CFR 3.73(b) Statement (when there is an assignee)
9. X Power of Attorney
 - a. X Newly executed (original or copy)
 - b. Copy from a prior application

10. X Information Disclosure Statement (IDS)/PTO-1449
X Copies of IDS Citations
11. A Preliminary Amendment
12. X Return Receipt Postcard (MPEP 503)
13. A small entity statement under 37 C.F.R. §1.9 and §1.27
 Statement filed in prior application, status still proper and desired
14. If a Continuing Application, *check the appropriate box and supply the requisite information:*
- ☐ Continuation of prior application No.: filed
- ☐ Divisional of prior application No.: filed
- ☐ Continuation-in-part (CIP) of prior application No.: filed
15. Amend the specification by inserting before the first line of page one: --This is a continuation
 divisional of application Serial No. filed .--
16. X Priority of application Nos. 11-251035 and 2000-045560 filed in Japan on September 6, 1999
and February 23, 2000. Applicant hereby claims priority under 35 U.S.C. § 119.
X A certified copy of priority application No. 11-251035 and 2000-045560 is enclosed
 A certified copy of priority application No. has been filed in prior application
S.N. filed
17. Other (identify)

The filing fee is calculated as follows:

CLAIMS AS FILED, LESS ANY CLAIMS CANCELLED BY AMENDMENT

					Rate			Fee	
	Number Filed		Number Extra*		Small Entity	Other Entity		Small Entity	Other Entity
Total Claims	45-20	=	25	x	\$ 9	\$ 18	=	\$	\$ 450
Indep. Claims	4-3	=	1	x	\$ 39	\$ 78	=	\$	\$ 78
Multiple Dependent Claims Presented: Yes <u> </u> No <u>X</u>					\$130	\$260	=	\$	\$ 0
If the difference in column 1 is less than zero, enter "0" in column 2					Basic Fee			\$ 345	\$ 690
					Total Fee				\$ 1,218

18. X A check in the amount of \$1,218.00 to cover the filing fee.
19. Please charge Deposit Account No. 03-3125 in the amount of \$ 40.00 for recordation of the Assignment.
20. X The Commissioner is hereby authorized to charge any additional fees which may be required in connection with the following or credit any overpayment to Deposit Account No. 03-3125.
- X Filing fees under 37 C.F.R. § 1.16.
- X Patent application processing fees under 37 C.F.R. §1.17.
- The issue fee set in 37 C.F.R. §1.18 at or before mailing of the Notice of Allowance, pursuant to 37 C.F.R. §1.311(b).
21. X Three copies of this sheet are enclosed.
22. Other (identify) _____

CORRESPONDENCE ADDRESS:

RICHARD F. JAWORSKI
Registration No. 33,515
Cooper & Dunham LLP
1185 Avenue of the Americas
New York, New York 10036
United States of Americas
Tel.: (212) 278-0400
Fax: (212) 391-0525

Respectfully submitted,

Amos A. Phelps

RICHARD F. JAWORSKI, Reg. No. 33,515
Attorney for Applicant
c/o Cooper & Dunham LLP
1185 Avenue of the Americas
New York, New York 10036
Tel.: (212) 278-0400

009060"449560

SPECIFICATION

TO ALL WHOM IT MAY CONCERN:

BE IT KNOWN THAT I, HIROSHI TAMURA, a
citizen of Japan residing at Kanagawa, Japan have
invented certain new and useful improvements in

INTERNET FACSIMILE GATEWAY DEVICE

of which the following is a specification:-

TITLE OF THE INVENTION

INTERNET FACSIMILE GATEWAY DEVICE

BACKGROUND OF THE INVENTION

5 1. Field of the Invention

 The present invention relates to an Internet
facsimile gateway device that includes a function to
exchange image information with a facsimile device
through a telecommunication network and a function to
10 exchange image information through the Internet by use
of electronic mail, and a method of controlling the
Internet facsimile gateway device.

 2. Description of the Related Art

 Recently, an Internet facsimile gateway device
15 has been in practical use, wherein the Internet
facsimile gateway device includes a function to exchange
image information with a G3 facsimile device through an
analog public network and a function to exchange the
image information by use of electronic mail through the
20 Internet.

 Additionally, another type of the Internet
facsimile gateway device is in practical use, wherein
the Internet facsimile gateway device includes a
function to exchange the image information with a G4
25 facsimile device through the ISDN and a function to

009060"4749560

exchange the image information through the Internet by use of electronic mail.

A use of such Internet facsimile gateway devices makes it possible to exchange various messages
5 between a host device connected to the Internet and a G3 facsimile device connected to the analog public network or between a host device connected to the Internet and a G4 facsimile device connected to the ISDN.

The host device transmits an electronic mail
10 message requesting image-information transmission to the Internet facsimile gateway device when the host device needs to transmit image information to a G3 facsimile device that is connected to the analog public network. The Internet facsimile gateway device then manages
15 image-information transmission processes.

Accordingly, the host device as a sender cannot keep track of transmission of image information to the G3 facsimile device, and cannot easily confirm a delivery of the image information to the G3 facsimile
20 device.

SUMMARY OF THE INVENTION

Accordingly, it is a general object of the present invention to provide an Internet facsimile
25 gateway device that enables a sender of image

009060"4T49560

information to easily confirm a transmission condition
of the image information transmitted to a facsimile
device as a receiver, and a method of controlling the
Internet facsimile gateway device, in which the
5 disadvantages described above are eliminated.

The above-described object of the present
invention is achieved by an Internet facsimile gateway
device connected to a telecommunication network and the
Internet, including;

10 an image-information transmitting unit that
transmits image information included in an electronic
mail message to a facsimile device when the Internet
facsimile gateway device receives the electronic mail
message requesting image-information transmission to the
15 facsimile device;

a delivery-confirmation-mail creating unit
that creates a delivery-confirmation mail message
notifying a result of the image-information transmission
after the image-information transmission by the Internet
20 facsimile gateway device is completed, if the electronic
mail message requests the Internet facsimile gateway
device to transmit the delivery-confirmation mail
message to an original address of the electronic mail
message; and

25 a delivery-confirmation-mail transmitting unit

that transmits the delivery-confirmation mail message to the original address of the electronic mail message.

Other objects, features and advantages of the present invention will become more apparent from the following detailed description when read in conjunction with the accompanying drawings.

It should be note that, hereinafter, an electronic mail message is referred to as an email message.

10

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic diagram of a facsimile communication system that includes a facsimile gateway device according to the present invention;

15

FIG. 2 is a schematic diagram of the facsimile gateway device according to the present invention;

FIG. 3 is a schematic diagram of a facsimile communication system according to a first embodiment of the present invention;

20

FIG. 4 is a block diagram showing components of a facsimile gateway device GF in the first embodiment of the present invention;

FIG. 5 is a schematic diagram showing one form of an electronic mail message;

25

FIG. 6 is a time chart showing an image-

009060"4T495960

information transmission procedure taken by a G4
facsimile device;

FIGS. 15A, 15B and 15C are flowcharts showing
a first image-information transmission process taken by
5 the facsimile gateway device GFa in the second
embodiment of the present invention;

FIGS. 16A and 16B are schematic diagrams
showing a reception ability table and reception ability
information;

10 FIG. 17 is a schematic diagram showing one
form of the DSN delivery-confirmation mail message that
includes the reception ability information;

FIG. 18 is a schematic diagram showing one
form of the MDN delivery-confirmation mail message that
15 includes the reception ability information;

FIGS. 19A, 19B and 19C are flowcharts showing
a second image-information transmission process taken by
the facsimile gateway device GF in the first embodiment
of the present invention;

20 FIGS. 20A, 20B and 20C are flowcharts showing
a second image-information transmission process taken by
the facsimile gateway device GFa in the second
embodiment of the present invention;

FIG. 21 is a schematic diagram showing one
25 form of the DSN delivery-confirmation mail message that

009060"4495960

includes a notification "relayed";

FIG. 22 is a schematic diagram showing one form of the MDN delivery-confirmation mail message that includes a notification "dispatched";

5 FIG. 23 is a schematic diagram showing one form of the DSN delivery-confirmation mail message that includes a notification "delivered";

FIG. 24 is a schematic diagram showing one form of the MDN delivery-confirmation mail message that
10 includes a notification "displayed";

FIG. 25 is a schematic diagram showing one form of the DSN delivery-confirmation mail message that includes a notification "failed";

FIG. 26 is a schematic diagram showing one
15 form of the MDN delivery-confirmation mail message that includes a notification "failed";

FIGS. 27A, 27B and 27C are flowcharts showing a third image-information transmission process taken by the facsimile gateway device GF in the first embodiment
20 of the present invention; and

FIGS. 28A, 28B and 28C are flowcharts showing a third image-information transmission process taken by the facsimile gateway device GFa in the second embodiment of the present invention.

25

009050"449960

DESCRIPTION OF THE PREFERRED EMBODIMENTS

A description will now be given of a preferred embodiment of the present invention, with reference to the accompanying drawings.

5 FIG. 1 is a schematic diagram of a facsimile communication system that includes a facsimile gateway device according to the present invention. This facsimile communication system includes the Internet 101, an Internet facsimile gateway device 102, a data
10 terminal device 103, a telecommunication network 104 and a facsimile device 105.

 The Internet facsimile gateway device 102 is an Internet facsimile gateway device connected to the Internet 101 and the telecommunication network 104, and
15 includes a telecommunication image-information exchanging unit 111, an Internet mail-exchanging unit 112, an image-information transmitting unit 113, a delivery-confirmation-mail creating unit 114 and a delivery-confirmation-mail transmitting unit 115, as
20 shown in FIG. 2.

 The telecommunication image-information exchanging unit 111 exchanges image information with the facsimile device 105 through the connected telecommunication network 104. The Internet mail-
25 exchanging unit 112 exchanges the image information by

009060"449560

use of electronic mail through the connected Internet
101. The image-information transmitting unit 113
transmits the image information included in an email
message to the facsimile device 105 when the Internet
5 facsimile gateway device 102 receives the email message
requesting image-information transmission to the
facsimile device 105. The image-information
transmitting unit 113 also transmits image information
received from the facsimile device 105 to the data
10 terminal device 103. The delivery-confirmation-mail
creating unit 114 creates a delivery-confirmation mail
message notifying a result of the image-information
transmission after the image-information transmission by
the Internet facsimile gateway device 102 is completed,
15 if the email message requests the Internet facsimile
gateway device 102 to transmit the delivery-confirmation
mail message to an original address of the email message.
The delivery-confirmation-mail transmitting unit 115
transmits the delivery-confirmation mail message to the
20 original address of the email message.

The data terminal device 103 is a host device
connected to the Internet 101. The facsimile device 105
is connected to the telecommunication network 104. The
above described facsimile communication system makes it
25 possible to exchange image information between the data

095644-090600

terminal device 103 and the facsimile device.

In the facsimile communication system, the image information is transmitted from the data terminal device 103 through the Internet facsimile gateway device 102 to the facsimile device 105 by taking the following steps.

The data terminal device 103 creates an email message in a fixed format that includes the image information, and transmits the created email message to the Internet facsimile gateway device 102 as a first step to transmit the image information to the facsimile device 105. It should be noted that, hereinafter, the email message in the fixed format that includes the image information is referred to as a transmission request message.

At the first step, the data terminal device 103 also includes destination address information of the facsimile device 105, in this case, a telephone number of the facsimile device 105 in the transmission request message. Subsequently, the data terminal device 103 transmits the transmission request message to the Internet facsimile gateway device 102. The Internet facsimile gateway device 102 receives the email message that includes the destination address information through its Internet mail-exchanging unit 112, and then

009060"4749560

decides the received email message as the transmission request message, extracts the image information therefrom, and transmits the image information by use of its image-information transmitting unit 113 through its telecommunication image-information exchanging unit 111 to the facsimile device 105 after calling a destination address specified by the destination address information. Subsequently, the delivery-confirmation-mail creating unit 115 located in the Internet facsimile gateway device 102 creates a delivery-confirmation mail message notifying a result of the image-information transmission after an image-information transmission by the Internet facsimile gateway device 102 is completed if the received email message requests the Internet facsimile gateway device 102 to transmit the delivery-confirmation mail message to the data terminal device 103. The delivery-confirmation-mail transmitting unit 115 then transmits the delivery-confirmation mail message to the data terminal device 103.

20 The image information is transmitted from the facsimile device 105 through the Internet facsimile gateway device 102 to the data terminal device 103 by taking the following steps.

 The facsimile device 105 calls the Internet
25 facsimile gateway device 102 as a first step to transmit

When the facsimile device 105 calls the Internet facsimile gateway device 102, and the user mail address is specified as the destination address of the image information, the Internet facsimile gateway device 102 starts storing the image information received through its telecommunication image-information exchanging unit 111 from the facsimile device 105. The Internet facsimile gateway device 102 then creates an email message that includes the stored image information and the specified user mail address, and transmits the created email message by its image-information transmitting unit 113 through the Internet mail-exchanging unit 112 to a mail server that transmits the email message to the specified user mail address. Subsequently, the mail server transmits the email message received from the Internet facsimile gateway device 102 to the specified user mail address. It should be noted that, hereinafter, the email message that includes the stored image information and the specified user mail address is referred to as a delivery

email message.

The Internet facsimile gateway device 102 is provided with a function to receive the email message, and can interpret a SMTP command directly from the received email message.

FIG. 3 is a schematic diagram of a facsimile communication system according to a first embodiment of the present invention.

This facsimile communication system includes the Internet INET, a facsimile gateway device GF, a data terminal device DT, a public switched telephone network PSTN and a G3 facsimile device FF.

The facsimile gateway device GF is an Internet facsimile gateway device connected to the Internet INET and the public switched telephone network PSTN.

The data terminal device DT is a host device connected to the Internet INET. The G3 facsimile device FF is connected to the public switched telephone network PSTN that is an analog public network. The facsimile communication system makes it possible to exchange image information between the data terminal device DT and the G3 facsimile device FF. An image-information transmission process in this facsimile communication system is executed similarly as described above with FIG. 1 and FIG. 2.

FIG. 4 is a block diagram showing components of the facsimile gateway device GF in the first embodiment of the present invention.

As shown in FIG. 4, the facsimile gateway
5 device GF includes a system control unit 1, a system
memory 2, a parameter memory 3, a clock circuit 4, a
scanner 5, a plotter 6, an operation display unit 7, an
encoder/decoder unit 8, an image storage device 9, a G3
facsimile modem 10, a network control unit 11, an
10 Internet interface circuit 12, an Internet transmission
control unit 13, and an internal bus 14.

The system control unit 1 controls each unit
in the facsimile gateway device GF and executes control
processes such as a facsimile transmission control
15 process. The system memory 2 stores a control program
executed by the system control unit 1 and data necessary
for an execution of the control program, and is used as
a working area for the system control unit 1. The
parameter memory 3 stores various types of information
20 for controlling the facsimile gateway device GF. The
clock circuit 4 outputs current time information.

The scanner 5 reads a manuscript image with a
fixed resolution. The plotter 6 prints out an image
with a fixed resolution. The operation display unit 7
25 includes all types of operation keys and indicators for

5
10
15
20
25

The image storage unit 9 stores encoded image information.

The network control unit 11 includes an automatic send/receive function and connects the facsimile gateway device GF to the analog public network PSTN.

The internal bus 14 is connected to the system

25

5

10

15

25

are regulated by a RFC (Request For Comments) document published by the IETF (Internet Engineering Task Force). For example, the TCP, the IP and the SMTP are regulated respectively by a RFC 793, a RFC 793 and a RFC 821. The
5 data format of the email message is regulated by a RFC 822, a RFC 1521 and a RFC 1522 (a MIME format).

Additionally, in the embodiment of the present invention, the email message is used for exchanging facsimile image information through the Internet INET.
10 Since the facsimile image information is binary data and cannot be directly included in the email message, the facsimile image information is included in the email message by being converted to readable information (a 7
15 bits character code) by applying a fixed conversion method, for example, a BASE 64 encoding method. The above-described format of text information in the email message is called the MIME (Multi Purpose Message Extension) format.

FIG. 5 shows one form of the email message
20 used for transmitting the facsimile image information. It should be noted that an entire format of the email message is regulated by a RFC 2305 (a simple mode facsimile).

The email message shown in FIG. 5 is an email
25 message having plural parts in a multipart MIME format,

5
10

15

20

25

facsimile gateway device GF, the destination address information of the G3 facsimile device FF is set in the "To:" field of the transmission request message in the following format.

5 FAX= "International Telephone Number" @
"Domain Name"

"International Telephone Number" is an international telephone number of the G3 facsimile device FF. "Domain Name" is a domain name of the
10 facsimile gateway device GF. The above-shown format of the destination address information of the G3 facsimile device FF is regulated by the RFC 2304.

A format to place the destination address information of the G3 facsimile device FF is not limited
15 to the above-described format. For instance, the destination address information may be placed in the text part, in one of the multipart MIME, or in a "Subject:" field of the mail header.

FIG. 6 shows an image-information transmission
20 procedure taken by the G3 facsimile device FF. This transmission procedure is taken for a transmission of the image information between the G3 facsimile device FF and the facsimile gateway device GF. It should be noted that, hereinafter, the transmission procedure taken by
25 the G3 facsimile device FF is referred to as a G3

The calling end initially calls the receiving end.

signal CNG to the receiving end in order to identify the receiving end. After detecting the signal CNG, the

Signal) one after another to the calling end for notifying identification information and transmission function information of an own terminal device on the receiving end to the calling end.

The calling end, after receiving the signal
15 CSI and the signal DIS from the receiving end, decides a
transmission function to use, and sends a signal SID, a
signal SUB, a signal TSI (Transmitting Subscriber
Identification) and a signal DCS (Digital Command
Signal) one after another to the receiving end for
20 notifying a notification address, a sub address, the
identification information of the own terminal device on
the calling end and the transmission function
information to the receiving end.

25 Additionally, the calling end executes a modem
training procedure by sending out a signal TCF (Training

Check) to the receiving end. The receiving end sends a signal CFR (Confirmation to Receive) to the calling end in response to the signal TCF therefrom, and prepares for a reception of the image information.

5 In this example of the transmission procedure, the image information includes two pages of the image. The calling end sends a first page of the image information PIX 1 and then a signal MPS (Multi-Page Signal) to the receiving end. The signal MPS is sent
10 from the calling to notify the receiving end that there exists the following page to be transmitted.

 The receiving end sends a signal MCF (Message Confirmation) to the calling end if and only if the receiving end receives the first page of the image
15 information PIX 1 and a transmission result of the PIX 1 is good. The receiving end then prepares for the reception of the next page of the image information in response to the received signal MPS.

 Subsequently, the calling end sends a second
20 page of the image information PIX 2 and then a signal EOP (End of Procedure) notifying the second page is the last page of the transmission to the receiving end.

 The receiving end sends the signal MCF to the calling end if and only if the receiving end receives
25 the second page of the image information PIX 2 and the

009060"449950

transmission result of the PIX 2 is good. The receiving end does not proceed to prepare for the reception of the next page of the image information since the receiving end receives the signal EOP.

5 At the last step of the transmission procedure, the calling end sends a signal DCN to the receiving end, and then clears a line to the receiving end. The receiving end also clears the line to the calling end after receiving the signal DCN from the calling end.

10 Consequently, the transmission procedure of the image information between the calling end and the receiving end is completed.

 A description will now be given of a delivery confirmation method to confirm a delivery of the image
15 information.

 As described above, the data terminal device DT initially transmits the transmission request message to the facsimile gateway device GF when the data terminal device DT transmits the image information to
20 the G3 facsimile device FF.

 The transmission request message is transmitted following an appropriate path from the data terminal device DT through plural mail servers not shown in the figures in order, to the facsimile gateway device
25 GF as its destination address.

009060"449960

The facsimile gateway device GF, in a case that a received email message is the transmission request message from the data terminal device DT, extracts the image information included in the transmission request message, and transmits the extracted image information to its destination address, in this case, the telephone number of the G3 facsimile device FF after calling the number.

The facsimile gateway device GF notifies the data terminal device DT after the G3 facsimile device FF receives the image information so that a user of the data terminal device DT is able to know whether the image information transmitted from the data terminal device DT is received by the G3 facsimile device FF.

The above-described method to confirm the delivery of the image information is referred to as the delivery confirmation method. This delivery confirmation method to confirm the delivery of the image information or an email message is regulated by a DSN (Delivery Status Notification) and a MDN (Message Disposition Notification).

It should be noted, hereinafter, a delivery-confirmation mail message regulated by the DSN is referred to as a DSN delivery-confirmation mail message, and a delivery-confirmation mail message regulated by

009060-449960

the MDN is referred to as a MDN delivery-confirmation mail message.

According to the DSN regulated by a RFC 1891 and a RFC 1894, a SMTP client such as the data terminal
5 device DT requests a delivery confirmation to a SMTP server at a SMTP command level.

FIG. 7 shows an example of a protocol that is applied between the SMTP client and the SMTP server when a delivery confirmation request by the DSN is processed
10 between them. The facsimile gateway device GF according to the embodiment of the present invention includes a SMTP reception function equivalent to the SMTP server function, and is able to receive a SMTP command and the email message.

15 The SMTP client initially requests the SMTP server to establish a connection between them by use of a TCP port 25. The SMTP server sends a code "220" with an appropriate comment, in this case, "OK" to the SMTP client, wherein the code "220" indicates a connection
20 request from the SMTP client is accepted.

Subsequently, the SMTP client sends a host name of its own terminal device to the SMTP server by using a command "HELO" followed by an argument "host" as the host name. After receiving the command HELO from
25 the SMTP client, the SMTP server sends a code "250" and

an appropriate option as a comment, for example, a server host name, to the SMTP client, wherein the code "250" indicates a command from the SMTP client, in this case, the command HELO is accepted by the SMTP server.

5 The SMTP client, after receiving the code "250", sends a command line "MAIL FROM: aaa@bb.cc.dd" notifying a sender's mail address to the SMTP server. The sender's mail address "aaa@bb.cc.dd" is set as the argument of a command "MAIL FROM:".

10 Subsequently, if the SMTP server receives the command line "MAIL FROM: aaa@bb.cc.dd" from the SMTP client, the SMTP server obtains the sender's mail address "aaa@bb.cc.dd" from the received command line, and checks a format of the sender's mail address. If
15 the sender's mail address includes a character "@", the sender's mail address usually does not exist in the SMTP server's domain, and the SMTP server checks whether an address format of the sender's mail address is correct. If the sender's mail address does not include a
20 character "@", the sender's mail address must exist in the SMTP server's domain, and the SMTP server checks whether the sender's mail address is registered to the SMTP server's domain. The SMTP server may check different elements such as an alias of the sender's mail
25 address depending on a set up of the SMTP server.

009060"4T49960

If the SMTP server determines that the format of the sender's mail address is correct by taking the above-described steps, the SMTP server sends the code "250" and the comment "OK" that indicates the format of the sender's mail address is correct, to the SMTP client.

The SMTP client, after receiving the code "250" from the SMTP server, sends a command line "RCPT TO: eee@ff.gg.hh NOTIFY='XX'" to the SMTP server for notifying the destination mail address. The destination mail "eee@ff.gg.hh" is set as the argument of a command "RCPT TO:".

Additionally, a DSN command "NOTIFY='XX'" indicates that the SMTP client requests a delivery-confirmation mail message that corresponds to a value "XX" from the SMTP server. A value "SUCCESS" is set to the value "XX" if the SMTP client requests the delivery-confirmation mail message that notifies a successful mail delivery when the email message is delivered correctly to its destination address. A value "FAILURE" is set to the value "XX" if the SMTP client requests the delivery-confirmation mail message that notifies a mail delivery failure when the email message is not delivered correctly to its destination address. A value "SUCCESS, FAILURE" is set to the value "XX" if the SMTP client requests both the delivery-confirmation mail message

that notifies a mail delivery failure and the delivery-confirmation mail message that notifies a successful mail delivery.

5 Additionally, a DSN delivery-confirmation mail message is transmitted to a mail address that is specified by a command "MAIL FROM:".

 When the SMTP server receives the command line "RCPT TO: eee@ff.gg.hh NOTIFY='XX'" from the SMTP client, the SMTP server obtains the destination mail address
10 "eee@ff.gg.hh" from the received command line, and checks a format of the destination mail address similarly as described above.

 If it is ascertained by the SMTP server that the format of the destination mail address is correct,
15 the SMTP server sends the code "250" and the comment "OK" to the SMTP client.

 After connecting to the SMTP server and then checking the sender's mail address and the destination mail address as described above, the SMTP client sends a
20 command DATA to the SMTP server for proceeding to a data phase. The SMTP server sends a code "345" indicating the command DATA is accepted by the SMTP server and the comment "OK" to the SMTP client after receiving the command DATA from the SMTP client.

25 Subsequently, the SMTP client sends a mail

009060"4F495950

header and text information of the email message in order, to the SMTP server after receiving the code "345" therefrom. After sending the mail header and the text information of the email message, the SMTP client then
5 sends a finishing code "." to the SMTP server.

When the SMTP server receives the finishing code "." from the SMTP client, the SMTP server checks whether it has received the mail header and the text information of the email message correctly. If the SMTP
10 server receives the mail header and the text information of the email message correctly from the SMTP client, it sends the code "250" and the comment "OK" to the SMTP client.

Subsequently, the SMTP client sends a command
15 QUIT to the SMTP server for notifying the end of the email message transmission. The SMTP server, after receiving the command QUIT from the SMTP client, starts transmitting the email message to the other SMTP client as the destination mail address, and sends a code "221"
20 and the comment "OK" to the SMTP client.

After receiving the code "221" from the SMTP server, the SMTP client requests the SMTP server to disconnect the line between the SMTP server and the SMTP client.

25 The SMTP client transmits the email message to

the SMTP server by taking the above-described steps.

Since the facsimile gateway device GF includes the SMTP reception function as described above, the device GF is able to receive SMTP commands from the data terminal device DT. Accordingly, the facsimile gateway device GF receives the command line "RCPT TO: eee@ff.gg.hh NOTIFY='XX'" from the data terminal device DT, and can determine whether the device DT requests the device GF to transmit the DSN delivery-confirmation mail message to the device DT, wherein the delivery-confirmation mail message corresponds to the transmission request message transmitted from the device DT to the device GF.

When receiving the DSN command line "RCPT TO: eee@ff.gg.hh NOTIFY='XX'" with the transmission request message from the data terminal device DT, the facsimile gateway device GF ascertains that the delivery confirmation for the received transmission request message is requested, and transmits the image information included therein to the specified destination address of the G3 facsimile device FF. The facsimile gateway device GF then creates the delivery-confirmation mail message that indicates the result of image-information transmission, and transmits the created delivery-confirmation mail message to the mail

Additionally, the delivery-confirmation mail message is created according to the value "XX" in the "NOTIFY='XX'". If the value "XX" is set to either "SUCCESS" or "SUCCESS, FAILURE", the facsimile gateway device GF creates the delivery-confirmation mail message as shown in FIG. 8 that indicates the success of the image-information transmission and transmits to the mail address notified by the command "MAIL FROM:" when the G3 facsimile device FF receives all the pages of the image information correctly.

The success of the image-information transmission is indicated by a sentence "Action: delivered" in the second MIME part of the delivery-
15 confirmation mail message shown in FIG. 8.

In FIG. 8, a total number of delivered facsimile image information is notified in an extension field "X-Transmitted-NumberOfPage-To-Fax:" of the second MIME part of the delivery-confirmation mail message. In this case, a value of the extension field "X-Transmitted-NumberOfPage-To-Fax:" is set to "5" showing that the total number of the delivered facsimile image information is five.

25 Additionally, a communication charge of the
image-information transmission (a telephone charge) is

notified in an extension field "X-Charge-Information-To-Fax:" of the second MIME part of the delivery-confirmation mail message. In this case, a value of the extension field "X-Charge-Information-To-Fax:" is set to
5 "¥100" showing that the communication charge is 100 yen.

The communication charge is calculated, for instance, by finding the time taken for the image-information transmission, and by calculating using a widely known communication charge calculating method
10 based on the found time and the communication charge for each time unit between a calling end and a receiving end. Otherwise, the communication charge is calculated by multiplying the time taken for the image-information transmission and the communication charge for
15 transmitting a page in a case that the communication charge for transmitting a page is predetermined.

If the value "XX" is set to either "FAILURE" or "SUCCESS, FAILURE", the facsimile gateway device GF creates the delivery-confirmation mail message as shown
20 in FIG. 9 that indicates the failure of the image-information transmission and transmits to the mail address notified by the command "MAIL FROM:" when the G3 facsimile device FF fails to receive a page or more included in the image information.

25 The failure of the image-information

5

10

15

20

25

gateway device GF transmits the image information included in the received transmission request message to the destination address of the G3 facsimile device FF. Subsequently, the facsimile gateway device GF creates
5 the delivery-confirmation mail message showing a result of the image-information transmission by a method regulated by the MDN, and transmits the created delivery-confirmation mail message to the mail address notified by the "Disposition-Notification-To:" field.

10 FIGS. 10A and 10B show one form of the MDN delivery-confirmation mail message that indicates the success of the image-information transmission. A sentence "Disposition: manual-action/MDN-sent-manually; displayed (or processed)" in the second MIME part of the
15 delivery-confirmation mail message shows that the result of the image-information transmission is normal, in other words, the G3 facsimile device FF receives all the pages of the transmitted image information.

Additionally, a total number of delivered
20 facsimile image information is notified in the extension field "X-Transmitted-NumberOfPage-To-Fax:" of the second MIME part of the delivery-confirmation mail message. A communication charge of the image-information transmission (a telephone charge) is notified in the
25 extension field "X-Charge-Information-To-Fax:" of the

009060-449960

second MIME part of the delivery-confirmation mail message.

The communication charge can be calculated by applying the same method as described above for the DSN
5 mails.

If the G3 facsimile device FF cannot receive one or more pages, the facsimile gateway device GF creates the delivery-confirmation mail message that indicates the failure of the image-information
10 transmission. In such case, a sentence "Disposition: manual-action/MDN-sent-manually; failed" is placed in the second MIME part of the delivery-confirmation mail message. Additionally, the extension fields "X-Transmitted-NumberOfPage-To-Fax:" and "X-Charge-
15 Information-To-Fax:" are not placed in the second MIME part of the delivery-confirmation mail message.

As described above, in this embodiment of the present invention, when transmitting the image information through the facsimile gateway device GF to
20 the G3 facsimile device FF by use of the transmission request message, a user of the data terminal device DT can receive the delivery-confirmation mail message notifying the result of the facsimile image-information transmission so as to clearly know the result of the
25 facsimile image-information transmission, which is very

009060"449990

convenient.

FIGS. 11A, 11B and 11C are flowcharts showing
a first image-information transmission process taken by
the facsimile gateway device GF in the first embodiment
5 of the present invention.

The facsimile gateway device GF initially
detects a reception of a call from the PSTN or an email
message (NO at a step S101 and NO at a step S102).

In a case that the facsimile gateway device GF
10 receives the call from the PSTN at the step S101, the
device GF proceeds to a step S103. At the step S103,
the device GF executes a fixed call reception process,
receives image information by executing the G3 facsimile
transmission procedure between the device GF and the G3
15 facsimile device FF, and stores the received image
information therein.

The device GF checks whether a destination
address of the image information is specified in order
to transmit the received image information to a user of
20 the data terminal device DT or the G3 facsimile device
FF at a step S104. If it is ascertained at the step
S104 that the destination address of the image
information is specified, the device GF proceeds to a
step S105 and executes a fixed transmission process that
25 transmits the image information to the specified

destination address. The device GF then terminates the image-information transmission process.

If it is ascertained at the step S104 that the destination address of the image information is not
5 specified, the device GF prints out the stored image information at a step S106, and then terminates the image-information transmission process.

If the device GF receives an email message at the step S102, it checks whether the destination address
10 of the image information is specified in the email message at a step S108. If it is ascertained at the step S108 that the destination address is not specified, the device GF extracts the image information from text information of the received email message, and prints
15 out the extracted image information at a step S109. The device GF then terminates the image-information transmission process.

If it is ascertained at the step S108 that the destination address of the image information is
20 specified, the email message received from the data terminal device DT by the device GF is a transmission request message. Accordingly, at a step S110, the device GF obtains a telephone number of the G3 facsimile device FF as the destination address of the image
25 information from the received transmission request

009060"4F49560

message. The device GF then creates the image information from the text information of the received transmission request message at a step S111. Subsequently, at a step S112, the device GF calls the telephone number obtained at the step S110. At a step S113, the device GF executes the fixed G3 facsimile transmission procedure and transmits the image information created at the step S111 to the destination address. The device GF then stores a result of the image-information transmission at a step S114. For instance, the device GF stores a result that indicates a successful transmission if the device GF receives the signal MCF for each page transmitted, and stores a result that indicates a failed transmission if the device GF does not receive the signal MCF for any page transmitted.

Additionally, when receiving the transmission request message, the device GF checks whether the transmission request message requests the delivery confirmation by the DSN at a step S115. If it is ascertained that the delivery confirmation by the DSN is requested at the step S115, the device GF checks whether the image-information transmission to the G3 facsimile device FF is completed without any errors at a step S116.

If it is ascertained at the step S116 that the

image transmission is successfully completed, the device GF proceeds to a step S117, and checks whether the value of "XX" of "NOTIFY='XX'" in the transmission request message requesting the delivery confirmation by the DSN
5 is "SUCCESS" or "SUCCESS, FAILURE".

If the value of the "XX" is "SUCCESS" or "SUCCESS, FAILURE" indicating that a confirmation of a successful delivery is requested, the device GF creates a DSN delivery-confirmation mail message that indicates
10 the success of the transmission at a step S118, transmits the created DSN delivery-confirmation mail message to a mail address notified in the "MAIL FROM:" field at a step S119, and terminates the image-information transmission process. This DSN delivery-
15 confirmation mail message includes the above-described extension field "X-Transmitted-NumberOfPage-To-Fax:" showing the total number of pages transmitted and the extension field "X-Charge-Information-To-Fax:" showing the communication charge for the transmission.

20 If the value of the "XX" is found to be "FAILURE" at the step S117, the device GF does not create the DSN delivery-confirmation mail message, and terminates the image-information transmission process.

If it is ascertained at the step S116 that the
25 image transmission is failed, the device GF proceeds to

009060"449960

5 If the value of the "XX" is "FAILURE" or
"SUCCESS, FAILURE" indicating that a confirmation of a
failed delivery is requested, the device GF creates the
DSN delivery-confirmation mail message that indicates
the failure of the transmission at a step S122,
10 transmits the created DSN delivery-confirmation mail
message to the mail address notified in the "MAIL FROM:"
field at a step S123, and terminates the image-
information transmission process.

If it is ascertained that the delivery confirmation by the DSN is not requested at the step S115, the device GF proceeds to a step S125, and checks whether the "Disposition-Notification-To:" field is included in the mail header of the received transmission request message. If it is ascertained at the step S125 that the "Disposition-Notification-To:" field is not included in the received transmission request message,

the device GF determines that transmission request message does not request for the delivery confirmation by the MDN, and terminates the image-information transmission process.

- 5 If it is ascertained at the step S125 that the "Disposition-Notification-To:" field is included in the received transmission request message, the device GF creates a MDN delivery-confirmation mail message as described above that shows a result of the image-
- 10 information transmission at a step S126, and transmits the created MDN delivery-confirmation mail message to a mail address specified in the "Disposition-Notification-To:" field at a step S127. If the transmitted MDN delivery-confirmation mail message indicates a
- 15 successful transmission of the image information, the above-described extension field "X-Transmitted-NumberOfPage-To-Fax:" showing the total number of pages transmitted and the extension field "X-Charge-
- 20 Information-To-Fax:" showing the communication charge for the transmission are included therein.

FIG. 12 is a schematic diagram of the facsimile communication system according to a second embodiment of the present invention.

- The facsimile communication system shown in
- 25 FIG. 12 includes mainly a facsimile gateway device GFa,

a data terminal device DT and a G4 facsimile device FFa. The facsimile gateway device GFa is an Internet facsimile gateway device that has accesses to the Internet and the ISDN. The data terminal device DT is
5 connected to the Internet. The G4 facsimile device FFa is connected to the ISDN. The facsimile communication system makes it possible to exchange image information between the data terminal device DT and the G4 facsimile device FFa.

10 At a first step of transmitting image information to the G4 facsimile device FFa, the data terminal device DT creates a transmission request message that includes the image information in text information thereof, and transmits the created
15 transmission request message to the facsimile gateway device GFa.

 At the first step, the data terminal device DT also includes destination address information of the G4 facsimile device FFa, in this case, a telephone number
20 of the G4 facsimile device FFa in the transmission request message. Subsequently, the data terminal device DT transmits the transmission request message to the facsimile gateway device GFa. The facsimile gateway device GFa then ascertains a received email message that
25 includes the destination address information as the

009060"449960

transmission request message, extracts the image
information therefrom, and transmits the image
information to the G4 facsimile device FFa by calling a
destination address specified by the destination address
5 information.

As described above, the image information is
transmitted from the G4 facsimile device FFa through the
facsimile gateway device GFa to the data terminal device
DT.

10 At a first step of transmitting the image
information from the G4 facsimile device FFa to the data
terminal device DT, the G4 facsimile device FFa calls
the facsimile gateway device GFa. Subsequently, the G4
facsimile device FFa specifies a user mail address as
15 the destination address of the image information, and
transmits the image information to the facsimile gateway
device GFa.

When the G4 facsimile device FFa calls the
facsimile gateway device GFa and the mail address is
20 specified as the destination address of the image
information, the facsimile gateway device GFa stores the
image information thereafter. The facsimile gateway
device GFa then creates a delivery email message that
includes the stored image information and the specified
25 mail address, and transmits the created delivery email

009060"4749960

message following a transmission path to a mail server that is appropriate to the specified mail address.

Subsequently, the mail server transmits the delivery email message received from the facsimile gateway device GFa to the specified mail address. As described above, the image information is transmitted from the G4 facsimile device FFa through the facsimile gateway device GFa to the data terminal device DT.

The facsimile gateway device GFa is provided with a function to receive the email message, and can interpret a SMTP command directly from the received email message.

FIG. 13 is a block diagram showing components of the facsimile gateway device GFa in the second embodiment of the present invention.

As shown in FIG. 13, the facsimile gateway device GFa includes a system control unit 21, a system memory 22, a parameter memory 23, a clock circuit 24, a scanner 25, a plotter 26, an operation display unit 27, an encoder/decoder unit 28, an image storage device 29, an ISDN interface circuit 30, a D-channel transmission control unit 31, B-channel transmission control units 32 and 33, an Internet interface unit 34, an Internet transmission control unit 35, and a system bus 36.

The system control unit 21 controls each unit

in the facsimile gateway device GFa and executes control processes such as a facsimile transmission control process. The system memory 22 stores a control program executed by the system control unit 21 and data

5 necessary for an execution of the control program, and is used as a working area for the system control unit 21. The parameter memory 23 stores various types of information peculiar to the facsimile gateway device GFa. The clock circuit 24 outputs current time information.

10 The scanner 25 reads a manuscript image with a fixed resolution. The plotter 26 prints out an image with a fixed resolution. The operation display unit 27 includes all types of operation keys and indicators for operating the facsimile gateway device GFa.

15 The encoder/decoder unit 28 encodes and compresses an image signal, and also decodes and expands an encoded image signal back to an original image signal. The image storage unit 29 stores encoded image information.

20 The ISDN interface circuit 30 that connects the facsimile gateway device GFa to the ISDN has a function to process a layer 1 signal and a function to combine or separate a D-channel (a signal channel) signal and a B-channel (a information channel) signal.

25 The D-channel transmission control unit 31 executes a

009060"449960

5 the ISDN.

```

10  fixed protocol suites for exchanging data with other
    data terminal devices through the Internet INET. For
    instance, the Internet transmission control unit 35
    executes Send/receive processes of the email message

```

unit 21, the system memory 22, the parameter memory 23, the clock circuit 24, the scanner 25, the plotter 26, the operation display unit 27, the encoder/decoder unit 28, the image storage device 29, the D-channel transmission control unit 31, the B-channel transmission control units 32 and 33, and the Internet transmission control unit 35 together. A data exchange among each unit in the facsimile gateway device GFa is processed mainly through the system bus 36.

25 transmission procedure taken by the G4 facsimile device

FFa. This transmission procedure is taken for a transmission of the image information between the G4 facsimile device FFa and the facsimile gateway device GFa.

5 The G4 facsimile device FFa as a calling end sends a call establishment message SETUP to the ISDN with its destination address specified to an address of another G4 facsimile device on a receiving end, and requests a call establishment between the calling end
10 and the receiving end. Receiving the message SETUP from the calling end, the ISDN sends a call establishment acceptance message CALL_PROC that notifies a condition of the call establishment to the calling end, and calls the receiving end by sending the call establishment
15 message SETUP to a specified destination address of the receiving end.

 After receiving the call establishment message SETUP, the receiving end sends a message CONN accepting the call establishment request by the calling end to the
20 ISDN. The ISDN sends the message CONN to the calling end, and a message CONN_ACK to the receiving end acknowledging the reception of the message CONN. By taking the above-described steps, the B-channel (the information channel) is established for transmitting
25 data between the calling end and the receiving end.

005050"445550

At a first step in the data transmission procedure, the calling end sends a command SABM requesting an establishment of a link layer to the receiving end, and then the receiving end sends a response UA to the calling end. Consequently, the link layer is established between the calling end and the receiving end.

The calling end then sends a signal SQ for establishing a network layer, and then the receiving end sends a signal SF to the for accepting the signal SQ. Subsequently, the calling end sends a signal CR to the receiving end for a call request. The receiving end then sends a signal CA to the calling end accepting the call from the calling end. Accordingly, a network layer is established between the calling end and the receiving end.

Additionally, the calling end sends a signal TCR to the receiving end, and then the receiving end sends a signal TCA as a response to the signal TCR to the calling end. Accordingly, a transport layer is established between the calling end and the receiving end.

At the next step, the calling end sends a

session starting command CSS to the receiving end, and
then the receiving end sends a response RSSP
acknowledging a start of a session to the calling end.
Accordingly, a session layer connection is established
5 between the calling end and the receiving end.

The calling end sends a document function list
command CDCL to the receiving end for negotiating a
transmission function to be used. Subsequently, the
receiving end sends a response RDCLP acknowledging a
10 document function list to the calling end. Accordingly,
a reception ability of the receiving end is adjusted.

After a preparation for image-information
transmission is completed as described above, the
calling end sends the image information included in a
15 single document to the receiving end by sending a
document starting command CDS and then plural document
user information commands CDUI. The command CDS is
provided with a variety of information used for managing
document information such as a document reference number
20 used for distinguishing documents to be transmitted.
When a transmission of the document is completed, the
calling end sends a signal CDE notifying the image
information is successfully transmitted to the receiving
end.

25 The receiving end receives the signal CDE, and

sends a response RDEP indicating the reception of the image information is successful to the calling end.

In a case that the document wherein the image information is attached includes plural pages, the
5 calling end sends a document page boundary command CDPB to the receiving end indicating that a transmission of a page is completed at each time the transmission of a page except the last one of the image information is completed. The receiving end sends a response RDPBP to
10 the calling end acknowledging a successful page reception after each successful transmission of the page.

After completing the transmission of the image information attached to the document as described above, the calling end sends a session finishing command CSE to
15 the receiving. In response to the signal CSE, the receiving end sends a response RSEP to the calling end acknowledging the end of the session, and releases the session layer connection that is established between the calling end and the receiving end.

20 Additionally, the calling end sends a network layer signal CQ, and the receiving end sends a signal CF correspondingly to the calling end. Accordingly, the network layer is released. Additionally, the calling end sends a link layer command DISC to the receiving end,
25 and the receiving end sends the response UA to the

calling end. Accordingly, the link layer is released.

After the links on the B-channel are released as described above, the calling end sends a disconnecting message DISC to the ISDN requesting a
5 release of the B-channel (the information channel). The ISDN sends a releasing message REL to the calling end notifying the release of the information channel, and the disconnecting message DISC to the receiving end requesting the release of the information channel.
10 Subsequently, the receiving end sends the releasing message REL to the ISDN notifying the release of the information channel.

The calling end sends a release-completing message REL_COMP indicating a completion of releasing
15 the information channel to the ISDN. Accordingly, the information channel between the calling end and the ISDN is released. Additionally, the ISDN sends the release-completing message REL_COMP to the receiving end. Accordingly, the information channel between the ISDN
20 and the receiving end is released. The information channel established between the calling end and the receiving end is then completely released.

As described above, the transmission procedure of the image information taken by the G4 facsimile
25 device FFa includes the steps of establishing the

00960449550

information channel between the calling end and the receiving end, transmitting data between them, and releasing the established information channel after the data transmission is completed.

5 FIGS. 15A, 15B and 15C are flowcharts showing a first image-information transmission process taken by the facsimile gateway device GFa in the second embodiment of the present invention.

10 The facsimile gateway device GFa initially detects a reception of a call from the ISDN or an email message (NO at a step S301 and NO at a step S302).

15 In a case that the facsimile gateway device GFa receives the call from the ISDN at the step S301, the device GFa proceeds to a step S303. At the step S303, the device GFa executes a fixed call reception process, receives image information by executing the G4 facsimile transmission procedure between the device GFa and the G4 facsimile device FFa, and stores the received image information therein.

20 The device GFa checks whether a destination address of the image information is specified in order to transmit the received image information to a user of the data terminal device DT or the G4 facsimile device FFa at a step S304. If it is ascertained at the step
25 S304 that the destination address of the image

information is specified, the device GFa proceeds to a step S305 and executes a fixed transmission process that transmits the image information to the specified destination address. The device GFa then terminates the
5 image-information transmission process.

If it is ascertained at the step S304 that the destination address of the image information is not specified, the device GFa prints out the stored image information at a step S306, and then terminates the
10 image-information transmission process.

If the device GFa receives an email message at the step S302, it checks whether the destination address is specified in the email message at a step S308. If it is ascertained at the step S308 that the destination
15 address is not specified, the device GFa extracts the image information from text information of the received email message, and prints out the extracted image information at a step S309. The device GFa then terminates the image-information transmission process.

20 If it is ascertained at the step S308 that the destination address of the image information is specified, the email message received from the data terminal device DT by the device GFa is a transmission request message. Accordingly, at a step S310, the
25 device GFa obtains a telephone number of the G4

005060"4T495950

facsimile device FFa as the destination address of the image information from the received transmission request message. The device GFa then creates the image information from the text information of the received transmission request message at a step S311. Subsequently, at a step S312, the device GFa calls the telephone number obtained at the step S310. At a step S313, the device GFa executes the fixed G4 facsimile transmission procedure and transmits the image information created at the step S311 to the destination address. The device GFa then stores a result of the image-information transmission at a step S314. For instance, the device GFa stores a result that indicates a successful transmission if the device GFa receives the signal RDPBP or the signal RDEP for each page transmitted, and stores a result that indicates a failed transmission if the device GFa does not receive the signal RDPBP or the signal RDEP for any page transmitted.

Additionally, when receiving the transmission request message, the device GFa checks whether the transmission request message requests the delivery confirmation by the DSN at a step S315. If it is ascertained that the delivery confirmation by the DSN is requested, the device GFa also checks whether the image-information transmission to the G4 facsimile device FFa

is completed without any errors at a step S316.

If it is ascertained at the step S316 that the image transmission is successfully completed, the device GFa proceeds to a step S317, and checks whether the
5 value of "XX" of "NOTIFY='XX'" in the transmission request message requesting the delivery confirmation by the DSN is "SUCCESS" or "SUCCESS, FAILURE".

If the value of the "XX" is "SUCCESS" or "SUCCESS, FAILURE" indicating that a confirmation of a
10 successful delivery is requested, the device GFa creates a DSN delivery-confirmation mail message that indicates the success of the transmission at a step S318, transmits the created DSN delivery-confirmation mail message to a mail address notified in the "MAIL FROM:"
15 field at a step S319, and terminates the image-information transmission process. This DSN delivery-confirmation mail message includes the above-described extension field "X-Transmitted-NumberOfPage-To-Fax:" showing the total number of pages transmitted and the
20 extension field "X-Charge-Information-To-Fax:" showing the communication charge for the transmission. In this case, the ISDN notifies the telephone charge to the device GFa so that the telephone charge notified by the ISDN can be used as the communication charge for the
25 transmission.

009060"449960

5 If it is ascertained at the step S316 that the
image transmission is failed, the device GFa proceeds to
a step S321, and checks whether the value of "XX" of
"NOTIFY='XX'" in the transmission request message
requesting the delivery confirmation by the DSN is
10 "FAILURE" or "SUCCESS, FAILURE".

If the value of the "XX" is "FAILURE" or "SUCCESS, FAILURE" indicating that a confirmation of a failed delivery is requested, the device GFa creates the DSN delivery-confirmation mail message that indicates the failure of the transmission at a step S322, transmits the created DSN delivery-confirmation mail message to the mail address notified in the "MAIL FROM:" field at a step S323, and terminates the image-information transmission process.

20 If the value of the "XX" is found to be
"SUCCESS" at the step S321, the device GFa does not
creates the DSN delivery-confirmation mail message, and
terminates the image-information transmission process.

If it is ascertained that the delivery

25 confirmation by the DSN is not requested at the step

S315, the device GFa proceeds to a step S325, and checks whether the "Disposition-Notification-To:" field is included in the mail header of the received transmission request message. If it is ascertained at the step S325
5 that the "Disposition-Notification-To:" field is not included in the received transmission request message, the device GFa determines that transmission request message does not request for the delivery confirmation by the MDN, and terminates the image-information
10 transmission process.

If it is ascertained at the step S325 that the "Disposition-Notification-To:" field is included in the received transmission request message, the device GFa creates a MDN delivery-confirmation mail message as
15 described above that shows a result of the image-information transmission at a step S326, and transmits the created MDN delivery-confirmation mail message to a mail address specified in the "Disposition-Notification-To:" field at a step S327. If the transmitted MDN
20 delivery-confirmation mail message indicates a successful transmission of the image information, the above-described extension field "X-Transmitted-NumberOfPage-To-Fax:" showing the total number of pages transmitted and the extension field "X-Charge-
25 Information-To-Fax:" showing the communication charge

for the transmission are included therein.

Additionally, any information useful to a user may be included in the delivery-confirmation mail message. For instance, a communication ending time is notified by the ISDN, and is included in a "Last-Attempt-Date:" field of the second MIME part of the delivery-confirmation mail message shown in FIG. 8.

As described above, in this embodiment of the present invention, when transmitting the image information through the facsimile gateway device GFa to the G4 facsimile device FFa by use of the transmission request message, a user of the data terminal device DT can receive the delivery-confirmation mail message notifying the result of the facsimile image-information transmission so as to clearly know the result of the facsimile image-information transmission, which is very convenient.

When transmitting image information to the G3 facsimile device FF, the facsimile gateway device GF is notified by the device FF reception abilities of the device FF including paper sizes, resolutions and encoding methods of image data that are receivable by the device FF from the facsimile gateway device GF as well as types of modems, modem speeds, optional transmission functions that are usable by the device FF.

Accordingly, it is expected to transmit image information efficiently by storing the reception ability of the G3 facsimile device FF in the facsimile gateway device GF for each destination address, in a case that

5 the device GF transmits the image information to a specific destination address for the first time, and then refers to the stored reception ability when transmitting the image information to the destination address from the second time.

10 Additionally, a user can transmit image information with a high image quality by referring to the reception ability of the G3 facsimile device FF such as applicable paper sizes and acceptable resolutions when creating the image information.

15 In order to achieve the above-described efficient image-information transmission, a reception ability table shown in FIG. 16A is created in the facsimile gateway device GF storing reception ability information for each destination address, each G3

20 facsimile device FF, whereto the image information is transmitted. The reception ability information for a destination address includes a telephone number of the G3 facsimile device FF and elements of the reception ability of the G3 facsimile device FF as shown in FIG.

25 16B.

009060-4749960

As shown in FIG. 17, the reception ability information of the G3 facsimile device FF at a receiving end is recorded in a single part of a DSN delivery-confirmation mail message so that a user of the data terminal device DT at a calling end is notified by the DSN delivery-confirmation mail message about the reception ability information of the G3 facsimile device FF.

In the above-described case, an "Action: dispatched" placed in the second part of the DSN delivery-confirmation mail message indicates that the image-information transmission to a destination address "Final-Recipient: RFC822; Fax=+81-3-9876-5432@jupiter" is succeeded. The reception ability information of the destination address is shown in a "Media-Accept-Features:" field located in the second part of the DSN delivery-confirmation mail message.

In the shown "Media-Accept-Features:" field, the acceptable resolution is 200x100dpi/200x200dpi, the acceptable encoding method is MH/MR/MMR, and the paper size is A4/B4.

Using extension fields shows other abilities of the facsimile device FF.

For instance, a line "X-C3Fax-JM: V. 34, V. 17, V. 29, V. 27ter" shows a modem support ability of the

facsimile device FF when using an advice V. 8/V. 34 modem. A V. 8 modem procedure starts when a receiving end, the facsimile device FF, sends the signal CED to a calling end, the facsimile gateway device GF.

5 Subsequently, a modem function to be used is notified to the calling end by a signal JM, and then an advice V. 34 modem training procedure is executed. Consequently, the modem speed applied between the calling end and the receiving end is determined.

10 Additionally, a line "X-G3Fax-INTERNET: T.37 simple mode" shows an ability of the receiving end to connect to the Internet. This ability information is obtained from a bit 1 in the signal DIS that received from the receiving end.

15 Additionally, a line "X-G3Fax-CSA: kilo@medaka.pole.co.jp" shows a destination mail address. This ability information is also obtained from a bit 1 in the signal DIS received from the receiving end. The data terminal device DT can transmit image information
20 to the G3 facsimile device FF by sending the email message including the image information to the destination mail address. Types and contents of the above-described extension fields may be altered to match the needs for the image-information transmission.

25 The reception ability of the G3 facsimile

009060"47495950

device FF may be notified to a user of the data terminal device DT by use of a MDN delivery-confirmation mail message as well as use of a DSN delivery-confirmation mail message. FIG. 18 shows the MDN delivery-

5 confirmation mail message including the reception ability of the G3 facsimile device FF.

In the MDN delivery-confirmation mail message, a line "Disposition: manual-action/MDN-sent-manually; dispatched" indicates that the image information is
10 transmitted successfully to a destination address "Final-Recipient: RFC822; Fax=+81-3-9876-5432@jupiter". Additionally, the reception ability of the destination address, the G3 facsimile device FF may be recorded similarly to the above-described "Media-Accept-
15 Features:" field in the DSN delivery-confirmation mail message. Additionally, extension fields in the MDN delivery-confirmation mail message are same as those of the DSN delivery-confirmation mail message.

FIGS. 19A, 19B and 19C are flowcharts showing
20 a second image-information transmission process taken by the facsimile gateway device GF in the first embodiment of the present invention, wherein the reception ability of the G3 facsimile device is notified to the data terminal device DT by use of the delivery-confirmation
25 mail message.

005060"47495950

In a case that the facsimile gateway device GF receives the call from the PSTN at the step S401, the device GF proceeds to a step S403. At the step S403, the device GF executes a fixed call reception process, receives image information by executing the G3 facsimile transmission procedure between the device GF and the G3 facsimile device FF, and stores the received image information therein.

If it is ascertained at the step S404 that the destination address of the image information is not specified, the device GF prints out the stored image

information at a step S406, and then terminates the image-information transmission process.

If the device GF receives an email message at the step S402, it checks whether the destination address of the image information is specified in the email message at a step S408. If it is ascertained at the step S408 that the destination address is not specified, the device GF extracts the image information from text information of the received email message, prints out the extracted image information at a step S409, and then terminates the image-information transmission process.

If it is ascertained at the step S408 that the destination address of the image information is specified, the email message received mail from the data terminal device DT by the device GF is a transmission request. Accordingly, at a step S410, the device GF obtains a telephone number of the G3 facsimile device FF as the destination address of the image information from the received transmission request message. The device GF then creates the image information from the text information of the received transmission request message at a step S411. Subsequently, at a step S412, the device GF calls the telephone number obtained at the step S410. At a step S413, the device GF executes the fixed G3 facsimile transmission procedure and transmits

005050" 4495950

5

10

20

25

5

10

15

20

25

"FAILURE" or "SUCCESS, FAILURE".

005050" 4455550

If the value of the "XX" is "FAILURE" or "SUCCESS, FAILURE" indicating that a confirmation of a failed delivery is requested, the device GF creates the

5 DSN delivery-confirmation mail message that indicates the failed transmission at a step S423, transmits the created DSN delivery-confirmation mail message to the mail address notified in the "MAIL FROM:" field at a step S424, and terminates the image-information

10 transmission process. It should be noted that the DSN delivery-confirmation mail message that indicates the failed transmission may include information about the reception ability of the G3 facsimile device FF.

If the value of the "XX" is found to be

15 "SUCCESS" at the step S422, the device GF does not create the DSN delivery-confirmation mail message, and terminates the image-information transmission process.

If it is ascertained that the delivery confirmation by the DSN is not requested at the step

20 S417, the device GF proceeds to a step S425, and checks whether the "Disposition-Notification-To:" field is included in the mail header of the received transmission request message. If it is ascertained at the step S425 that the "Disposition-Notification-To:" field is not

25 included in the received transmission request message,

5 If it is ascertained at the step S425 that the
"Disposition-Notification-To:" field is included in the
received transmission request message, the device GF
creates a MDN delivery-confirmation mail message that
shows a result of the image-information transmission and
10 includes the information about the reception ability of
the G3 facsimile device FF at a step S426. The device
GF then transmits the created MDN delivery-confirmation
mail message to a mail address specified in the
"Disposition-Notification-To:" field at a step S427.

In this case, the facsimile gateway device GFa and the G4 facsimile device FFa exchanges the document function list command CDCL and the response RDCLP acknowledging a document function list twice in the G4 facsimile transmission procedure.

The facsimile gateway device GFa obtains the reception ability of the G4 facsimile device FFa for the first time exchanging the command CDCL and the response RDCLP in the G4 facsimile transmission procedure. The reception ability of the G4 facsimile device FFa is then adjusted by exchanging the command CDCL and the response RDCLP between the facsimile gateway device GFa and the G4 facsimile device FFa for the second time in the same G4 facsimile transmission procedure.

FIGS. 20A, 20B and 20C are flowcharts showing a second image-information transmission process taken by the facsimile gateway device GFa in the second embodiment of the present invention, by use of the delivery-confirmation mail message that includes the reception ability.

The facsimile gateway device GFa initially detects a reception of a call from the ISDN or an email message (NO at a step S501 and NO at a step S502).

In a case that the facsimile gateway device GFa receives the call from the ISDN at the step S501, the device GFa proceeds to a step S503. At the step S503, the device GFa executes a fixed call reception process, receives image information by executing the G4 facsimile transmission procedure between the device GFa and the G4 facsimile device FFa, and stores the received

image information therein.

003050"445950

The device GFa checks whether a destination address of the image information is specified in order to transmit the received image information to a user of the data terminal device DT or the G4 facsimile device FFa at a step S504. If it is ascertained at the step S504 that the destination address of the image information is specified, the device GFa proceeds to a step S505 and executes a fixed transmission process that transmits the image information to the specified destination address. The device GFa then terminates the image-information transmission process.

If it is ascertained at the step S504 that the destination address of the image information is not specified, the device GFa prints out the stored image information at a step S506, and then terminates the image-information transmission process.

If the device GFa receives an email message at the step S502, it checks whether the destination address of the image information is specified in the email message at a step S508. If it is ascertained at the step S508 that the destination address of the image information is not specified, the device GFa extracts the image information from text information of the received email message, and prints out the extracted

image information at a step S509. The device GFa then terminates the image-information transmission process.

If it is ascertained at the step S508 that the destination address of the image information is specified, the email message received from the data terminal device DT by the device GFa is a transmission request message. Accordingly, at a step S510, the device GFa obtains a telephone number of the G4 facsimile device FFa as the destination address of the image information from the received transmission request message. The device GFa then creates the image information from the text information of the received transmission request message at a step S511. Subsequently, at a step S512, the device GFa calls the telephone number obtained at the step S510. At a step S513, the device GFa executes the fixed G4 facsimile transmission procedure and transmits the image information created at the step S511 to the destination address. At a step S514, the device GFa then records, on the reception ability table, a reception ability of the G4 facsimile device FFa that corresponds to contents of the document function list command CDCL obtained from the G4 facsimile device FFa as the destination address during the image-information transmission.

The device GFa then stores a result of the

image-information transmission at a step S516. For instance, the device GFa stores a result that indicates a successful transmission if the device GFa receives the signal RDPBP or the signal RDEP for each page

5 transmitted, and stores a result that indicates a failed transmission if the device GFa does not receive the signal RDPBP or the signal RDEP for any page transmitted.

At a step S517, when receiving the transmission request message, the device GFa checks
10 whether the transmission request message requests the delivery confirmation by the DSN. If it is ascertained that the delivery confirmation by the DSN is requested, the device GFa also checks whether the image-information transmission to the G4 facsimile device FFa is completed
15 without any errors at a step S518.

If it is ascertained at the step S518 that the image transmission is successfully completed, the device GFa proceeds to a step S519, and checks whether the value of "XX" of "NOTIFY='XX'" in the transmission
20 request message requesting the delivery confirmation by the DSN is "SUCCESS" or "SUCCESS, FAILURE".

If the value of the "XX" is "SUCCESS" or "SUCCESS, FAILURE" indicating that a confirmation of a successful delivery is requested, at a step S520, the
25 device GFa creates a DSN delivery-confirmation mail

009060"4T495950

message that indicates the successful transmission and includes information about the reception ability of the G4 facsimile device FFa stored at the step S514.

Subsequently, the device GFa transmits the created DSN

5 delivery-confirmation mail message that includes the reception ability of the G4 facsimile device FFa to a mail address notified in the "MAIL FROM:" field at a step 521, and terminates the image-information transmission process.

10 If the value of the "XX" is found to be "FAILURE" at the step S519, the device GFa does not create the DSN delivery-confirmation mail message, and terminates the image-information transmission process.

If it is ascertained at the step S518 that the
15 image transmission is failed, the device GFa proceeds to a step S522, and checks whether the value of "XX" of "NOTIFY='XX'" in the transmission request message requesting the delivery confirmation by the DSN is "FAILURE" or "SUCCESS, FAILURE".

20 If the value of the "XX" is "FAILURE" or "SUCCESS, FAILURE" indicating that a confirmation of a failed delivery is requested, the device GFa creates the DSN delivery-confirmation mail message that indicates the failure of the transmission at a step S523,
25 transmits the created DSN delivery-confirmation mail

009060444-090600

5

10

15

25

received transmission request message, the device GFa creates a MDN delivery-confirmation mail message as described above that shows a result of the image-information transmission and includes the information about the reception ability of the G4 facsimile device FF at a step S526. The device GFa then transmits the created MDN delivery-confirmation mail message to a mail address specified in the "Disposition-Notification-To:" field at a step S527.

- 10 A description will now be given of a communication system wherein the facsimile gateway device GF (or GFa) transmits a first delivery-confirmation mail message and a second delivery-confirmation mail message to the data terminal device DT.
- 15 The facsimile gateway device GF (or GFa) transmits the first delivery-confirmation mail message to the data terminal device DT, a sender, after receiving the transmission request message therefrom, and then transmits the second delivery-confirmation mail message
- 20 to the data terminal device DT notifying the result of the image-information transmission after completing the image-information transmission to the G3 facsimile device FF (or the G4 facsimile device FFa). Accordingly, a user of the data terminal device DT can recognize a
- 25 current detailed situation of the image-information

000000"443330

transmission requested by the user. Such communication system provides the user of the data terminal device DT a security.

FIGS. 30 and 31 show respectively, one form of the first DSN delivery-confirmation mail message and one form of the first MDN delivery-confirmation mail message.

In the first DSN delivery-confirmation mail message shown in FIG. 21, a line "Action: relayed" indicates that the image information from the data terminal device DT is relayed at the facsimile gateway device GF (or GFa). Similarly, in the first MDN delivery-confirmation mail message shown in FIG. 22, a line "Disposition: manual-action/MDN-sent-manually; dispatched" indicates that the image information from the data terminal device DT is replayed at the facsimile gateway device GF (or GFa).

Additionally, FIGS. 32 and 33 show respectively, one form of the second DSN delivery-confirmation mail message that indicates a successful transmission, and one form of the second MDN delivery-confirmation mail message that also indicates a successful transmission.

In FIG. 23, a line "Action: delivered" indicates that the image information from the data terminal device DT is delivered to its destination

009060"4495950

address, the G3 facsimile device FF (or the G4 facsimile device FFa). Similarly, in FIG. 24, a line "Disposition: manual-action/MDN-sent-manually; displayed" indicates that the image information from the data terminal device DT is delivered to its destination address, the G3 facsimile device FF (or the G4 facsimile device FFa).

Additionally, FIGS. 34 and 35 show respectively, one form of the second DSN delivery-confirmation mail message that indicates a failed transmission, and one form of the second MDN delivery-confirmation mail message that also indicates a failed transmission.

In FIG. 25, a line "Action: failed" indicates that the image-information transmission from the data terminal device DT to the G3 facsimile device FF (or the G4 facsimile device FFa), the destination address, is completely or partially failed. Similarly, in FIG. 26, a line "Disposition: manual-action/MDN-sent-manually; failed" indicates that the image information from the data terminal device DT to the G3 facsimile device FF (or the G4 facsimile device FFa), the destination address, is completely or partially failed.

FIGS. 27A, 27B and 27C are flowcharts showing a third image-information transmission process taken by

009060" 4749960

the facsimile gateway device GF in the first embodiment of the present invention, wherein the facsimile gateway device GF transmits the first delivery-confirmation mail message and the second delivery-confirmation mail message to the data terminal device DT.

The facsimile gateway device GF initially detects a reception of a call from the PSTN or an email message (NO at a step S601 and NO at a step S602).

In a case that the facsimile gateway device GF receives the call from the PSTN at the step S601, the device GF proceeds to a step S603. At the step S603, the device GF executes a fixed call reception process, receives image information by executing the G3 facsimile transmission procedure between the device GF and the G3 facsimile device FF, and stores the received image information therein.

The device GF checks whether a destination address of the image information is specified in order to transmit the received image information to a user of the data terminal device DT or the G3 facsimile device FF at a step S604. If it is ascertained at the step S604 that the destination address of the image information is specified, the device GF proceeds to a step S605 and executes a fixed transmission process that transmits the image information to the specified

destination address. The device GF then terminates the image-information transmission process.

If it is ascertained at the step S604 that the destination address of the image information is not
5 specified, the device GF prints out the stored image information at a step S606, and then terminates the image-information transmission process.

If the device GF receives an email message at the step S602, it checks whether the received email
10 message requests a DSN delivery-confirmation mail message at a step S607. If it is ascertained at the step S607 that the received email message requests the DSN delivery-confirmation mail message, the device GF creates a first DSN delivery-confirmation mail message
15 that indicates the successful transmission of the image information to the G3 facsimile device FF at a step S608. Subsequently, at a step S609, the device GF transmits the first DSN delivery-confirmation mail message created at the step S608 to the data terminal device DT. The
20 device GF then proceeds to a later described step S613.

If it is ascertained at the step S607 that the delivery confirmation by the DSN is not requested by the received email message, the device GF proceeds to a step S610. The device GF checks whether the received email
25 message requests a MDN delivery-confirmation mail

009060"443950

At the step S613, the device GF checks whether the destination address of the image information is specified in the email message. If it is ascertained at the step S613 that the destination address of the image information is not specified, the device GF extracts the image information from text information of the received email message, and prints out the extracted image information at a step S614. The device GF then terminates the image-information transmission process.

009060"44-090600

If it is ascertained at the step S613 that the destination address of the image information is specified, the email message received from the data terminal device DT by the device GF is a transmission request message. Accordingly, at a step S615, the device GF obtains a telephone number of the G3 facsimile device FF as the destination address of the image information from the received transmission request message. The device GF then creates the image information from the text information of the received transmission request message at a step S616. Subsequently, at a step S617, the device GF calls the telephone number obtained at the step S615. At a step S618, the device GF executes the fixed G3 facsimile transmission procedure and transmits the image information created at the step S616 to the destination address. The device GF then stores a result of the image-information transmission at a step S619. For instance, the device GF stores a result that indicates a successful transmission if the device GF receives the signal MCF for each page transmitted, and stores a result that indicates a failed transmission if the device GF does not receive the signal MCF for any page transmitted.

25 Additionally, when receiving the transmission

5

10

15

25

If it is ascertained at the step S621 that the
5 image transmission is failed, the device GF proceeds to
a step S625, and checks whether the value of "XX" of
"NOTIFY='XX'" in the transmission request message
requesting the delivery confirmation by the DSN is
"FAILURE" or "SUCCESS, FAILURE".

20 If the value of the "XX" is found to be "SUCCESS" at the step S625, the device GF does not creates the second DSN delivery-confirmation mail message, and terminates the image-information transmission process.

If it is ascertained that the delivery

25 confirmation by the DSN is not requested at the step

005050"4795960

S620, the device GF proceeds to a step S630, and checks whether the "Disposition-Notification-To:" field is included in the mail header of the received transmission request message. If it is ascertained at the step S630 that the "Disposition-Notification-To:" field is not included in the received transmission request message, the device GF determines that transmission request message does not request for the delivery confirmation by the MDN, and terminates the image-information transmission process.

If it is ascertained at the step S630 that the "Disposition-Notification-To:" field is included in the received transmission request message, the device GF creates a second MDN delivery-confirmation mail message as described above that shows a result of the image-information transmission at a step S631, and transmits the created second MDN delivery-confirmation mail message to a mail address specified in the "Disposition-Notification-To:" field at a step S632.

FIGS. 28A, 28B and 28C are flowcharts showing a third image-information transmission process taken by the facsimile gateway device GFa in the second embodiment of the present invention, wherein the facsimile gateway device GFa transmits the first delivery-confirmation mail message and the second

The facsimile gateway device GFa initially detects a reception of a call from the ISDN or an email message (NO at a step S701 and NO at a step S702).

The device GFa checks whether a destination address of the image information is specified in order to transmit the received image information to a user of the data terminal device DT or the G4 facsimile device FFa at a step S704. If it is ascertained at the step S704 that the destination address of the image information is specified, the device GFa proceeds to a step S705 and executes a fixed transmission process that transmits the image information to the specified destination address. The device GFa then terminates the image-information transmission process.

destination address of the image information is not specified, the device GFa prints out the stored image information at a step S706, and then terminates the image-information transmission process.

5 If the device GFa receives an email message at the step S702, it checks whether the received email message requests a DSN delivery-confirmation mail message at a step S707. If it is ascertained at the step S707 that the received email message requests the
10 DSN delivery-confirmation mail message, the device GFa creates a first DSN delivery-confirmation mail message that indicates the successful transmission of the image information to the G4 facsimile device FFa at a step S708. Subsequently, at a step S709, the device GFa
15 transmits the first DSN delivery-confirmation mail message created at the step S708 to the data terminal device DT. The device GFa then proceeds to a later described step S713.

 If it is ascertained at the step S707 that the
20 delivery confirmation by the DSN is not requested by the received email message, the device GFa proceeds to a step S710. The device GFa checks whether the received email message requests a MDN delivery-confirmation mail message at the step S710. If it is ascertained at the
25 step S710 that the received email message requests the

005050"449590

MDN delivery-confirmation mail message, the device GFa creates a first MDN delivery-confirmation mail message that indicates the successful transmission of the image information to the G4 facsimile device FFa at a step

5 S711. Subsequently, at a step S712, the device GFa transmits the first MDN delivery-confirmation mail message created at the step S711 to the data terminal device DT. The device GFa then proceeds to the later described step S713.

10 If the delivery confirmation by the DSN is not requested at the step S707 and the MDN delivery-confirmation mail message is not requested at the step S710, the device GFa does not transmit the first delivery-confirmation mail message to the data terminal
15 device DT, and proceeds to the step S713.

At the step S713, the device GFa checks whether the destination address of the image information is specified in the email message. If it is ascertained at the step S713 that the destination address of the
20 image information is not specified, the device GFa extracts the image information from text information of the received email message, and prints out the extracted image information at a step S714. The device GFa then terminates the image-information transmission process.

25 If it is ascertained at the step S713 that the

005050"47495950

destination address of the image information is specified, the email message received from the data terminal device DT by the device GFa is a transmission request message. Accordingly, at a step S715, the

5 device GFa obtains a telephone number of the G4 facsimile device FFa as the destination address of the image information from the received transmission request message. The device GFa then creates the image information from the text information of the received

10 transmission request message at a step S716. Subsequently, at a step S717, the device GFa calls the telephone number obtained at the step S715. At a step S718, the device GFa executes the fixed G4 facsimile transmission procedure and transmits the image

15 information created at the step S716 to the destination address. The device GFa then stores a result of the image-information transmission at a step S719. For instance, the device GFa stores a result that indicates a successful transmission if the device GFa receives the

20 signal RDPBP or the signal RDEP for each page transmitted, and stores a result that indicates a failed transmission if the device GFa does not receive the signal RDPBP or the signal RDEP for any page transmitted.

Additionally, when receiving the transmission

25 request message, the device GFa checks whether the

009060"4T495960

5

10

15

25

message, and terminates the image-information transmission process.

If it is ascertained at the step S721 that the image transmission is failed, the device GFa proceeds to
5 a step S725, and checks whether the value of "XX" of "NOTIFY='XX'" in the transmission request message requesting the delivery confirmation by the DSN is "FAILURE" or "SUCCESS, FAILURE".

If the value of the "XX" is "FAILURE" or
10 "SUCCESS, FAILURE" indicating that a confirmation of a failed delivery is requested, the device GFa creates a second DSN delivery-confirmation mail message that indicates the failure of the transmission at a step S726, transmits the created second DSN delivery-confirmation
15 mail message to the mail address notified in the "MAIL FROM:" field at a step S727, and terminates the image-information transmission process.

If the value of the "XX" is found to be "SUCCESS" at the step S725, the device GFa does not
20 creates the second DSN delivery-confirmation mail message, and terminates the image-information transmission process.

If it is ascertained that the delivery confirmation by the DSN is not requested at the step
25 S720, the device GFa proceeds to a step S730, and checks

0965644.09600

5

10

20

25

of the present invention describe a facsimile gateway
device (an Internet facsimile gateway device) that has a
terminal device function. However, the present
invention may be similarly adopted for a facsimile
5 gateway device that only includes a transmission
function.

The above description is provided in order to
enable any person skilled in the art to make and use the
invention and sets forth the best mode contemplated by
10 the inventors of carrying out the invention.

The present invention is not limited to the
specifically disclosed embodiments and variations, and
modifications may be made without departing from the
scope and spirit of the invention.

15 The present application is based on Japanese
Priority Application No. 2000-045560, filed on February
23, 2000 with the Japanese Patent Office, the entire
contents of which are hereby incorporated by reference.

WHAT IS CLAIMED IS:

5

1. An Internet facsimile gateway device connected to a telecommunication network and the Internet, comprising;

an image-information transmitting unit that
10 transmits image information included in an electronic
mail message to a facsimile device when said Internet
facsimile gateway device receives said electronic mail
message requesting image-information transmission to the
facsimile device;

15 a delivery-confirmation-mail creating unit
that creates a delivery-confirmation mail message
notifying a result of the image-information transmission
after the image-information transmission by said
Internet facsimile gateway device is completed, if said
20 electronic mail message requests said Internet facsimile
gateway device to transmit the delivery-confirmation
mail message to an original address of said electronic
mail message; and

a delivery-confirmation-mail transmitting unit
25 that transmits the delivery-confirmation mail message to

the original address of said electronic mail message.

5

2. The Internet facsimile gateway device as claimed in claim 1, wherein:

the delivery-confirmation mail message is regulated by a DSN; and

10

the delivery-confirmation-mail creating unit creates the delivery-confirmation mail message regulated by the DSN notifying a successful image transmission after the image-information transmission by said Internet facsimile gateway device is succeeded, if said electronic mail message requests said Internet facsimile gateway device to transmit the delivery-confirmation mail message regulated by the DSN notifying the successful image transmission to the original address of said electronic mail message.

15

20

3. The Internet facsimile gateway device as claimed in claim 1, wherein:

25

009060"4T49960

the delivery-confirmation mail message is
regulated by the DSN; and

the delivery-confirmation-mail creating unit
that creates the delivery-confirmation mail message
5 regulated by the DSN notifying a failed image
transmission after the image-information transmission by
said Internet facsimile gateway device is failed, if
said electronic mail message requests said Internet
facsimile gateway device to transmit the delivery-
10 confirmation mail message regulated by the DSN notifying
the failed image transmission to the original address of
said electronic mail message.

15

4. The Internet facsimile gateway device as
claimed in claim 1, wherein:

the delivery-confirmation mail message is
20 regulated by a MDN; and

the delivery-confirmation-mail creating unit
that creates the delivery-confirmation mail message
regulated by the MDN notifying the successful image
transmission after the image-information transmission by
25 said Internet facsimile gateway device is succeeded, if

009060"4T495950

said electronic mail message requests said Internet
facsimile gateway device to transmit the delivery-
confirmation mail message regulated by the MDN notifying
the successful image transmission to the original
5 address of said electronic mail message.

10 5. The Internet facsimile gateway device as
claimed in claim 1, wherein:
the delivery-confirmation mail message is
regulated by the MDN; and
the delivery-confirmation-mail creating unit
15 creates the delivery-confirmation mail message regulated
by the MDN notifying the failed image transmission after
the image-information transmission by said Internet
facsimile gateway device is failed, if said electronic
mail message requests said Internet facsimile gateway
20 device to transmit the delivery-confirmation mail
message regulated by the MDN notifying the failed image
transmission to the original address of said electronic
mail message.

25

009060-4495950

6. The Internet facsimile gateway device as
claimed in claim 1, wherein the delivery-confirmation
mail message further comprising a first extension field
that indicates a total number of pages transmitted to
5 the facsimile device.

10 7. The Internet facsimile gateway device as
claimed in claim 1, wherein the delivery-confirmation
mail message further comprising a second extension field
that indicates a communication charge for transmitting
the image information to the facsimile device.

15

8. The Internet facsimile gateway device as
20 claimed in claim 1, wherein the delivery-confirmation
mail message further comprising a third extension field
that indicates a time at which the image-information
transmission is completed.

25

009060"47495950

9. The Internet facsimile gateway device as claimed in claim 1, wherein the telecommunication network is a general switched telephone network GSTN.

5

10. The Internet facsimile gateway device as claimed in claim 1, wherein the telecommunication network is an analog public network PSTN, and the facsimile device is a G3 facsimile device.

15

11. The Internet facsimile gateway device as claimed in claim 1, wherein the telecommunication network is an integrated services digital network ISDN, and the facsimile device is a G4 facsimile device.

20

12. The Internet facsimile gateway device as claimed in claim 1, wherein said delivery-confirmation-

25

009060-4749960

mail creating unit creates the delivery-confirmation
mail message that notifies the result of the image-
information transmission, said result including
reception ability information of the facsimile device
5 received therefrom, after the image-information
transmission by said Internet facsimile gateway device
is completed if said electronic mail message requests
said Internet facsimile gateway device to transmit the
delivery-confirmation mail message to the original
10 address of said electronic mail message.

15 13. The Internet facsimile gateway device as
claimed in claim 12, wherein the telecommunication
network is an analog public network PSTN, and the
facsimile device is a G3 facsimile device.

20

14. The Internet facsimile gateway device as
claimed in claim 13, wherein the reception ability
25 information of the G3 facsimile device is a content of a

005050"4T495950

signal DIS (Digital Identification Signal) notified
therefrom.

5

15. The Internet facsimile gateway device as
claimed in claim 13, wherein the reception ability
information of the G3 facsimile device is a content of a
10 signal NSF (Non-Standard Facilities) notified therefrom.

15 16. The Internet facsimile gateway device as
claimed in claim 13, wherein the reception ability
information of the G3 facsimile device is a content of a
signal JM notified therefrom.

20

17. The Internet facsimile gateway device as
claimed in claim 13, wherein the reception ability
25 information of the G3 facsimile device is information

009060" 4T495960

about a function to connect to the Internet in a case
that the G3 facsimile device includes the function to
connect to the Internet.

5

18. The Internet facsimile gateway device as
claimed in claim 17, wherein the reception ability
10 information of the G3 facsimile device includes a
content of a signal CSA notified therefrom.

15

19. The Internet facsimile gateway device as
claimed in claim 12, wherein the telecommunication
network is an integrated services digital network ISDN,
and the facsimile device is a G4 facsimile device.

20

20. The Internet facsimile gateway device as
25 claimed in claim 19, wherein the reception ability

009060"4T495950

information of the G4 facsimile device is a content of a signal RDCLP notified therefrom.

5

21. An Internet facsimile gateway device connected to a telecommunication network and the Internet, comprising:

10 an image-information transmitting unit that transmits image information included in an electronic mail message to a facsimile device when said Internet facsimile gateway device receives said electronic mail message requesting image-information transmission to the
15 facsimile device;

a first-delivery-confirmation-mail creating unit that creates a first delivery-confirmation mail message notifying a successful transmission of said electronic mail message to said facsimile device, after
20 receiving said electronic mail message if said electronic mail message requests said Internet facsimile gateway device to transmit the delivery-confirmation mail message to an original address of said electronic mail message;

25 a first-delivery-confirmation-mail

096644.09660

transmitting unit that transmits the first delivery-confirmation mail message to the original address of said electronic mail message;

5 a second-delivery-confirmation-mail creating unit that creates a second delivery-confirmation mail message notifying a result of the image-information transmission by said Internet facsimile gateway device to the facsimile device after said image-information transmission; and

10 a second-delivery-confirmation-mail transmitting unit that transmits the second delivery-confirmation mail message to the original address of said electronic mail message.

15

22. The Internet facsimile gateway device as claimed in claim 21, wherein:

20 the first delivery-confirmation mail message is regulated by a DSN;

the second delivery-confirmation mail message is regulated by the DSN; and

25 the second-delivery-confirmation-mail creating unit creates the second delivery-confirmation mail

005050-449590

10

15

the second delivery-confirmation mail message
is regulated by the DSN; and

the second-delivery-confirmation-mail creating
20 unit that creates the second delivery-confirmation mail
message regulated by the DSN notifying a failed image
transmission after the image-information transmission by
said Internet facsimile gateway device is failed, if
said electronic mail message requests said Internet
25 facsimile gateway device to transmit the delivery-

confirmation mail message regulated by the DSN notifying the failed image transmission to the original address of said electronic mail message.

5

24. The Internet facsimile gateway device as claimed in claim 21, wherein:

- 10 the first delivery-confirmation mail message is regulated by a MDN;
- the second delivery-confirmation mail message is regulated by the MDN; and
- the second-delivery-confirmation-mail creating
- 15 unit that creates the second delivery-confirmation mail message regulated by the MDN notifying the successful image transmission after the image-information transmission by said Internet facsimile gateway device is succeeded, if said electronic mail message requests
- 20 said Internet facsimile gateway device to transmit the delivery-confirmation mail message regulated by the MDN notifying the successful image transmission to the original address of said electronic mail message.

25

009060"4445950

25. The Internet facsimile gateway device as claimed in claim 21, wherein:

the first delivery-confirmation mail message is regulated by the MDN;

5 the second delivery-confirmation mail message is regulated by the MDN; and

the second-delivery-confirmation-mail creating unit creates the second delivery-confirmation mail message regulated by the MDN notifying the failed image
10 transmission after the image-information transmission by said Internet facsimile gateway device is failed, if said electronic mail message requests said Internet facsimile gateway device to transmit the delivery-confirmation mail message regulated by the MDN notifying
15 the failed image transmission to the original address of said electronic mail message.

20

26. The Internet facsimile gateway device as claimed in claim 21, wherein the telecommunication network is a general switched telephone network GSTN.

25

009060"4T95960

27. The Internet facsimile gateway device as claimed in claim 21, wherein the telecommunication network is an analog public network PSTN, and the facsimile device is a G3 facsimile device.

5

28. The Internet facsimile gateway device as claimed in claim 21, wherein the telecommunication network is an integrated services digital network ISDN, and the facsimile device is a G4 facsimile device.

10

15

29. A method of controlling an Internet facsimile gateway device, comprising the steps of:
connecting to a telecommunication network and
the Internet;

20

transmitting image information included in an electronic mail message to a facsimile device when receiving said electronic mail message requesting image-information transmission to the facsimile device;

25

creating a delivery-confirmation mail message

009060"44.090600

notifying a result of the image-information transmission
after completing the image-information transmission, if
said electronic mail message requests said Internet
facsimile gateway device to transmit the delivery-
5 confirmation mail message to an original address of said
electronic mail message; and

transmitting the delivery-confirmation mail
message to the original address of said electronic mail
message.

10

30. The method of controlling the Internet
15 facsimile gateway device as claimed in claim 29, wherein
the delivery-confirmation mail message is regulated by a
DSN, said method comprising the step of creating the
delivery-confirmation mail message regulated by the DSN
notifying a successful image transmission after the
20 image-information transmission by said Internet
facsimile gateway device is succeeded, if said
electronic mail message requests said Internet facsimile
gateway device to transmit the delivery-confirmation
mail message regulated by the DSN notifying the
25 successful image transmission to the original address of

009060"4T495950

said electronic mail message.

5

31. The method of controlling the Internet
facsimile gateway device as claimed in claim 29, wherein
the delivery-confirmation mail message is regulated by
the DSN, said method comprising the step of creating the
10 delivery-confirmation mail message regulated by the DSN
notifying a failed image transmission after the image-
information transmission by said Internet facsimile
gateway device is failed, if said electronic mail
message requests said Internet facsimile gateway device
15 to transmit the delivery-confirmation mail message
regulated by the DSN notifying the failed image
transmission to the original address of said electronic
mail message.

20

32. The method of controlling the Internet
facsimile gateway device as claimed in claim 29, wherein
25 the delivery-confirmation mail message is regulated by a

009060"44.090600

15 33. The method of controlling the Internet
facsimile gateway device as claimed in claim 29, wherein
the delivery-confirmation mail message is regulated by
the MDN, said method comprising the step of creating the
delivery-confirmation mail message regulated by the MDN
20 notifying the failed image transmission after the image-
information transmission by said Internet facsimile
gateway device is failed, if said electronic mail
message requests said Internet facsimile gateway device
to transmit the delivery-confirmation mail message
25 regulated by the MDN notifying the failed image

transmission to the original address of said electronic mail message.

5

34. The method of controlling the Internet facsimile gateway device as claimed in claim 29, wherein the telecommunication network is a general switched telephone network GSTN, said method comprising the step of connecting to the general switched telephone network GSTN and the Internet.

15

35. The method of controlling the Internet facsimile gateway device as claimed in claim 29, wherein the telecommunication network is an analog public network PSTN, and the facsimile device is a G3 facsimile device, said method comprising the steps of:

connecting to the analog public network PSTN and the Internet; and

exchanging the image information with the G3 facsimile device through the connected analog public

25

009060"449560

network PSTN.

5

36. The method of controlling the Internet
facsimile gateway device as claimed in claim 29, wherein
the telecommunication network is an integrated services
digital network ISDN, and the facsimile device is a G4
10 facsimile device, said method comprising the steps of:
connecting to the integrated services digital
network ISDN and the Internet; and
exchanging the image information with the G4
facsimile device through the connected integrated
15 services digital network ISDN.

20

37. The method of controlling an Internet
facsimile gateway device as claimed in claim 29, said
method comprising the step of creating the delivery-
confirmation mail message that notifies the result of
the image-information transmission, said result
25 including reception ability information of the facsimile

003060"41495950

device received therefrom, after completing the image-
information transmission if said electronic mail message
requests said Internet facsimile gateway device to
transmit the delivery-confirmation mail message to the
5 original address of said electronic mail message.

009060"44-090600

10 38. A method of controlling an Internet
facsimile gateway device, comprising the steps of:
connecting to a telecommunication network and
the Internet;
transmitting image information included in an
15 electronic mail message to a facsimile device after
receiving said electronic mail message requesting image-
information transmission to the facsimile device;
creating a first delivery-confirmation mail
message notifying a successful transmission of said
20 electronic mail message to said facsimile device, after
receiving said electronic mail message if said
electronic mail message requests said Internet facsimile
gateway device to transmit the delivery-confirmation
mail message to an original address of said electronic
25 mail message;

transmitting the first delivery-confirmation
mail message to the original address of said electronic
mail message;

creating a second delivery-confirmation mail
5 message notifying a result of the image-information
transmission by said Internet facsimile gateway device
to the facsimile device after said image-information
transmission; and

transmitting the second delivery-confirmation
10 mail message to the original address of said electronic
mail message.

15

39. The method of controlling the Internet
facsimile gateway device as claimed in claim 38, wherein
the first delivery-confirmation mail message is
regulated by a DSN, and the second delivery-confirmation
20 mail message is regulated by the DSN, said method
comprising the step of creating the second delivery-
confirmation mail message regulated by the DSN notifying
a successful image transmission after the image-
information transmission by said Internet facsimile
25 gateway device is succeeded, if said electronic mail

009060-4T495960

message requests said Internet facsimile gateway device
to transmit the delivery-confirmation mail message
regulated by the DSN notifying the successful image
transmission to the original address of said electronic
5 mail message.

009060-4435960
10 40. The method of controlling the Internet
facsimile gateway device as claimed in claim 38, wherein
the first delivery-confirmation mail message is
regulated by the DSN, and the second delivery-
confirmation mail message is regulated by the DSN, said
15 method comprising the step of creating the second
delivery-confirmation mail message regulated by the DSN
notifying a failed image transmission after the image-
information transmission by said Internet facsimile
gateway device is failed, if said electronic mail
20 message requests said Internet facsimile gateway device
to transmit the delivery-confirmation mail message
regulated by the DSN notifying the failed image
transmission to the original address of said electronic
mail message.

25

41. The method of controlling the Internet facsimile gateway device as claimed in claim 38, wherein the first delivery-confirmation mail message is regulated by a MDN, and the second delivery-confirmation mail message is regulated by the MDN, said method comprising the step of creating the second delivery-confirmation mail message regulated by the MDN notifying the successful image transmission after the image-information transmission by said Internet facsimile gateway device is succeeded, if said electronic mail message requests said Internet facsimile gateway device to transmit the delivery-confirmation mail message regulated by the MDN notifying the successful image transmission to the original address of said electronic mail message.

42. The method of controlling the Internet facsimile gateway device as claimed in claim 38, wherein the first delivery-confirmation mail message is regulated by the MDN, and the second delivery-confirmation mail message is regulated by the MDN, said method comprising the step of creating the second

delivery-confirmation mail message regulated by the MDN
notifying the failed image transmission after the image-
information transmission by said Internet facsimile
gateway device is failed, if said electronic mail
5 message requests said Internet facsimile gateway device
to transmit the delivery-confirmation mail message
regulated by the MDN notifying the failed image
transmission to the original address of said electronic
mail message.

10

43. The method of controlling the Internet
15 facsimile gateway device as claimed in claim 38, wherein
the telecommunication network is a general switched
telephone network GSTN, said method comprising the step
of connecting to the general switched telephone network
GSTN and the Internet.

20

44. The method of controlling the Internet
25 facsimile gateway device as claimed in claim 38, wherein

009060"41495950

the telecommunication network is an analog public network PSTN, and the facsimile device is a G3 facsimile device, said method comprising the steps of:

connecting to the analog public network PSTN
5 and the Internet; and

exchanging the image information with the G3 facsimile device through the connected analog public network PSTN.

10

45. The method of controlling the Internet facsimile gateway device as claimed in claim 38, wherein
15 the telecommunication network is an integrated services digital network ISDN, and the facsimile device is a G4 facsimile device, said method comprising the steps of:

connecting to the integrated services digital network ISDN and the Internet; and

20 exchanging the image information with the G4 facsimile device through the connected integrated services digital network ISDN.

009050"4749560

An Internet facsimile gateway device that exchanges image information between a data terminal device and a facsimile device through a

20

FIG.1

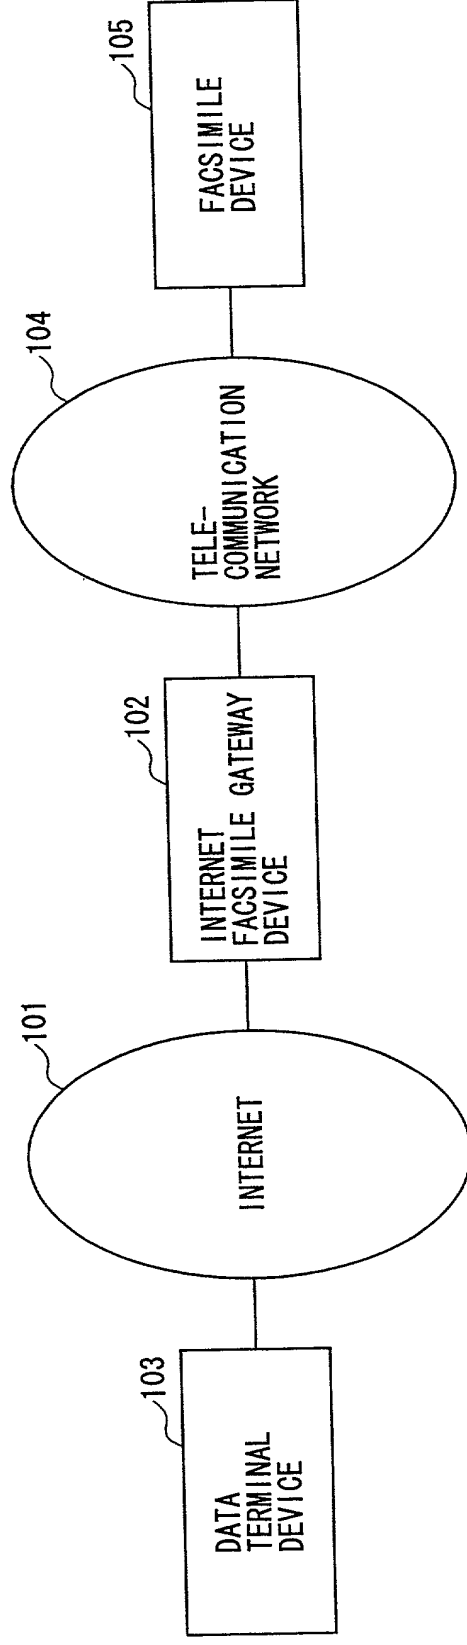


FIG.2

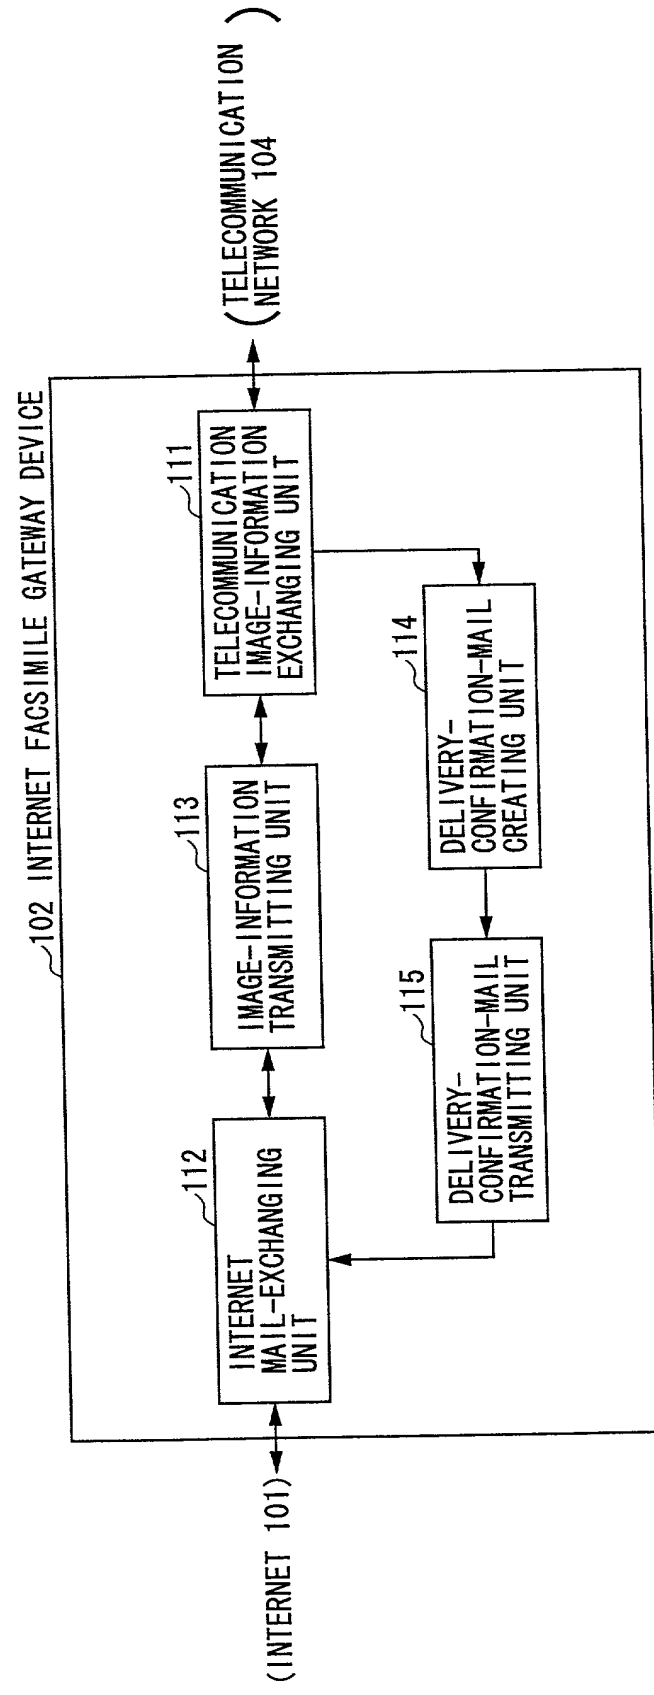


FIG.3

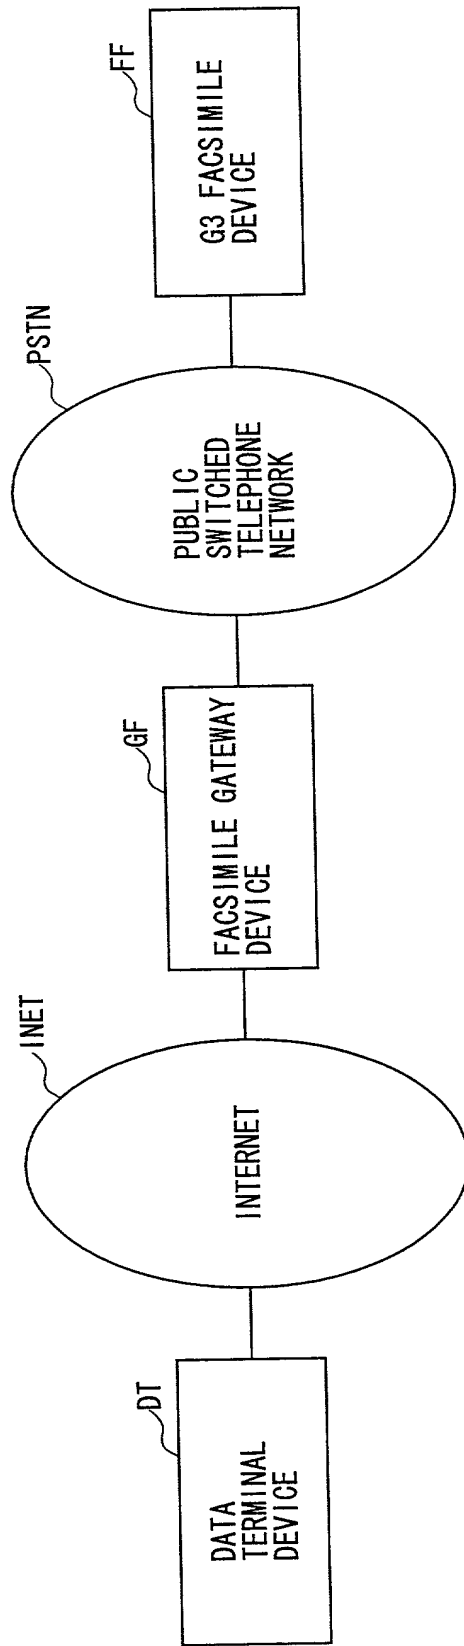


FIG. 4


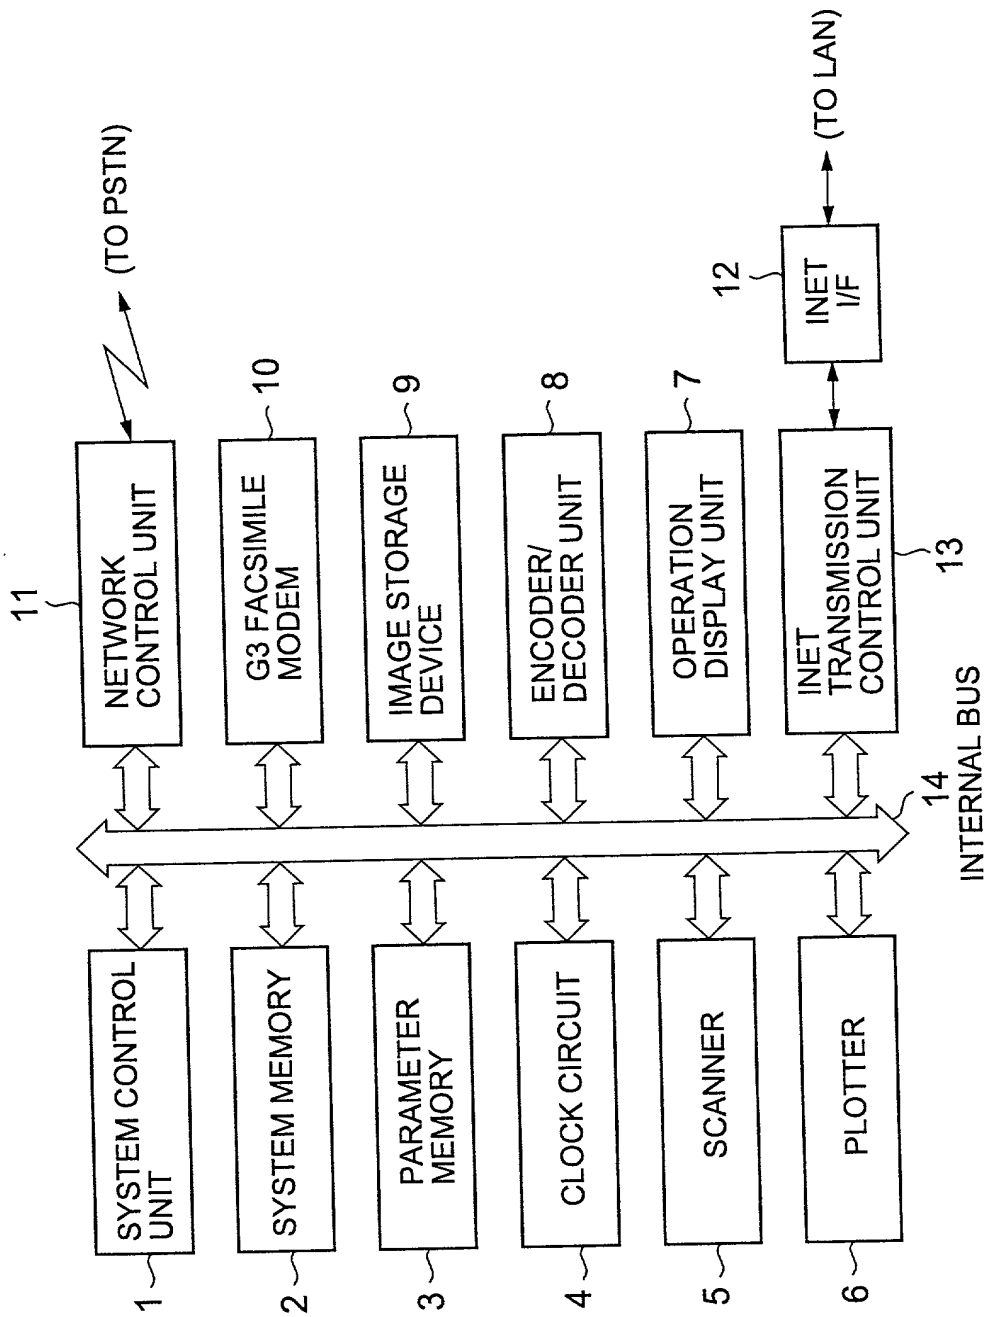


FIG.5

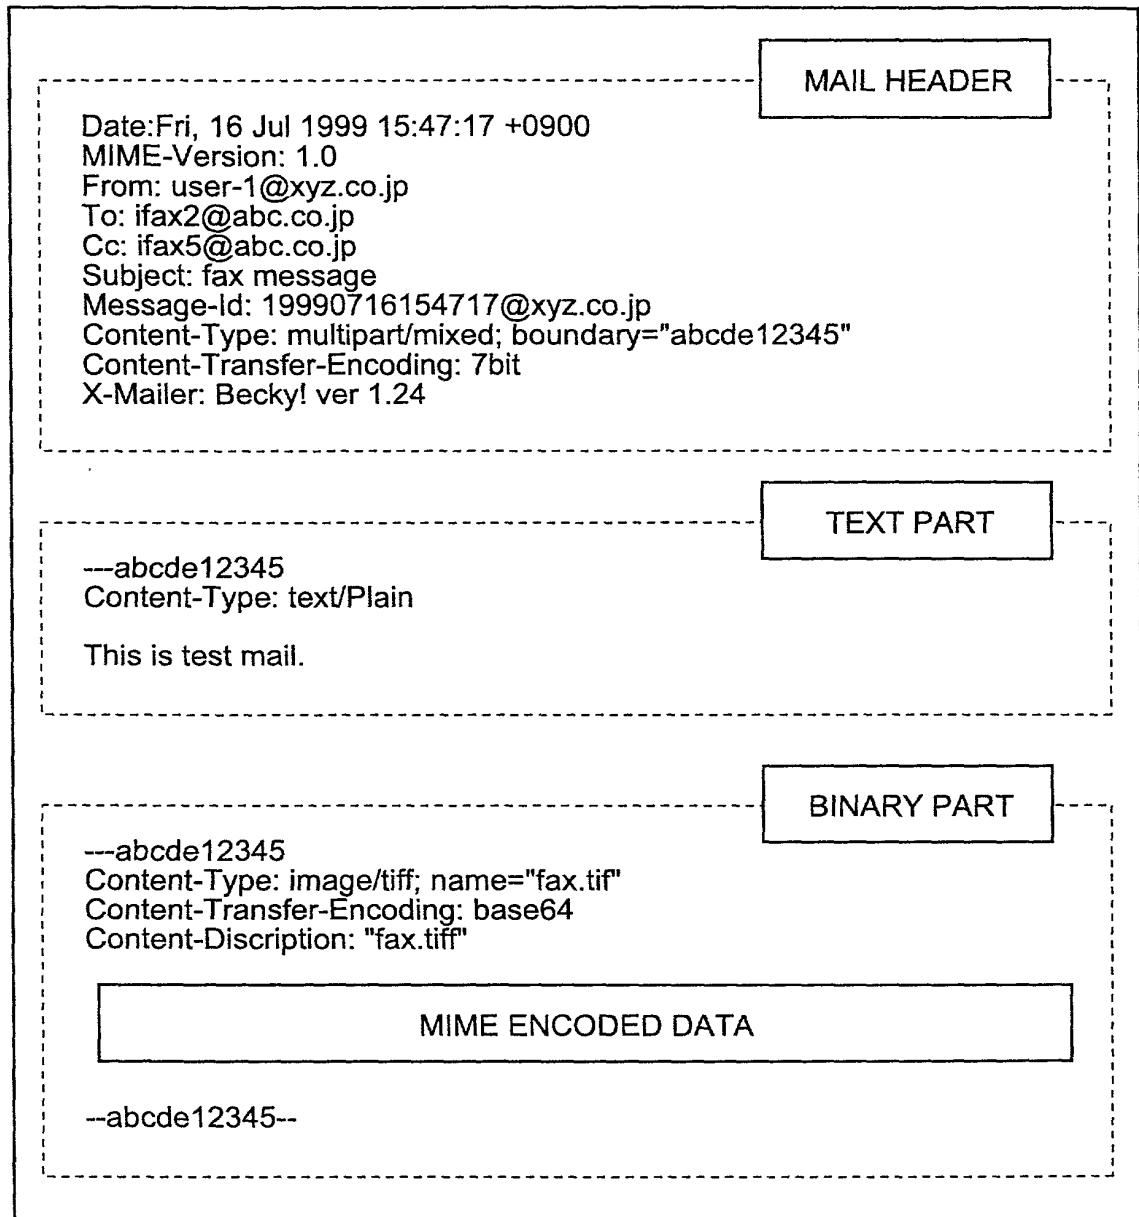

009060"4T495360

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
2	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
3	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
4	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
5	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80																				


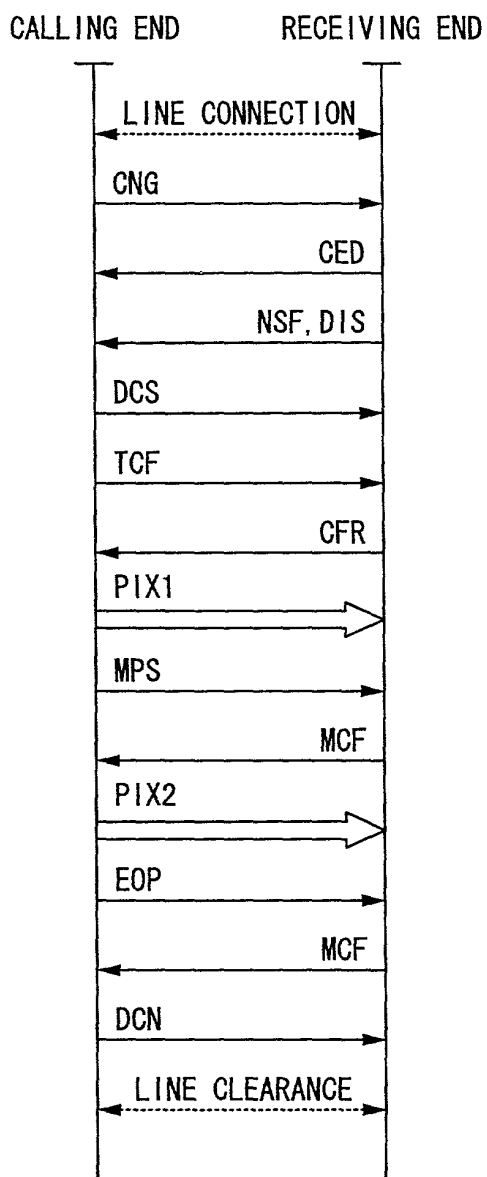


FIG.7

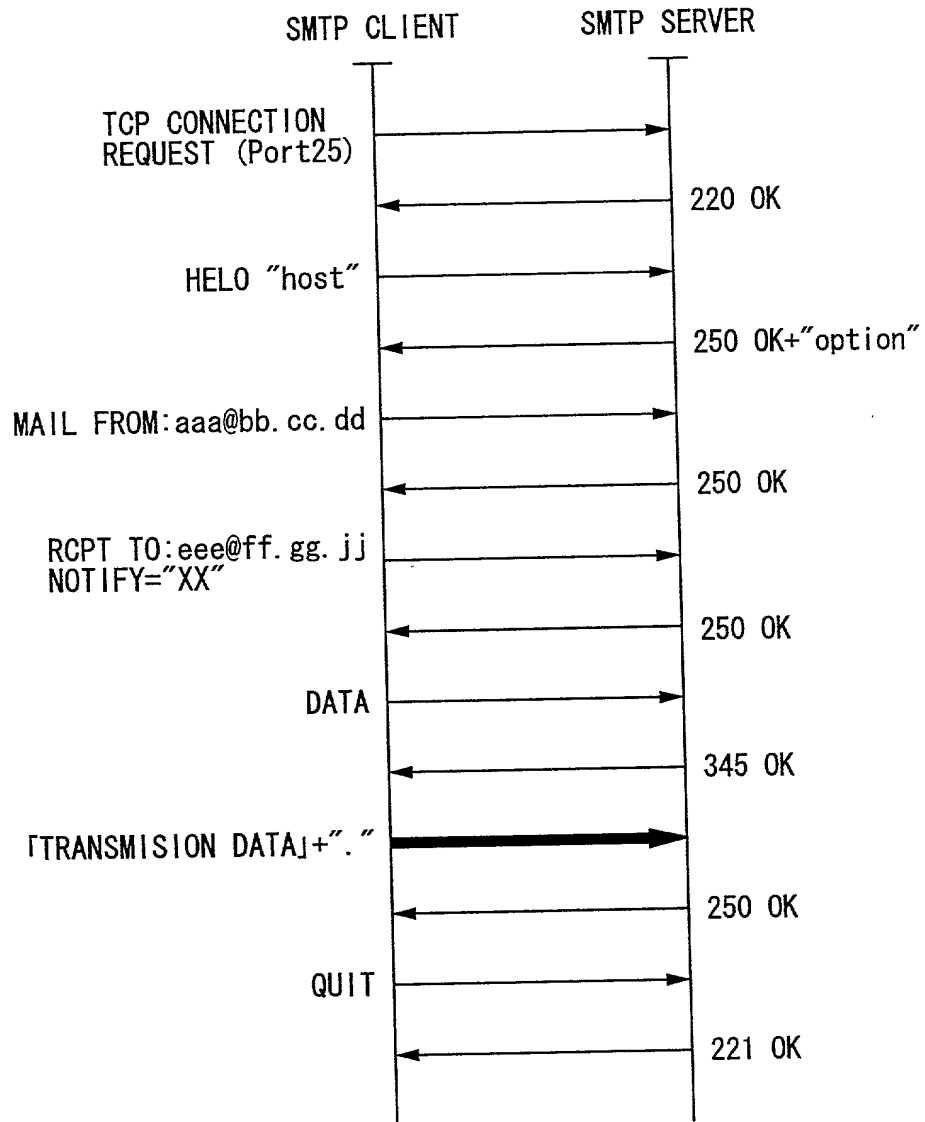

009060"4749960

Parameter	Value
Age (years)	25.0
Weight (kg)	70.0
Height (cm)	175.0
BMI (kg/m ²)	22.5
Sex	Male
Marital status	Single
Education (years)	12.0
Occupation	Student
Smoking status	Non-smoker
Alcohol consumption (g/day)	0.0
Exercise (min/week)	150.0
Family history of diabetes	No
Family history of hypertension	No
Family history of heart disease	No
Family history of stroke	No
Family history of cancer	No
Family history of other diseases	No
Current medications	None
Previous medical conditions	None
Current symptoms	None
Physical examination	Normal
Vital signs	Normal
ECG	Normal
ECG interpretation	Normal
ECG findings	Normal
ECG measurements	Normal
ECG parameters	Normal
ECG results	Normal
ECG conclusion	Normal
ECG summary	Normal
ECG notes	Normal
ECG comments	Normal
ECG observations	Normal
ECG impressions	Normal
ECG findings	Normal
ECG measurements	Normal
ECG parameters	Normal
ECG results	Normal
ECG conclusion	Normal
ECG summary	Normal
ECG notes	Normal
ECG comments	Normal
ECG observations	Normal
ECG impressions	Normal
ECG findings	Normal
ECG measurements	Normal
ECG parameters	Normal
ECG results	Normal
ECG conclusion	Normal
ECG summary	Normal
ECG notes	Normal
ECG comments	Normal
ECG observations	Normal
ECG impressions	Normal
ECG findings	Normal
ECG measurements	Normal
ECG parameters	Normal
ECG results	Normal
ECG conclusion	Normal
ECG summary	Normal
ECG notes	Normal
ECG comments	Normal
ECG observations	Normal
ECG impressions	Normal
ECG findings	Normal
ECG measurements	Normal
ECG parameters	Normal
ECG results	Normal
ECG conclusion	Normal
ECG summary	Normal
ECG notes	Normal
ECG comments	Normal
ECG observations	Normal
ECG impressions	Normal
ECG findings	Normal
ECG measurements	Normal
ECG parameters	Normal
ECG results	Normal
ECG conclusion	Normal
ECG summary	Normal
ECG notes	Normal
ECG comments	Normal
ECG observations	Normal
ECG impressions	Normal
ECG findings	Normal
ECG measurements	Normal
ECG parameters	Normal
ECG results	Normal
ECG conclusion	Normal
ECG summary	Normal
ECG notes	Normal
ECG comments	Normal
ECG observations	Normal
ECG impressions	Normal
ECG findings	Normal
ECG measurements	Normal
ECG parameters	Normal
ECG results	Normal
ECG conclusion	Normal
ECG summary	Normal
ECG notes	Normal
ECG comments	Normal
ECG observations	Normal
ECG impressions	Normal
ECG findings	Normal
ECG measurements	Normal
ECG parameters	Normal
ECG results	Normal
ECG conclusion	Normal
ECG summary	Normal
ECG notes	Normal
ECG comments	Normal
ECG observations	Normal
ECG impressions	Normal
ECG findings	Normal
ECG measurements	Normal
ECG parameters	Normal
ECG results	Normal
ECG conclusion	Normal
ECG summary	Normal
ECG notes	Normal
ECG comments	Normal
ECG observations	Normal
ECG impressions	Normal
ECG findings	Normal
ECG measurements	Normal
ECG parameters	Normal
ECG results	Normal
ECG conclusion	Normal
ECG summary	Normal
ECG notes	Normal
ECG comments	Normal
ECG observations	Normal
ECG impressions	Normal
ECG findings	Normal
ECG measurements	Normal
ECG parameters	Normal
ECG results	Normal
ECG conclusion	Normal
ECG summary	Normal
ECG notes	Normal
ECG comments	Normal
ECG observations	Normal
ECG impressions	Normal
ECG findings	Normal
ECG measurements	Normal
ECG parameters	Normal
ECG results	Normal
ECG conclusion	Normal
ECG summary	Normal
ECG notes	Normal
ECG comments	Normal
ECG observations	Normal
ECG impressions	Normal
ECG findings	Normal
ECG measurements	Normal
ECG parameters	Normal
ECG results	Normal
ECG conclusion	Normal
ECG summary	Normal
ECG notes	Normal
ECG comments	Normal
ECG observations	Normal
ECG impressions	Normal
ECG findings	Normal
ECG measurements	Normal
ECG parameters	Normal
ECG results	Normal
ECG conclusion	Normal
ECG summary	Normal
ECG notes	Normal
ECG comments	Normal
ECG observations	Normal
ECG impressions	Normal
ECG findings	Normal

Date: Tue, 16 Feb 1999 13:23:20 +0900 (JST)
From: Mail Delivery Subsystem <MAILER-DAEMON>
Subject: Return receipt
Message-Id: <199902160423.NAA01411@jupiter.abcdcdb.co.jp>
To: user-d@jupiter.abcdcdb.co.jp
MIME-Version: 1.0
Content-Type: multipart/report; report-type=delivery-status;
boundary="NAA01411.919139000/jupiter.abcdcdb.co.jp"
Auto-Submitted: auto-generated (return-receipt)
X-UIDL: d31657172d7ca5840c19c31b62722f0b
X-winbiff-received-account: jupiter
X-winbiff-flags: Seen

This is a MIME-encapsulated message

-NAA01411.919139000/jupiter.abcdcdb.co.jp
 The original message was received at Tue, 16 Feb 1999 13:22:39+0900 (JST)
 from jupiter.abcdcdb.co.jp [111.222.33.44]

---The follwing addresses bad successful delivery notifications---
walk@jupiter (successfully delivered to mailbox)

-----Transcript of session follows-----

walk@jupiter. Successfully delivered

--NAA01411.919139000/jupiter.abcdcdb.co.jp
Content-Type: message/delivery-status

Reporting-MTA:dns; jupiter.abcdcdb.co.jp
Received-From-MTA: DNS; jupiter.abcdcdb.co.jp
Arrival-Date: Tue, 16 Feb 1999 13:22:39+0900 (JST)

Final-Recipient: RFC822; walk@jupiter
Action: delivered (to mailbox)
Status: 2.1.5
Last-Attempt-Date: Tue, 16 Feb 1999 13:23:20+0900 (JST)
X-Transmitted-NumberOfPage-To-Fax: 5
X-Charge-Information-To-Fax: ¥100

--NAA01411.919139000/jupiter.abcdcdb.co.jp

Content-Type: text/rfc822-headers

Return-Path: <user-d@jupiter.abcdcdb.co.jp>
Received: from host (jupiter.abcdcdb.co.jp [111.222.33.44])
by jupiter.abcdcdb.co.jp (8.9.1/3.7Wjupiter sendmail.cf v8) with ESMTP id NAA01410
for walk@jupiter. Tue. 16 Feb 1999 13:22:39+0900 (JST)

Date: Tue, 16 Feb 1999 13:22:39+0900 (JST)
From: user-d <user-d@jupiter.abcdcdb.co.jp>
Message-Id: <199902160422.NAA01410@jupiter.abcdcdb.co.jp>

--NAA01411.919139000/jupiter.abcdcdb.co.jp

DSN (DELIVERED) MAIL

FIG.9

Date: Tue, 16 Feb 1999 13:25:03 +0900 (JST)
From: Mail Delivery Subsystem <MAILER-DAEMON>
Subject: Returned mail: User unknown
Message-Id: <199902160425.NAA01419@jupiter.abcdcdb.co.jp>
To: user-d@jupiter.abcdcdb.co.jp
MIME-Version: 1.0
Content-Type: multipart/report; report-type=delivery-status;
 boundary="NAA01419.919139103/jupiter.abcdcdb.co.jp"
Auto-Submitted: auto-generated(failure)
X-UIDL: cb1b4451b3b95d56bbc67dc7c462c33d
X-winbiff-received-account: jupiter
X-winbiff-flags: Seen

This is a MIME-encapsulated message

--NAA01419.919139103/jupiter.abcdcdb.co.jp
The original message was received at Tue, 16 Feb 1999 13:23:47+0900 (JST)
from jupiter.abcdcdb.co.jp [111.222.33.44]

-----The following addresses bad permanent fatal errors-----
abc@abcdcdba.co.jp

-----Transcript of session follows-----
..while talking to dsp2.abcdcdba.co.jp.:
>>> RCPT To:<abc@abcdcdba.co.jp>
<<<550<abc@abcdcdba.co.jp>..User unknown
550 abc@abcdcdba.co.jp.. User unknown

--NAA01419.919139103/jupiter.abcdcdb.co.jp
Content-Type:message/delivery-status

Reporting--MTA:dns; jupiter.abcdcdb.co.jp
Received-From-MTA: DNS; jupiter.abcdcdb.co.jp
Arrival-Date: Tue, 16 Feb 1999 13:23:47+0900(JST)

Final-Recipient: RFC822; abc@abcdcdba.co.jp
Action: failed
Status: 5.1.1
Remote-MTA: DNS: dsp2.abcdcdba.co.jp
Diagnostic-Code: SMTP; 550 <abc@abcdcdba.co.jp>..User unknown
Last-Attempt-Date: Tue, 16 Feb 1999 13:25:03+0900 (JST)

--NAA01419.919139103/jupiter.abcdcdb.co.jp
Content-Type: message/rfc822

ATTACHED MESSAGE
--NAA01419.919139103/jupiter.abcdcdb.co.jp

DSN (FAILED) MAIL

009060"4T495950

FIG.10A

Date: Tue, 16 Feb 1999 13:41:13+0900
From: user-d@abcddcba.co.jp
Message-ID: <36C8F6E9.39C6DC2F@abcddcba.co.jp>
Subject: Return Receipt (displayed)-test
To: user-d@jupiter.abcdcdb.co.jp
References: <19990216134143N.user-d@abcddcba.co.jp>
MIME-Version: 1.0
Content-Type: multipart/report: report-type=disposition-notification;
 boundary="-----mdn97D5884EAE879BD0C9F642A9"
X-UIDL: c56bf5fb9c1b735902cfb990613c74d1
X-winbiff-received-account:jupiter
X-winbiff-flags:Seen

-----mdn97D5884EAE879BD0C9F642A9
Content-Type: text/plain; charset=iso-2022-jp
Content-Transfer-Encoding: 7bit

This is a Return Receipt for the mail that you sent to
user-d@abcddcba.co.jp.

Note: this Return Receipt only acknowledges that the message was
displayed on the recipient's machine. There is no guarantee that the
content has been read or understood.

-----mdn97D5884EAE879BD0C9F642A9
Content-Type: message/disposition-notification; name="MDNPart2.txt"
Content-Disposition: inline
Content-Transfer-Encoding: 7bit

Reporting-UA: tulip.abcddcba.co.jp; Mozilla 4.5 [ja] (Win95;1)
Final-Recipient: rfc822; user-d@abcddcba.co.jp
Original-Message-ID: <19990216134143N.user-d@abcddcba.co.jp>
Disposition: manual-action/MDN-sent-manually; displayed
X-Transmitted-NumberOfPage-To-Fax: 5
X-Charge-Information-To-Fax: ¥100

===== (CONTINUED) =====

MDN (DISPLAYED) MAIL

009060"4149960

FIG.10B

===== (CONTINUED) =====

-----mdn97D5884EAE879BD0C9F642A9

Content-Type: text/rfc822-headers; name="MDNPart3.txt"

Content-Transfer-Encoding: 7bit

Content-Disposition: inline

Received: from lily.abcdcdba.co.jp(lily.abcdcdba.co.jp
[111.222.33.55])

by jupiter.abcdcdb.co.jp (8.9.1/3.7Wjupiter sendmail-cf v8) with
SMTP id NAA01448

for <nwm@jupiter.abcdcdb.co.jp>; Tue, 16 Feb 1999 13:44:04+0900
(JST)

Received: from localhost by lily-abcdcdba.co.jp
(5.67+1.6W/2.8Wb-91Jan07)

id AA01425; Tue, 16 Feb 99 13:41:44 JST

To: nwm@jupiter.abcdcdb.co.jp

Subject: test

Disposition-Notification-To: user-d@jupiter.abcdcdb.co.jp

X-Mailer: Mew version 1.93 on Emacs 19.28 / Mule 2.3 (SUETSUMUHANA)

Mime-Version: 1.0

Content-Type: Text/Plain; charset=us-ascii

Content-Transfer-Encoding: 7bit

Message-Id: <19990216134143N.user-d(@abcdcdba.co.jp>

Date: Tue, 16 Feb 1999 13:41:43+0900

From: user-d <user-d@abcdcdba.co.jp>

X-Dispatcher: input version 980905 (IM100)

Lines: 1

X-UIDL: 8614c297fa493494f978b1193317e40e

-----mdn97D5884EAE879BD0C9F642A9-

MDN (DISPLAYED) MAIL (CONTINUED)

009060"41495950

FIG.11A


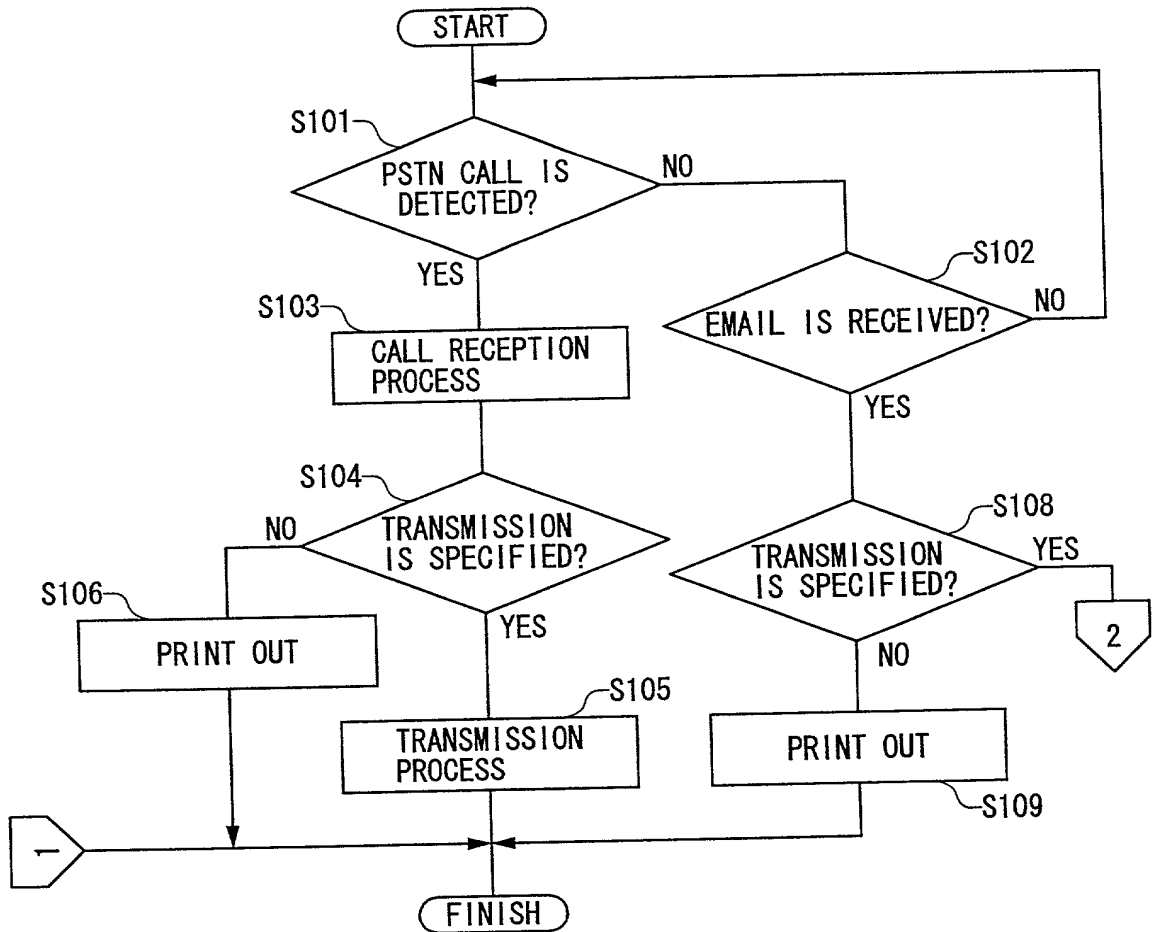


FIG.11B

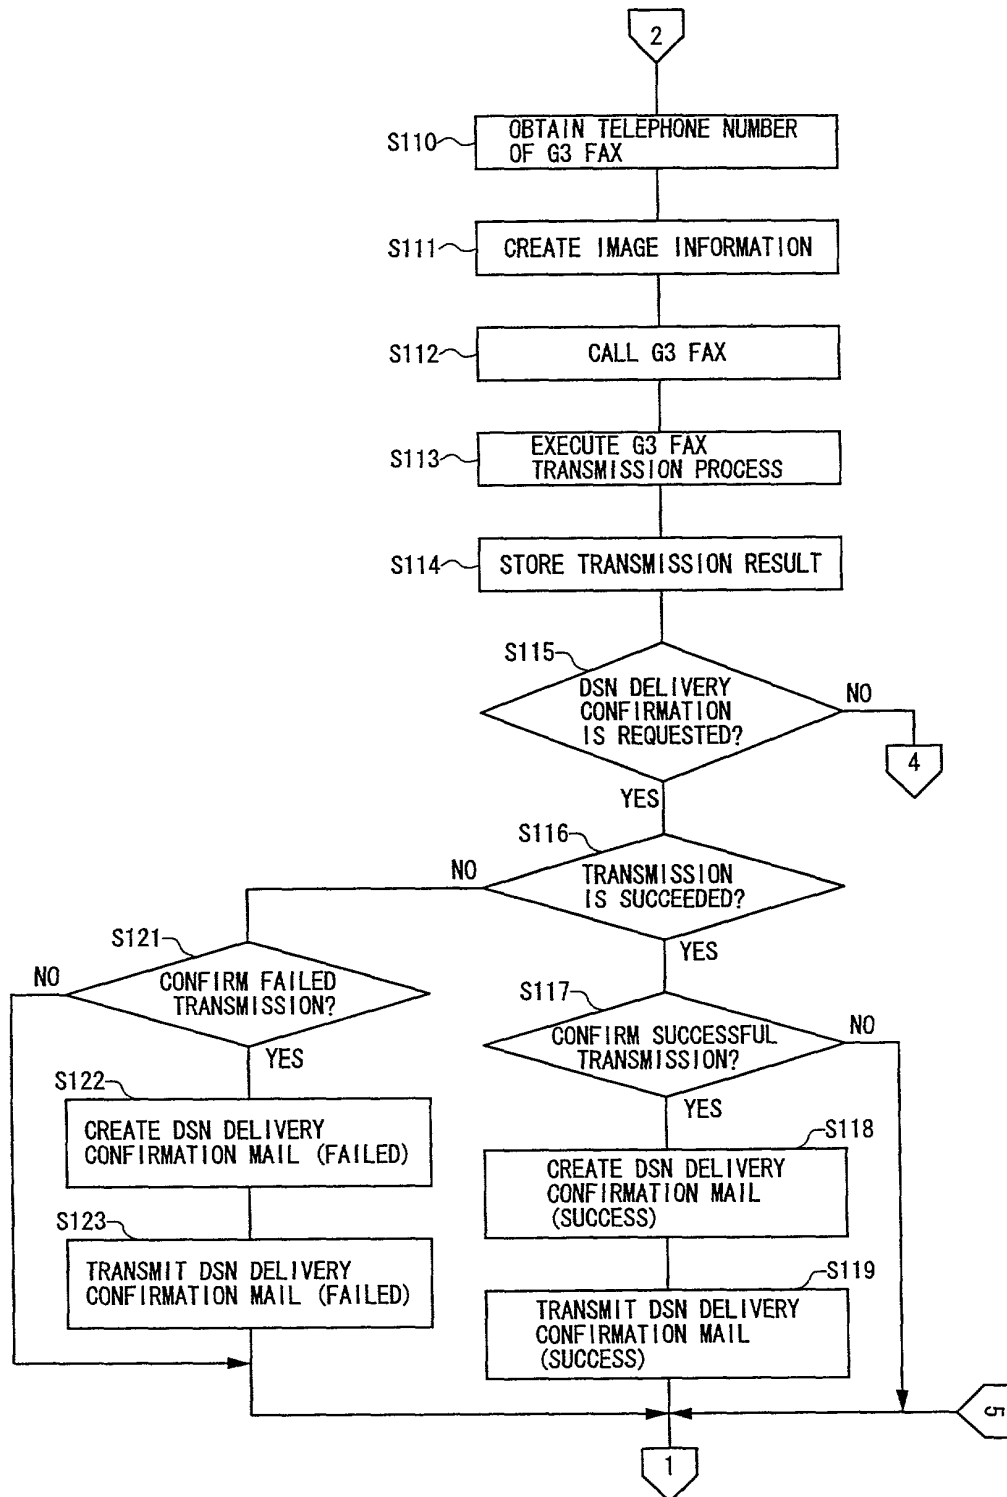

009060"44-090600

FIG.11C

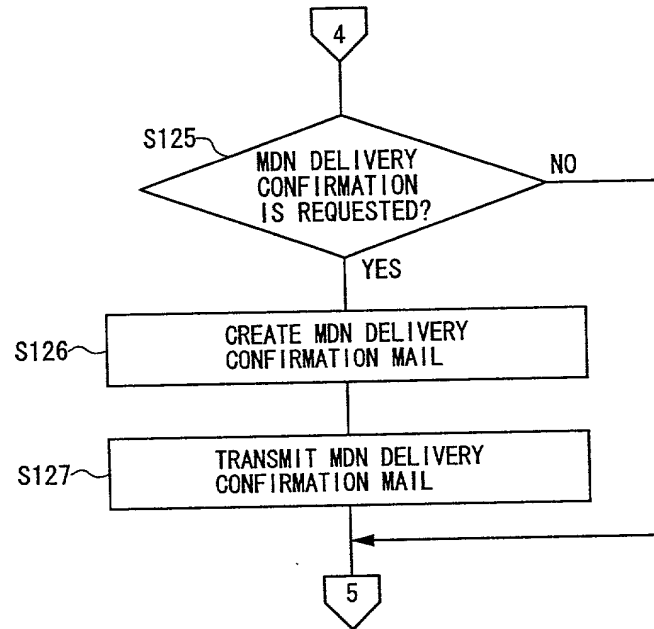


FIG.12

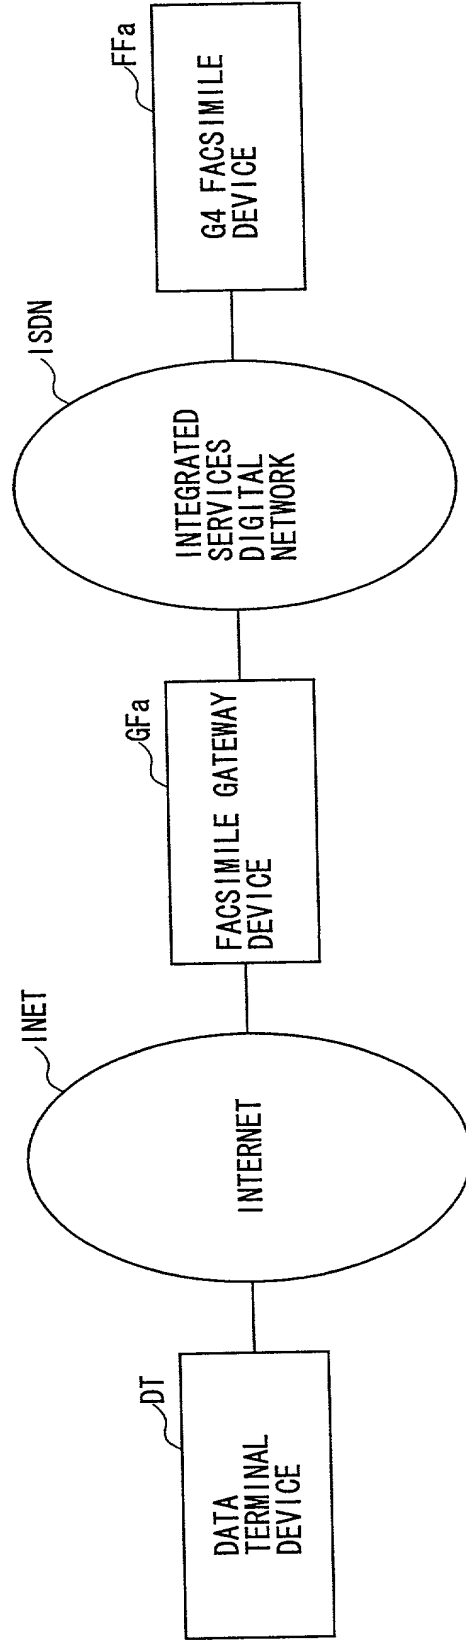


FIG.13

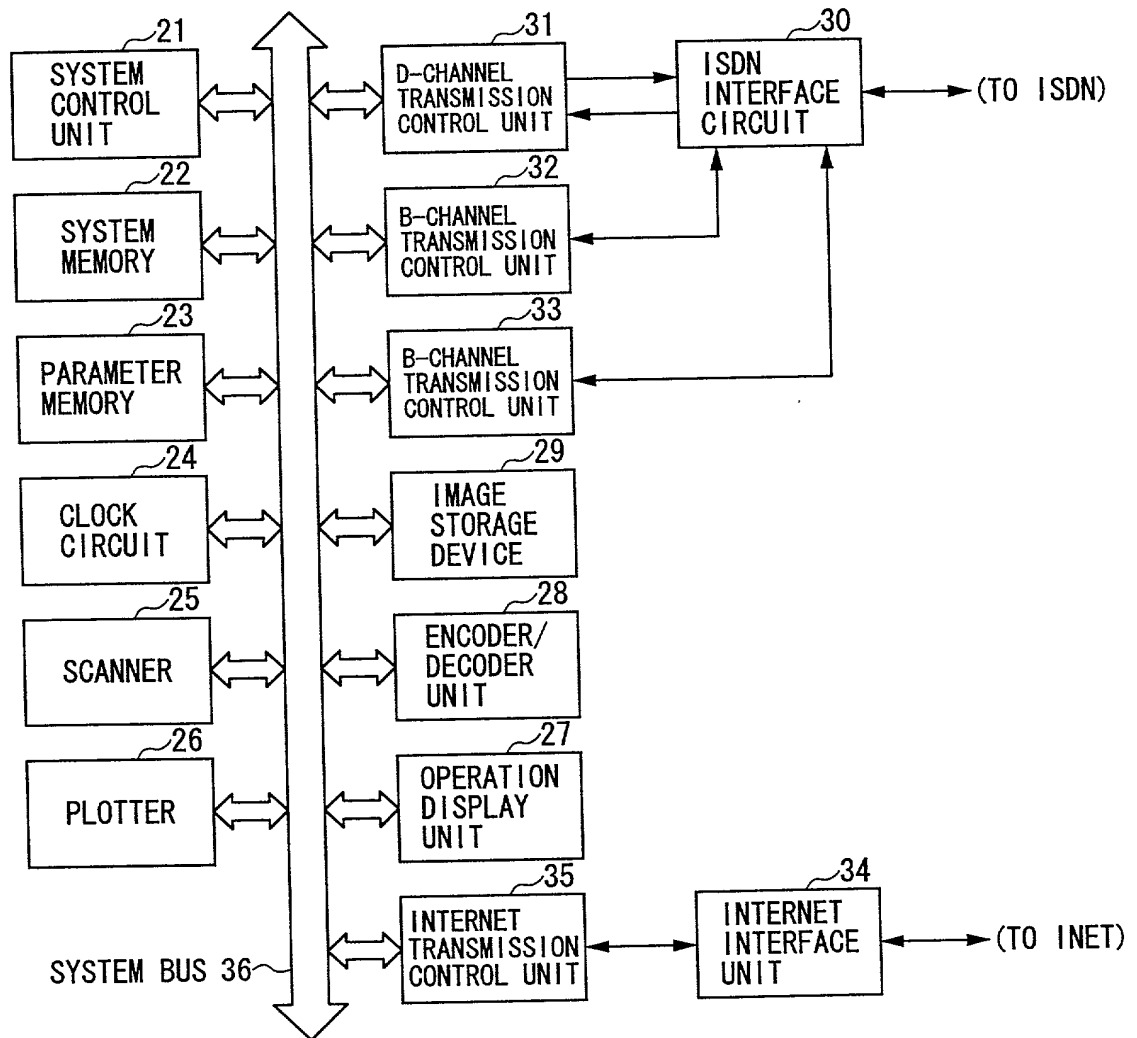


FIG.14


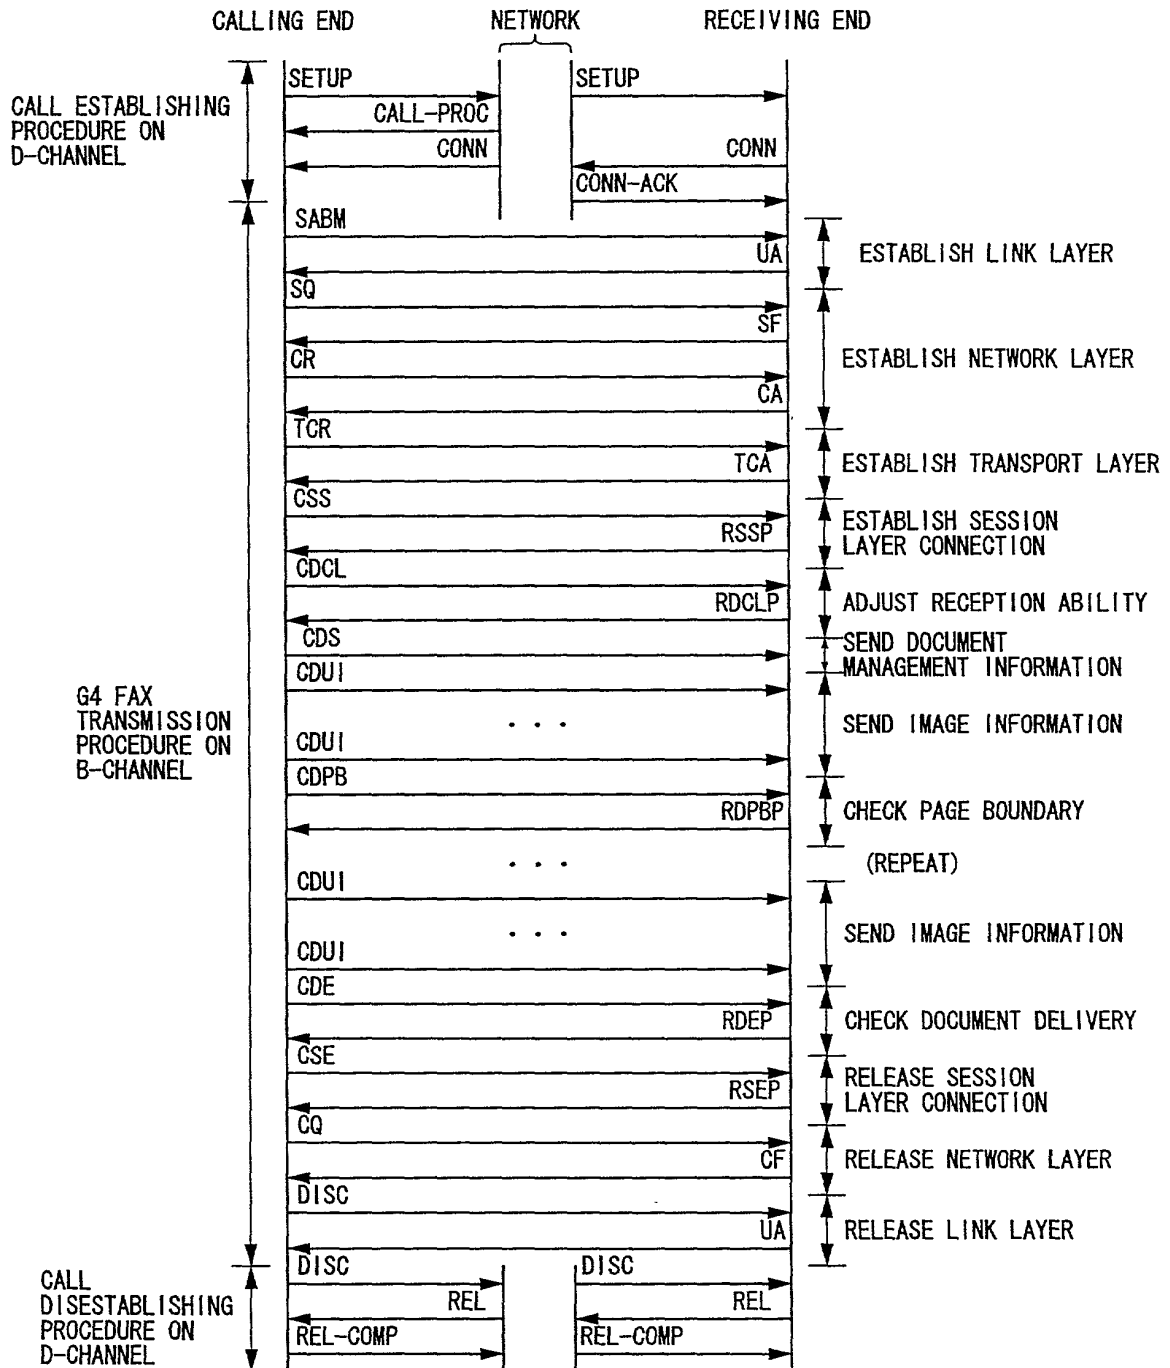


FIG.15A

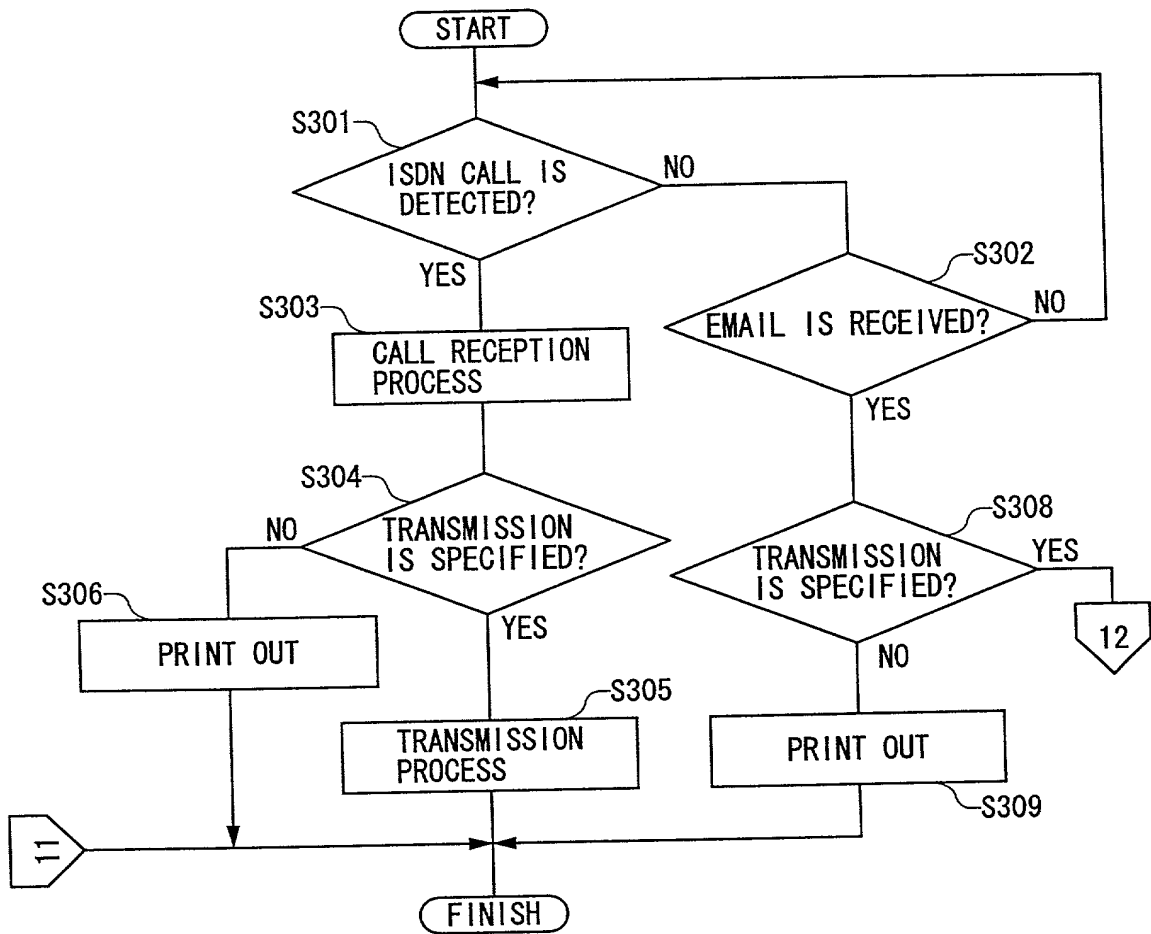

009060"4T495960

FIG. 15B


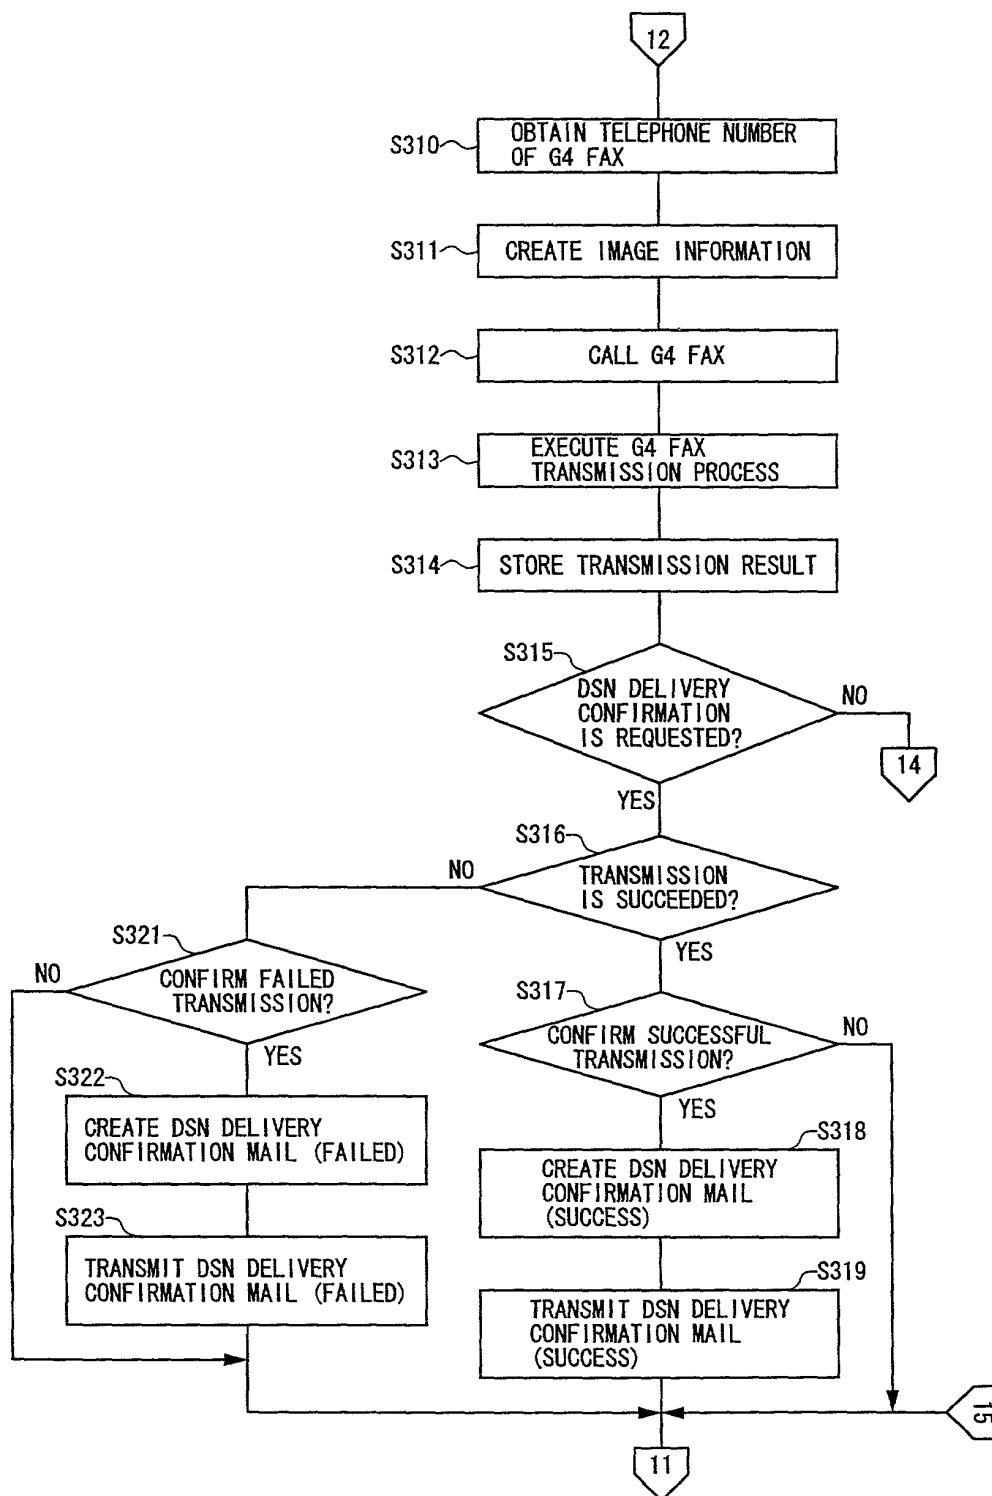


FIG.15C

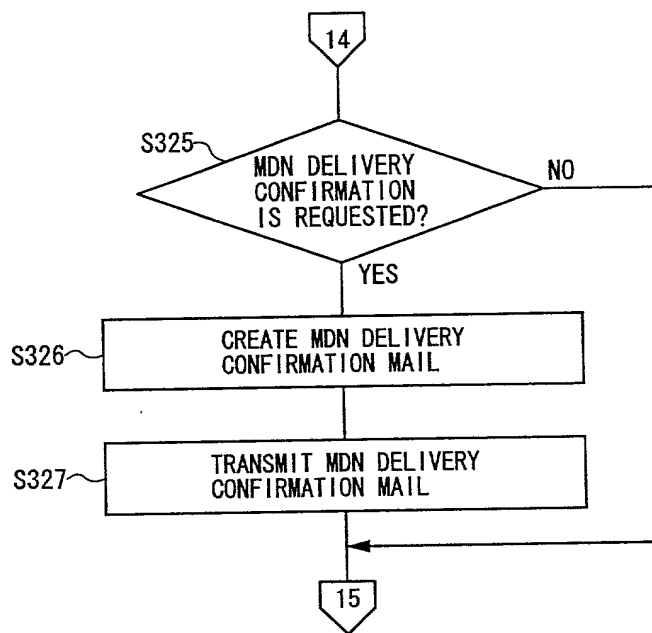

009060"4T49550

FIG.16A

RECEPTION ABILITY INFORMATION #1

RECEPTION ABILITY INFORMATION #m

(RECEPTION ABILITY TABLE)

FIG.16B

TELEPHONE NUMBER
RECEPTION ABILITY

(RECEPTION ABILITY INFORMATION)

009060"445960

FIG.17

Date: Tue, 16 Feb 1999 13:23:20+0900 (JST)
From: Mail Delivery Subsystem <MAILER-DAEMON>
Subject: Return receipt
Message-Id: <199902160423.NAA01411@jupiter.abcdcdcb.a.co.jp>
To: user-d@jupiter.abcdcdcb.a.co.jp
MIME-Version: 1.0
Content-Type: multipart/report; report-type=delivery-status;
boundary="NAA01411.919139000/jupiter.abcdcdcb.a.hor.co.jp"
Auto-Submitted: auto-generated (return-receipt)

This is a MIME-encapsulated message

--NAA01411.919139000/jupiter.abcdcdcb.a.hor.co.jp
The original message was received at Tue, 16 Feb 1999 13:22:39+0900(JST)
from jupiter.abcdcdcb.a.hor.co.jp [111.222.33.44]

---The following addresses had successful delivery notifications---
Fax=+81-3-9876-5432@jupiter.(Successfully dispatched)

-----Transcript of session follows-----
Fax=+81-3-9876-5432@jupiter...Successfully dispatched

--NAA01411.919139000/jupiter.abcdcdcb.a.co.jp
Content-Type: message/delivery-status

Reporting--MTA:dns; jupiter.abcdcdcb.a.hor.co.jp
Received-From-MTA: DNS: jupiter.abcdcdcb.a.hor.co.jp
Arrival-Date; Tue, 16 Feb 1999 13:22:39+0900(JST)

Final-Recipient: RFC822; Fax=+81-3-9876-5432@jupiter
Action:dispatched
Status: 2.0.0
Last-Attempt-Date:Tue, 16 Feb 1999 13:23:20+0900(JST)
Media-Accept-Features: (& (color-Binary)(image-file-structure=[TIFF-S])
(| (& (dpi=200) (dpi-xratio=200/100)) (& (dpi=200)(dpi-xratio=1))))
(image-coding=[MII,MR,MMR])(MRC-mode=0)(paper-size=[A4,B4]))

X-G3Fax-JM: V.34,V.17,V.29,V.27ter
X-G3Fax-INTERNET: T.37 simple mode
X-G3Fax-CSA: kilo@medaka.pole.co.jp
X-G3Fax-NSF: 000000004176ca8c7b99038ccf3aa3231488776f5ccb

--NAA01411.919139000/jupiter.abcdcdcb.a.hor.co.jp
Content-Type: text/rfc822-headers

Return-Path: <user-d@jupiter.abcdcdcb.a.hor.co.jp>
Received: from host (jupiter.abcdcdcb.a.hor.co.jp [111.222.33.44])
by jupiter.abcdcdcb.a.hor.co.jp (8.9.1/3.7Wjupiter sendmail-cf v8) with ESMTP id NAA01410
for Fax=+81-3-9876-5432@jupiter, Tue, 16 Feb 1999 13:22:39+0900 (JST)
Date: Tue, 16 Feb 1999 13:22:39+0900 (JST)
From: Full Name <user-d@jupiter.abcdcdcb.a.hor.co.jp>
Message-Id: <199902160422.NAA01410@jupiter.abcdcdcb.a.hor.co.jp>

--NAA01411.919139000/jupiter.abcdcdcb.a.hor.co.jp-----

DSN MAIL (WITH RECEPTION ABILITY)

009060"4T495950

FIG.18

Date: Tue, 16 Feb 1999 13:41:13+0900
From: Fax-Gateway@jupiter.abcdcdcb.hor.co.jp
Message-ID: <36C8F6E9.39C6DC2F@jupiter.abcdcdcb.hor.co.jp>
Subject: Return Receipt (dispatched)-test
To: user-d@jupiter.abcdcdcb.hor.co.jp
References: <19990216134143N.user-d@mie.hor.co.jp>
MIME-Version: 1.0
Content-Type: multipart/report; report-type=disposition-notification;
boundary="-----mdn97D5884EAE879BD0C9F642A9"

-----mdn97D5884EAE879BD0C9F642A9
Content-Type: text/plain; charset=iso-2022-jp
Content-Transfer-Encoding: 7bit

This is a Return Receipt for the mail that you sent to
user-d@jupiter.abcdcdcb.hor.co.jp.

Note: this Return Receipt only acknowledges that the message was
sent to the recipient's machine. There is no guarantee th at the
content has been read or understood.

-----mdn97D5884EAE879BD0C9F642A9
Content-Type: message/disposition-notification;
Content-Disposition: inline
Content-Transfer-Encoding: 7bit

Reporting-UA: jupiter.abcdcdcb.hor.co.jp; Jupiter.Gateway
Final-Recipient: RFC822; Fax=+81-3-9876-5432@jupiter
Original-Message-ID: <19990216134143N.user-d@jupiter.abcdcdcb.hor.co.jp>
Disposition: manual-action/MDN-sent-manually: dispatched
Media-Accept-Features: (& (color=Binary)(image-file-structure=[TIFF-S])
(! & (dpi=200) (dpi-xratio=200/100)) (& (dpi=200) (dpi-xratio=1)))
(image-coding=[MH,MR,MMR])(MRC-mode=0) (paper-size=[A4,B4]))
X-G3Fax-JM: V.34,V.17,V.29,V.27ter
X-G3Fax-INTERNET: T.37 simple mode
X-G3Fax-CSA: naka@medaka.pole.co.jp
X-G3Fax-NSF: 000000004f76ca8c7b99038ccf3aa.3231488776f5ccb


-----mdn97D5884EAE879BD0C9F642A9
Content-Type: text/rfc822-headers;
Content-Transfer-Encoding: 7bit
Content-Disposition: inline

Received: from lily abcdcdcb.hor.co.jp (jupiter.abcdcdcb.hor.co.jp[111.222.33.55])
by jupiter.abcdcdcb.hor.co.jp (8.9.1/3.7Wjupiter sendmail.cf v8) with SMTP id NAA01448
for <Fax=+81-3-9876-5432@jupiter.abcdcdcb.hor.co.jp>; Tue, 16 Feb 1999 13:44:04+0900(JST)
Received: from localhost by jupiter.abcdcdcb.hor.co.jp (8.9.1/3.7Wjupiter sendmail.cf v8)
id AA01425; Tue, 16 Feb 99 13:41:44 JST
To: Fax=+81-3-9876-5432@jupiter.abcdcdcb.hor.co.jp
Subject: test
Disposition-Notification-To: user-d@jupiter.abcdcdcb.hor.co.jp
Message-Id: <19990216134143N.user-d@jupiter.abcdcdcb.hor.co.jp>
Date: Tue, 16 Feb 1999 13:41:43+0900
From: Hiroshi User-d <user-d@jupiter.abcdcdcb.hor.co.jp>

-----mdn97D5884EAE879BD0C9F642A9-----


MDN MAIL (WITH RECEPTION ABILITY)

FIG.19A

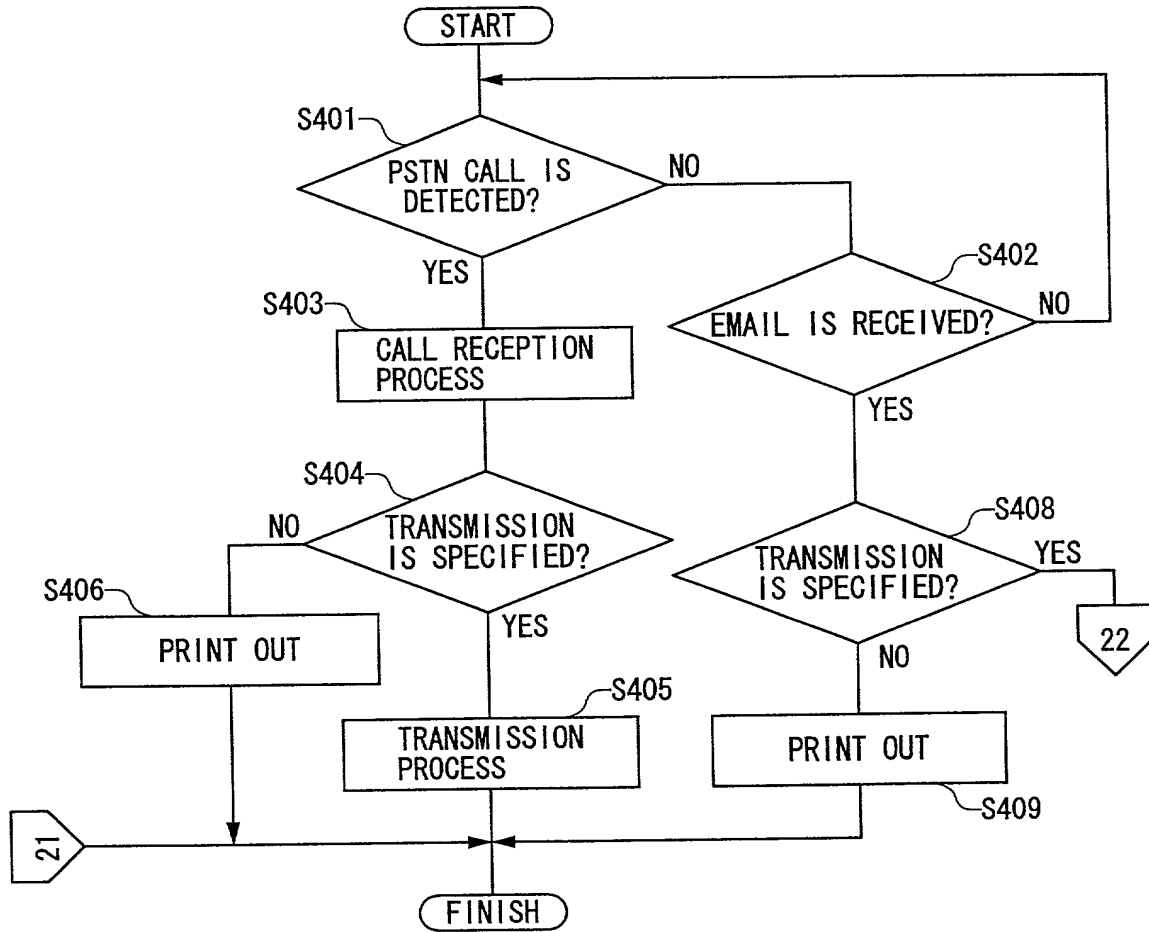

000000"4749550

FIG.19B

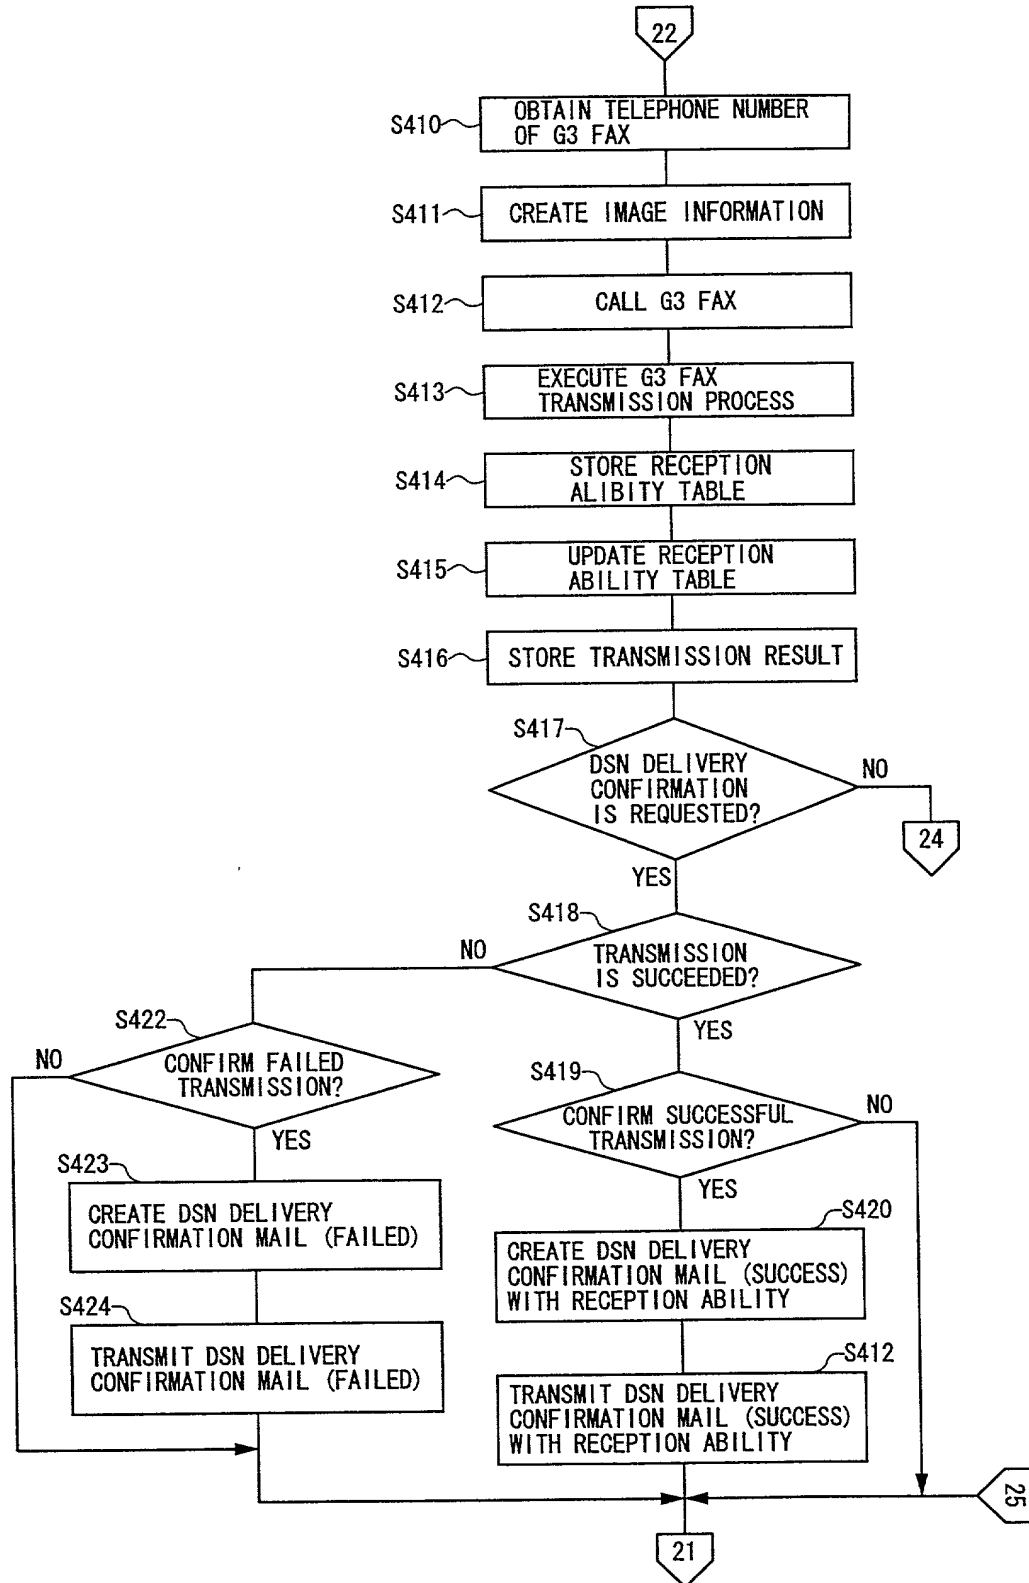

096644-090600

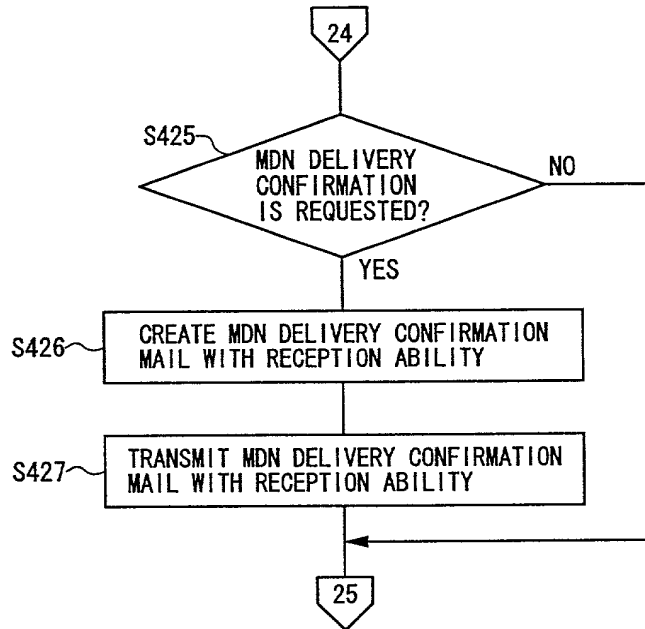
[illegible]

FIG.20A


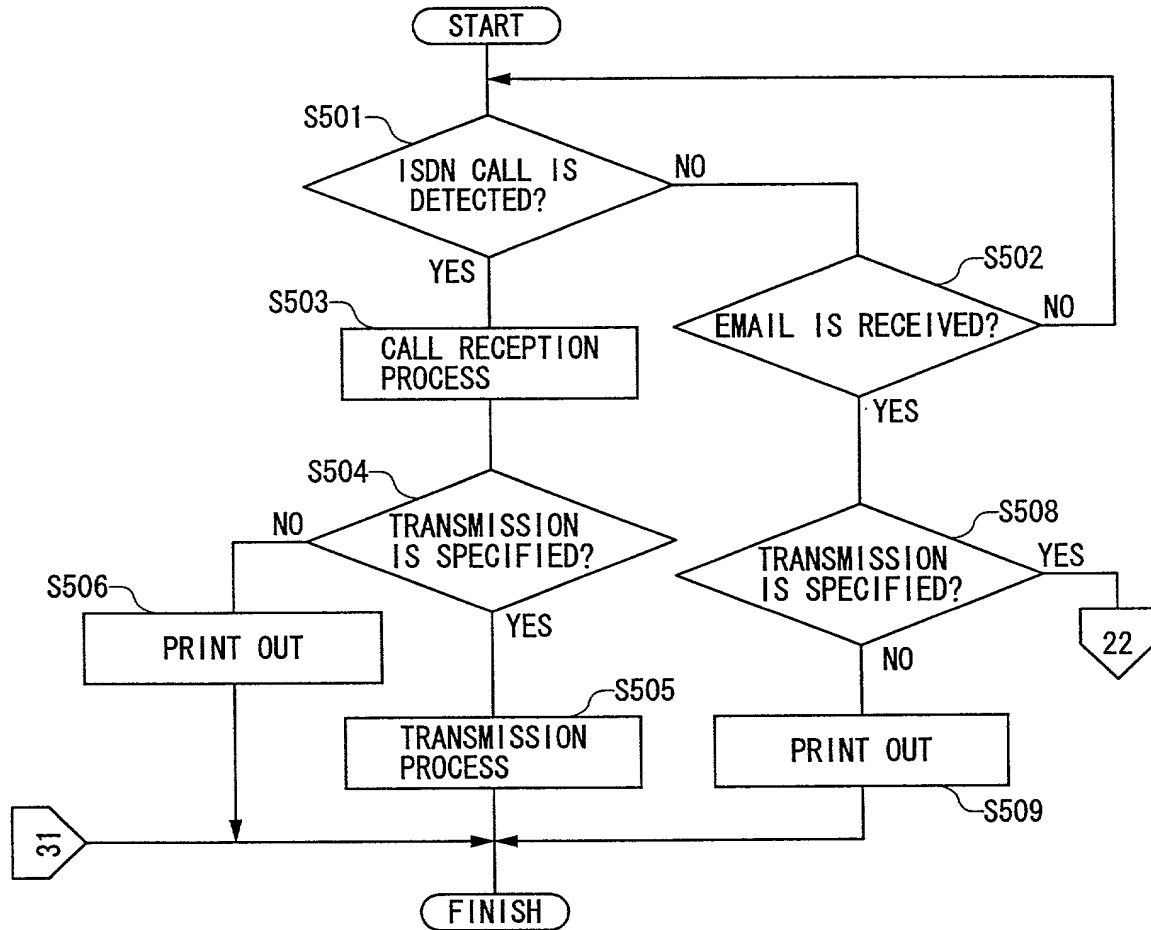


FIG.20B

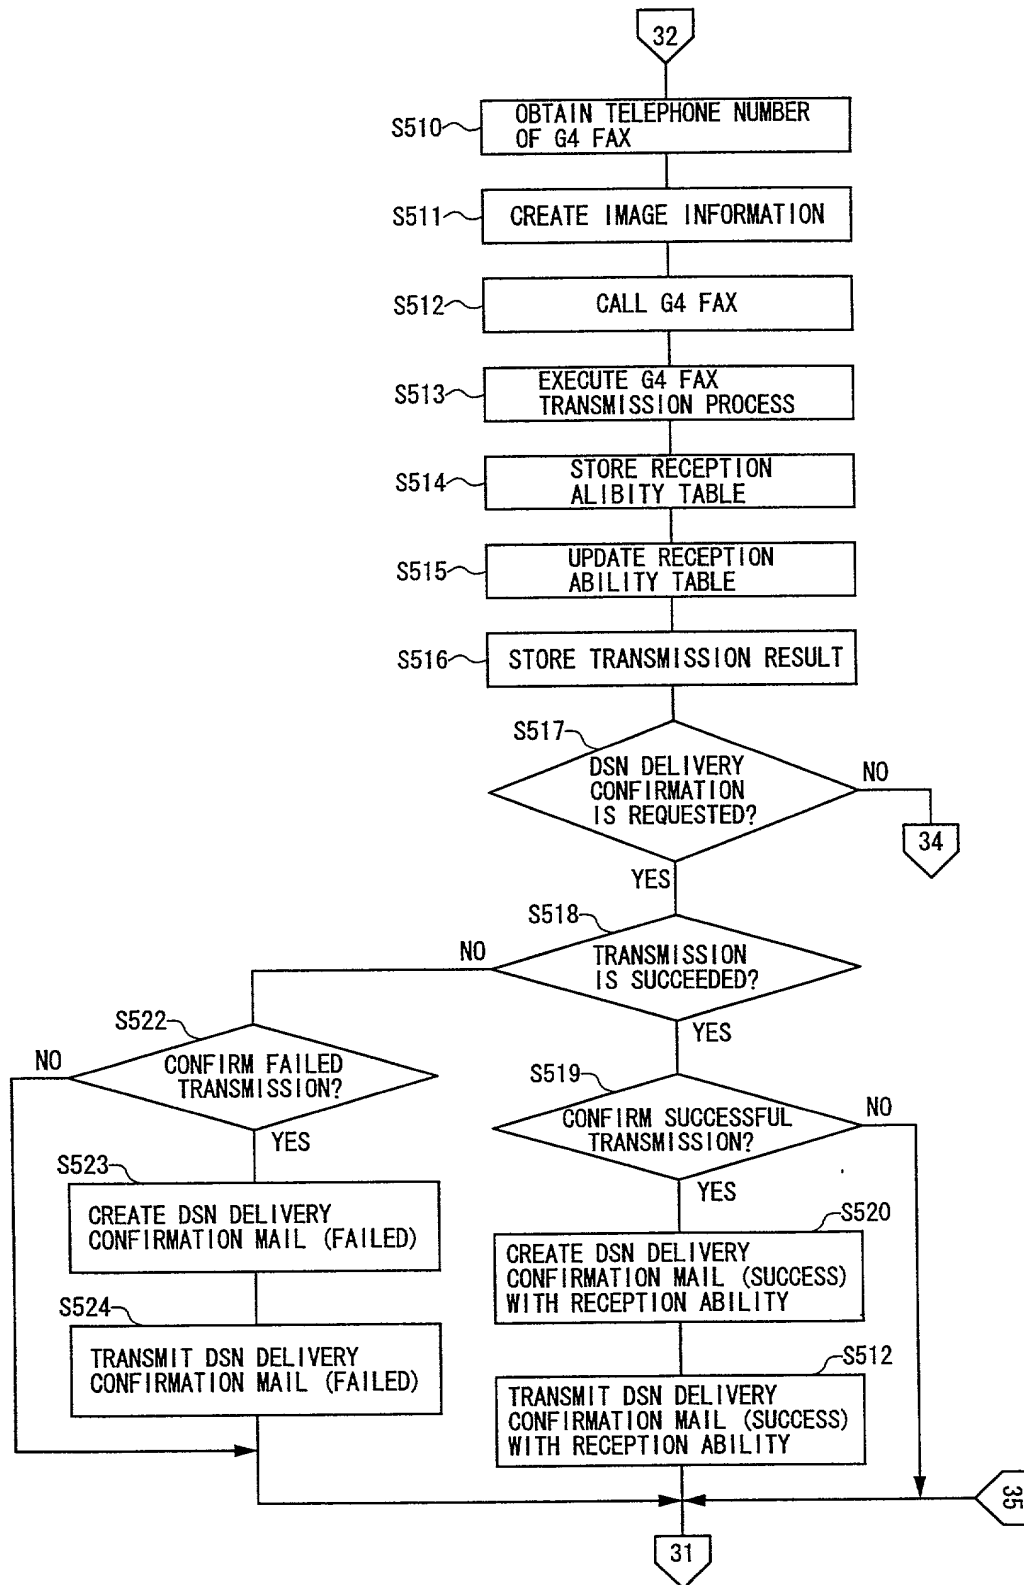

009060"495950

1. The first part of the document discusses the importance of maintaining accurate records of all transactions and the role of the accounting department in ensuring the integrity of the financial statements.

2. The second part of the document outlines the various methods used to collect and analyze data, including surveys, interviews, and focus groups.

3. The third part of the document describes the results of the research, highlighting the key findings and the implications for the organization.

4. The fourth part of the document provides a detailed analysis of the data, including a comparison of the results with previous studies and a discussion of the limitations of the research.

5. The fifth part of the document offers recommendations for future research and suggests ways in which the organization can improve its performance based on the findings.

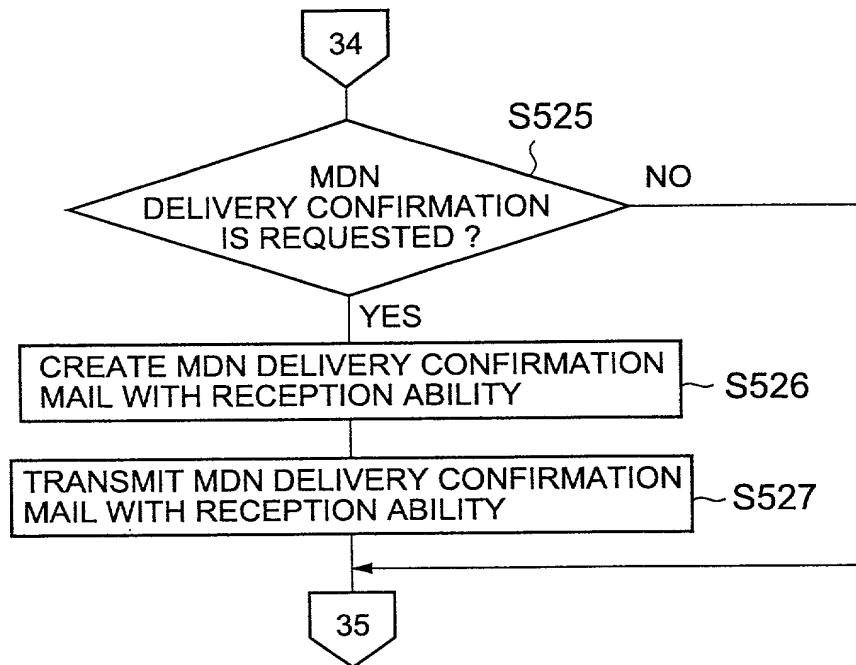


FIG. 21

Date: Tue, 16 Feb 1999 13:23:20 +0900 (JST)
From: Mail Delivery Subsystem <MAILER-DAEMON>
Subject: Return receipt
Message-Id: <199902160423.NAA01411@jupiter.mie.hor.co.jp>
To: user-d@jupiter.abcdcdcbahor.co.jp
MIME-Version: 1.0
Content-Type: multipart/report; report-type=delivery-status;
boundary="NAA01411.919139000/jupiter.abcdcdcbahor.co.jp"
Auto-Submitted: auto-generated(return-receipt)

```
--NAA01411.919139000/jupiter.abcdcdba.co.jp
```

Fax=046-999-9999@jupiter (successfully relayed to fax)

--NAA01411.919139000/jupiter.abcdcdba.hor.co.jp
Content-Type: message/delivery-status

Reporting-MTA: dns;server abcdcdba.hor.co.jp
Received-From-MTA: DNS; server.abcdcdba.hor.co.jp
Arrival-Date: Tue, 16 Feb 1999 13:22:39+0900(JST)

Final-Recipient:RFC822; MAILER-DAEMON@abcddcba.hor.co.jp
Action:relayed
Status: 2.0.0

--NAA01411.919139000/jupiter.abcd dcba.hor.co.jp----

DSN (RELAYED) MAIL

FIG.22

Date: Tue, 16 Feb 1999 13:41:13+0900
From: Mail Delivery Subsystem <MAILER-DAEMON>
Message-ID: <36C8F6E9.39C6DC2F@abcddcba.hor.co.jp>
Subject: Return Receipt
To: user-d@jupiter.abcddcba.hor.co.jp
References: <19990216134143N.user-d@abcddcba.hor.co.jp>
MIME-Version: 1.0
Content-Type: multipart/report; report-type=disposition-notification;
 boundary="-----mdn97D5884EAE879BD0C9F642A9"

-----mdn97D5884EAE879BD0C9F642A9
Content-Type: text/plain; charset=iso-2022-jp
Content-Transfer-Encoding: 7bit

FAX=046-999-9999@abcddcba.hor.co.jp (successfully dispatched to fax)

-----mdn97D5884EAE879BD0C9F642A9
Content-Type: message/disposition-notification;
Content-Disposition: inline
Content-Transfer-Encoding: 7bit

Reporting-UA: server.abcddcba.hor.co.jp;
Final-Recipient: rfc822; MAILER-DAEMON@abcddcba.hor.co.jp
Original-Message-ID: <19990216134143N.user-d@abcddcba.hor.co.jp>
Disposition: manual-action/MDN-sent-manually; dispatched

-----mdn97D5884EAE879BD0C9F642A9--

MDN (DISPATCHED) MAIL

FIG.23

Date: Tue. 16 Feb 1999 13:23:20 +0900 (JST)
From: Mail Delivery Subsystem <MAILER-DAEMON>
Subject: Return receipt
Message-ID: <199902160423.NAA01411@jupiter.abcdcdcb.hor.co.jp>
To: user-d@jupiter.abcdcdcb.hor.co.jp
MIME-Version: 1.0
Content-Type: multipart/report; report-type=delivery-status;
boundary="NAA01411.919139000/jupiter.abcdcdcb.hor.co.jp"
Auto-Submitted: auto-generated (return-receipt)

--NAA01411.919139000/jupiter.abcdcdcb.hor.co.jp

FAX=046-999-9999(G3fax-signal MCFs was responded for the whole pages.)

--NAA01411.919139000/jupiter.abcdcdcb.hor.co.jp
Content-Type: message/delivery-status

Reporting-MTA: dns; server.abcdcdcb.hor.co.jp
Received-From-MTA: DNS; jupiter.abcdcdcb.hor.co.jp
Arrival-Date: Tue, 16 Feb 1999 13:22:39f0900 (JST)

Final-Recipient: RFC822; Fax=046-999-9999@jupiter
Action: delivered
Status: 2.0.0

--NAA01411.919139000/jupiter.abcdcdcb.hor.co.jp----

DSN (DELIVERED) MAIL

FIG.24

Date: Tue, 16 Feb 1999 13:41:13+0900
From: Mail Delivery Subsystem <MAILER-DAEMON>
Message-ID: <36C8F6E9.39C6DC2F@abcddcba.hor.co.jp>
Subject: Return Receipt
To: user-d@jupiter.abcddcba.hor.co.jp
References: <19990216134143N.user-d@abcddcba.hor.co.jp>
MIME-Version: 1.0
Content-Type: multipart/report; report-type=disposition-notification;
boundary="-----mdn97D5884EAE879BD0C9F642A9"

-----mdn97D5884EAE879BD0C9F642A9

Content-Type: text/plain; charset=iso-2022-jp
Content-Transfer-Encoding: 7bit

FAX=046-999-9999(G3fax-signal MCFs was responded for the whole pages.)

-----mdn97D5884EAE879BD0C9F642A9

Content-Type: message/disposition-notification
Content-Disposition: inline
Content-Transfer-Encoding: 7bit

Reporting-UA: server.abcddcba.hor.co.jp;
Final-Recipient: rfc822; Fax=046-999-9999@jupiter
Original-Message-ID: <19990216134143N.user-d@abcddcba.hor.co.jp>
Disposition: manual-action/MDN-sent-manually; dispatched

-----mdn97D5884EAE879BD0C9F642A9--

MDN (DISPLAYED) MAIL

[illegible]

--NAA01419.919139103/jupiter.abcdcdba.hor.co.jp--

DSN (FAILED) MAIL

FIG.26

Date: Tue, 16 Feb 1999 13:25:03+0900 (JST)
From: Mail Delivery Subsystem <MAILER-DAEMON>
Subject: Return Receipt
Message-Id: <199902160425.NAA01419@jupiter.abcdcdcb.hor.co.jp>
To: user-d@jupiter.abcdcdcb.hor.co.jp
MIME-Version: 1.0
Content-Type: multipart/report; report-type=delivery-status;
 boundary="NAA01419.919139103/jupiter.abcdcdcb.hor.co.jp"
Auto-Submitted: auto-generated (failure)

--NAA01419.919139103/jupiter.abcdcdcb.hor.co.jp

FAX=046-999-9999(G3fax-signal MCFs was not responded for some pages.)

--NAA01419.919139103/jupiter.abcdcdcb.hor.co.jp
Content-Type: message/delivery-status

Reporting-MTA: dns; server.abcdcdcb.hor.co.jp
Received-From-MTA: DNS; jupiter.abcdcdcb.hor.co.jp
Arrival-Date: Tue, 16 Feb 1999 13:23:47+0900 (JST)

Final-Recipient: RFC822; Fax=046-999-9999@jupiter
Action: failed
Status: 5.0.0
Remote-MTA: DNS; server.abcdcdcb.hor.co.jp
Diagnostic-Code: SMTP; 554 Transaction failed <Fax=046-999-9999>

--NAA01419.919139103/jupiter.abcdcdcb.hor.co.jp--

MDN (FAILED) MAIL

009060"4749560

FIG.27A



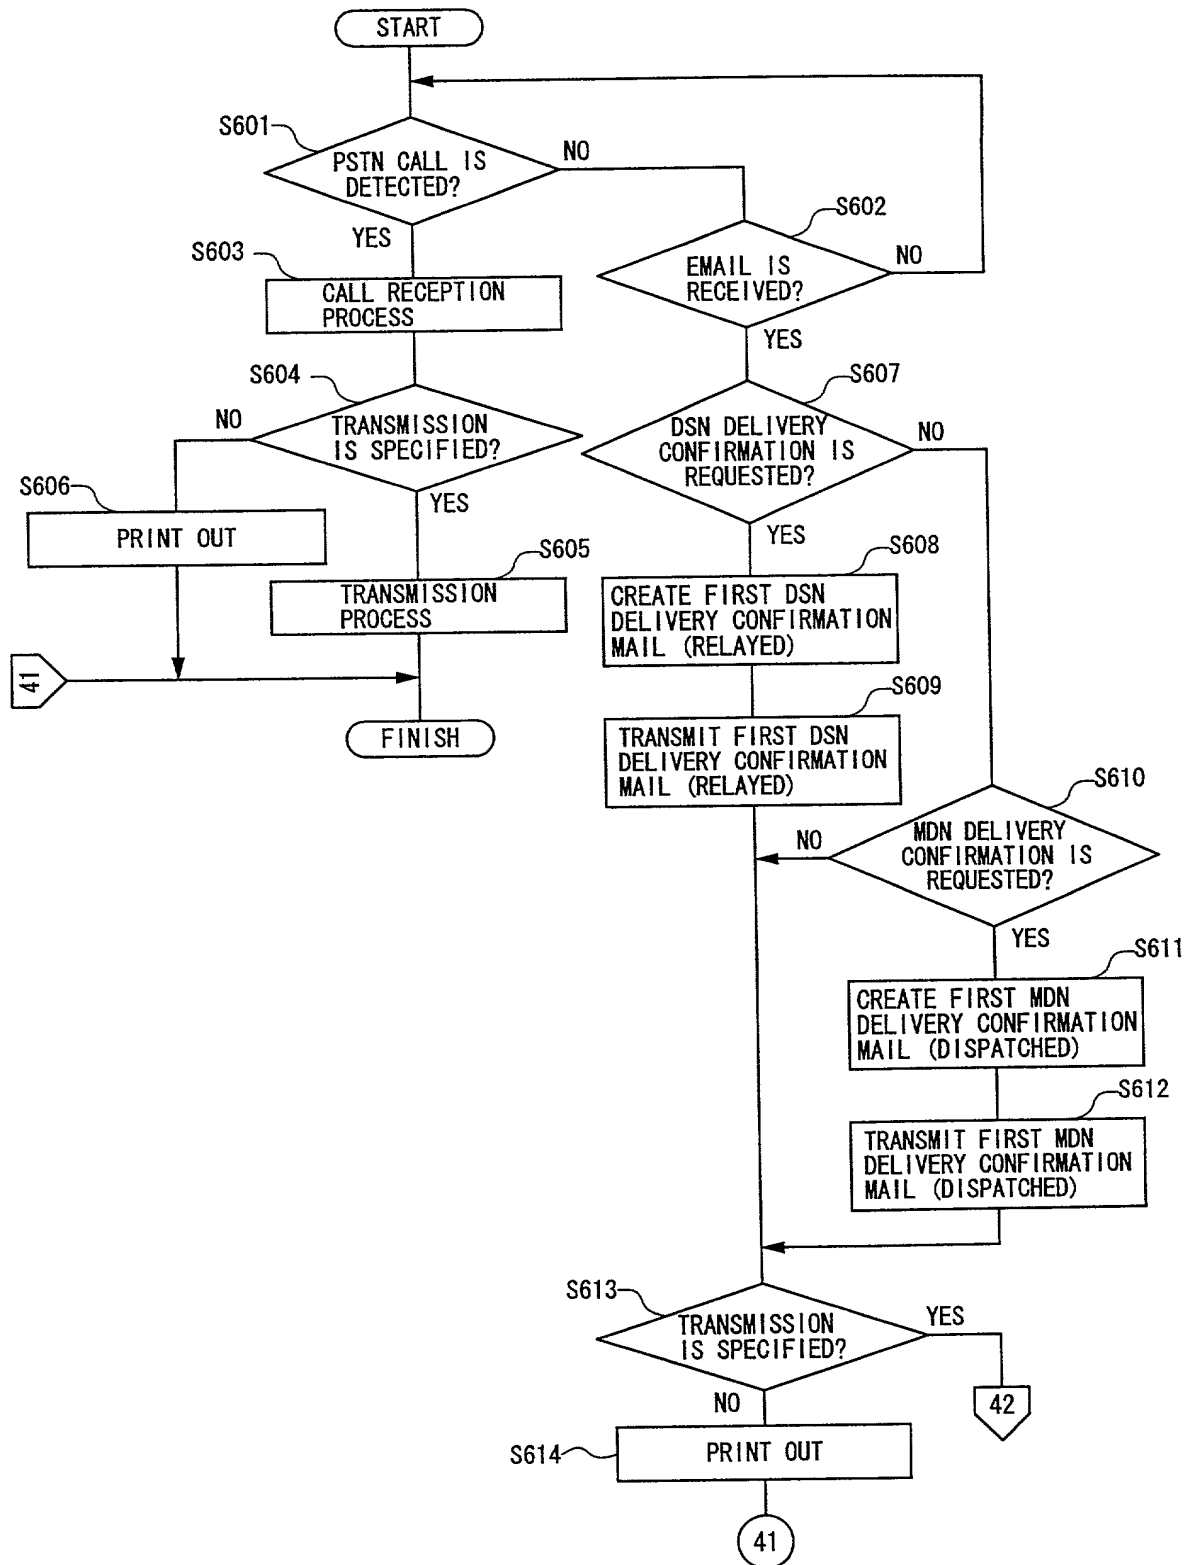


FIG.27B

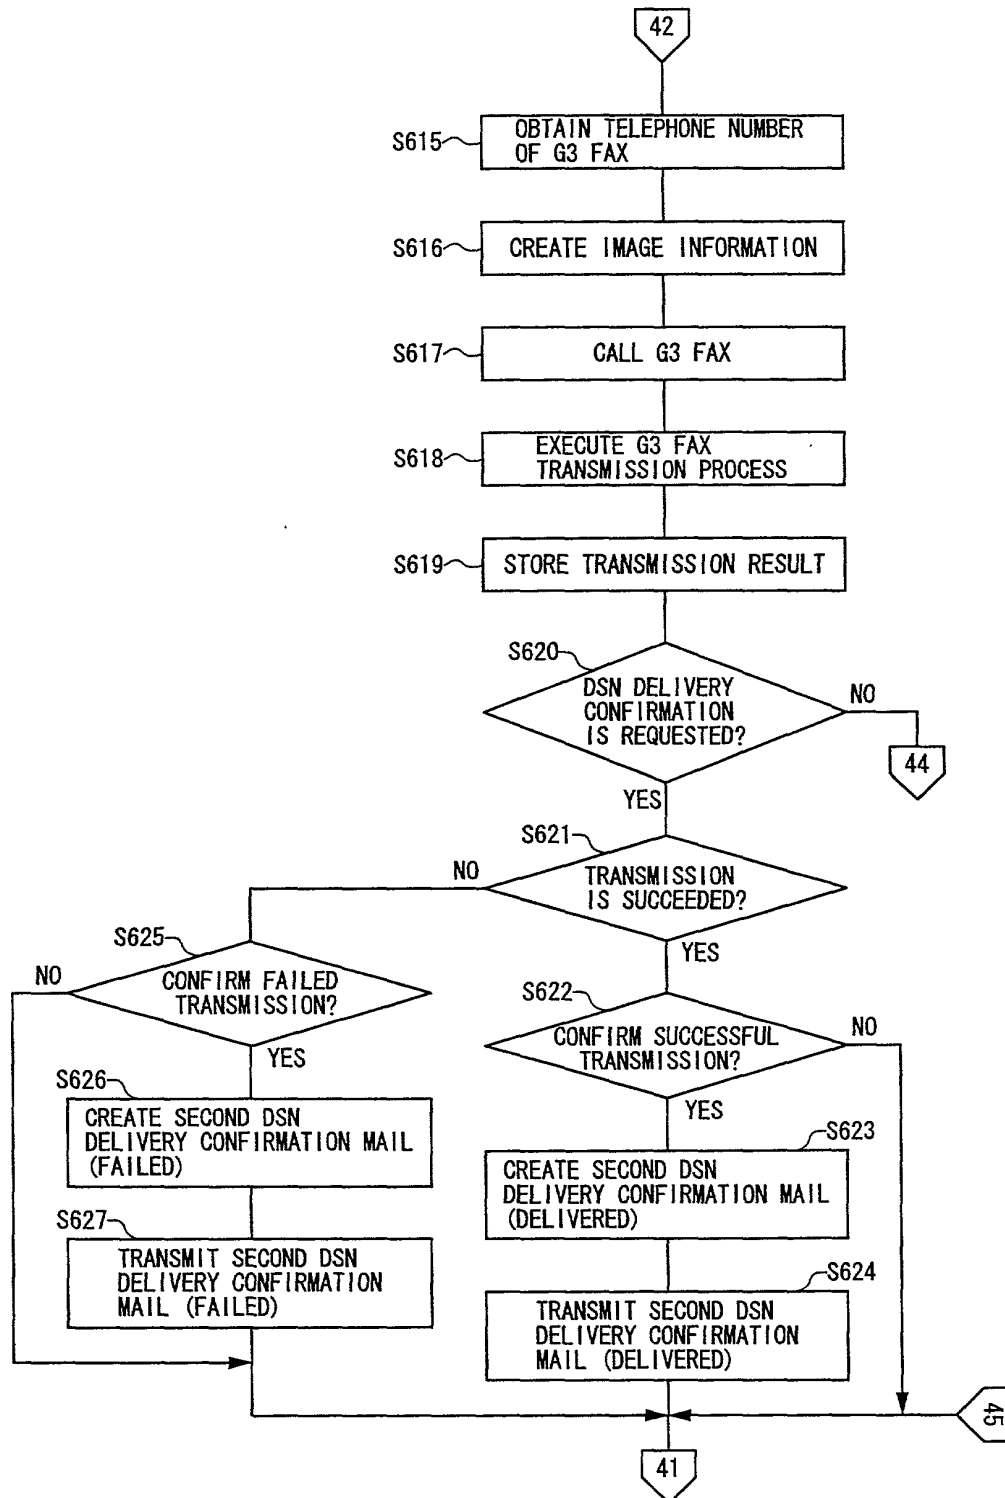

00906044.090600

FIG.28A

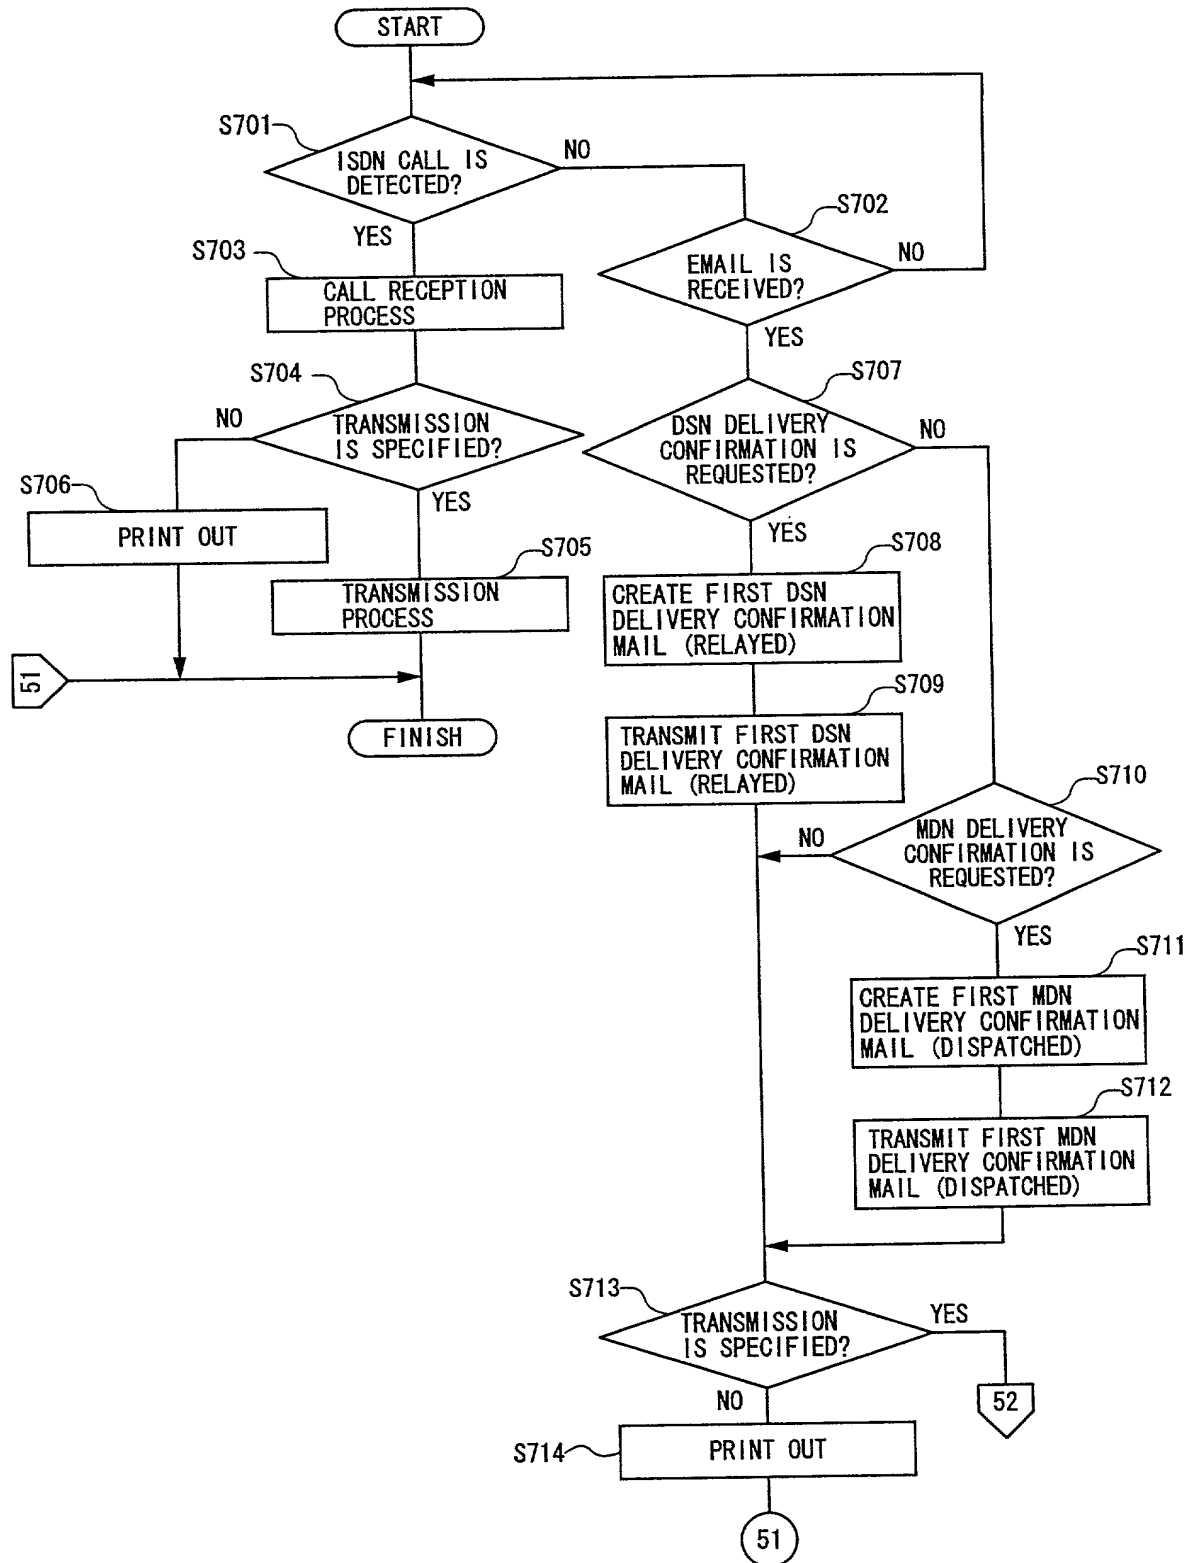

000000"4T495960

FIG.28B


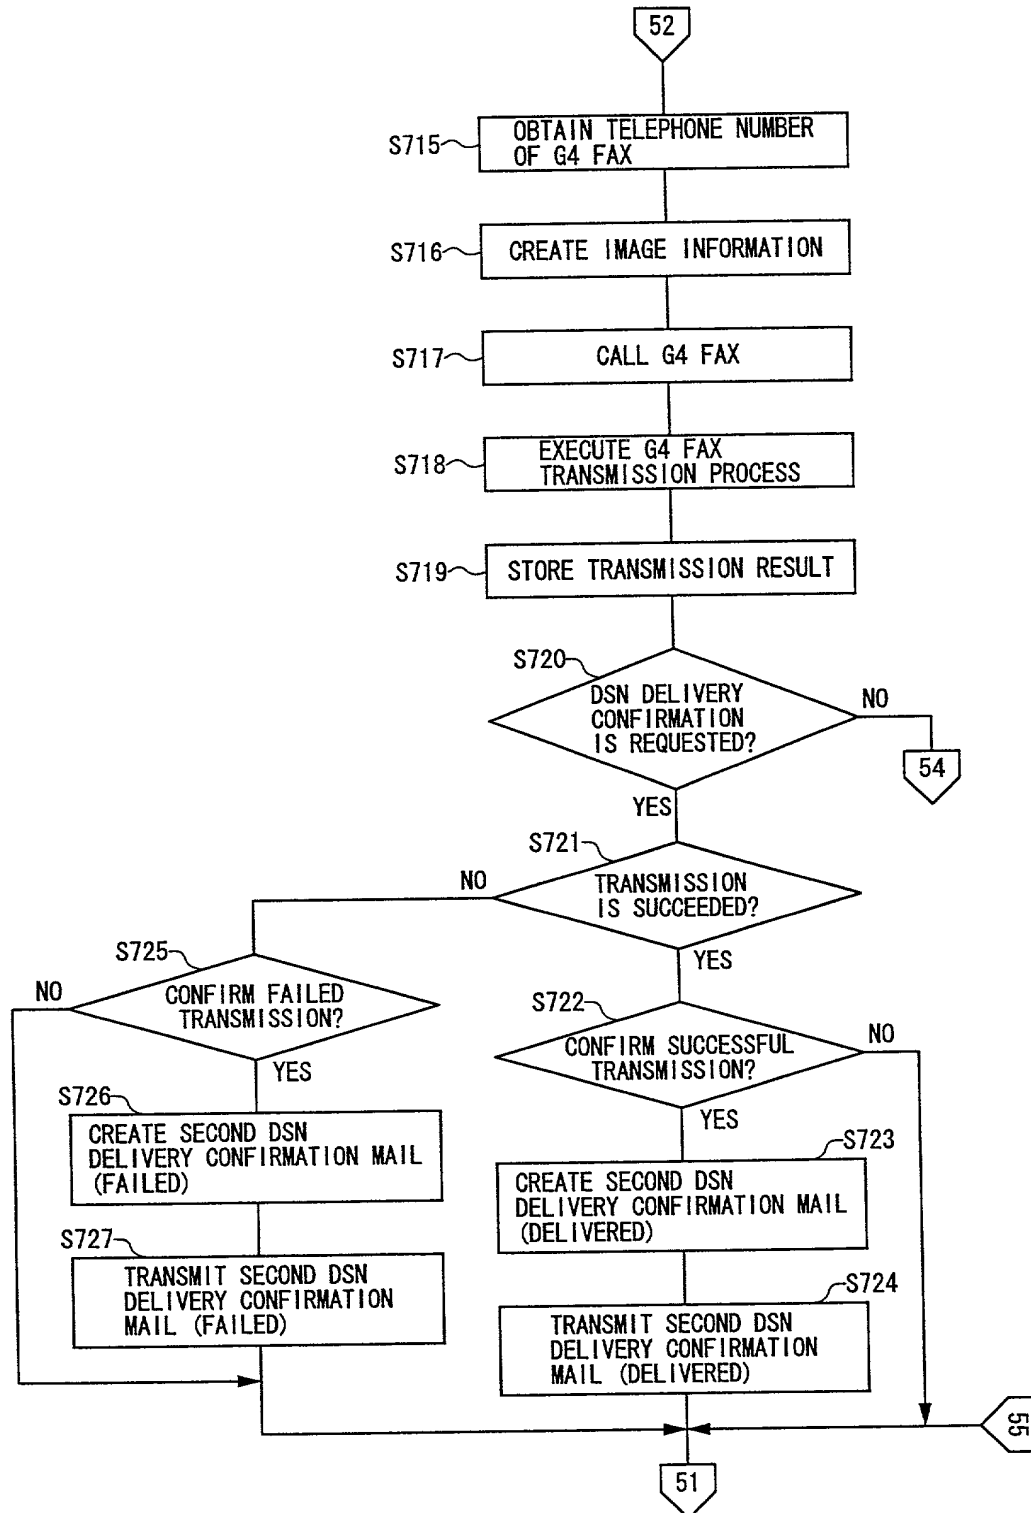


FIG.28C

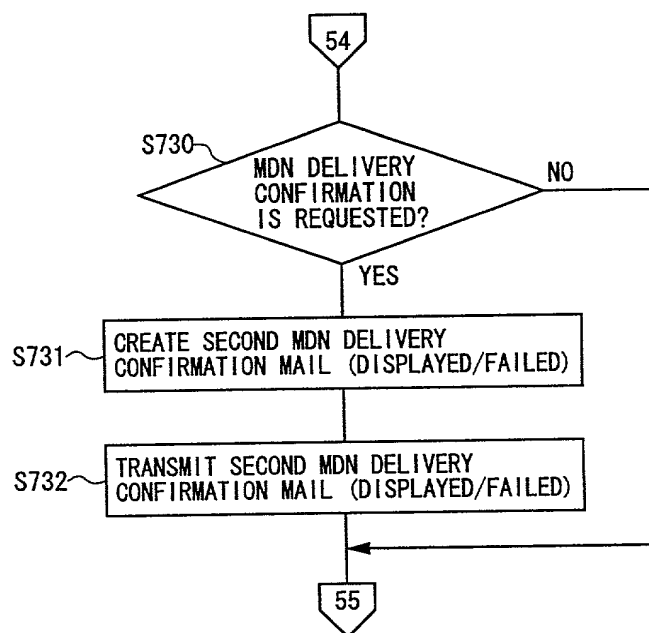

009060" 4749360

050644-060600

My residence, post office address, and citizenship are as stated below next to my name.

INTERNET FACSIMILE GATEWAY DEVICE

(Title of Invention)

X is attached hereto.

_____ was filed on _____

Application Serial No. _____

and was amended by _____
(if applicable)

I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Number</u>	<u>Country</u>	<u>Filing Date</u>	<u>Yes</u>	<u>No</u>
Patent Applications No.11-251035	Japan	6/September/1999	X	
No.2000-045560	Japan	23/February/2000	X	

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States Application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No.Filing DateStatus

<u>Application Serial No.</u>	<u>Filing Date</u>	<u>Status</u>

And I hereby appoint Ivan S. Kavrukov (Reg. No. 25161), Thomas F. Moran (Reg. No. 16579; Christopher C. Dunham (Reg. No. 22031); Norman H. Zivin (Reg. No. 25385), John P. White (Reg. No. 28678); Robert D. Katz (Reg. No. 30141); Peter J. Phillips (Reg. No. 29691); Richard S. Milner (Reg. No. 33970); Gerard M. Wissing (Reg. No. 36309); Richard F. Jaworski (Reg. No. 33515); and George M. Macdonald (Reg. No. 39284) and each of them, all c/o Cooper & Dunham LLP of 1185 Avenue of the Americas, New York, New York 10036 (Tel. 212-278-0400), my attorneys, each with full power of substitution and revocation, to prosecute this application, to make alterations and amendments therein, to receive the patent, to transact all business in the Patent and Trademark Office connected herewith and to file any International Applications which are based thereon under the provisions of the Patent Cooperation Treaty.

Please address all communications, and direct all telephone calls, regarding this application to:

Ivan S. KavrukovReg. No.25161

Cooper & Dunham LLP
1185 Avenue of the Americas
New York, New York 10036
Tel. (212) 278-0400

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or
first joint inventor

HIROSHI TAMURA

Inventor's signature

Hiroshi TamuraCitizenship Japan

Date of signature

August 25, 2000

Residence

Kanagawa, Japanc/o RICOH COMPANY, LTD.,Post Office Address 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo 143-8555, Japan